
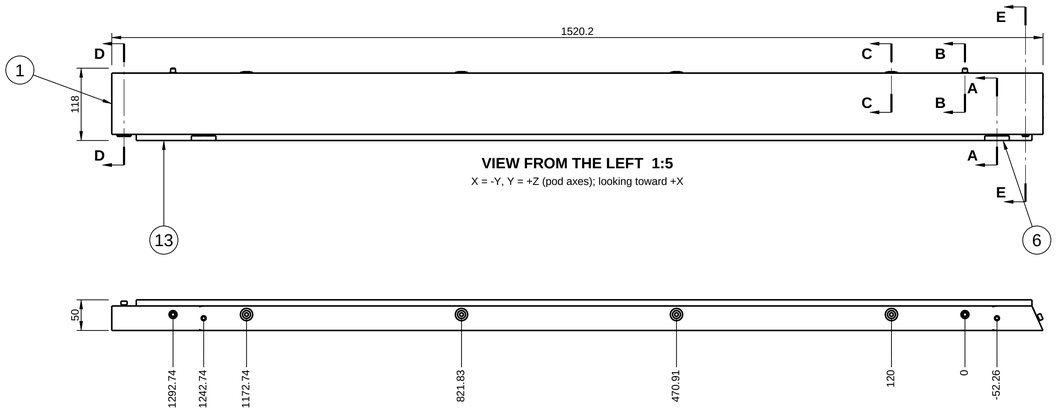


VIEW FROM THE LEFT 1:5

X = -Y, Y = +Z (pod axes); looking toward +X


VIEW FROM ABOVE 1:5

X = -Y, Y = +X (pod axes); looking down (toward -Z)

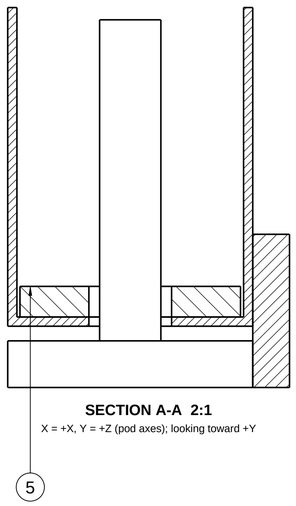


SECTION A-A 2:1

X = +X, Y = +Z (pod axes); looking toward +Y

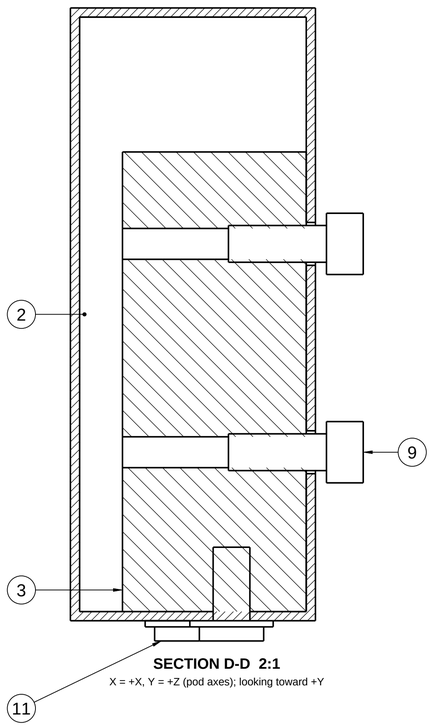


SECTION D-D 2:1

X = +X, Y = +Z (pod axes); looking toward +Y

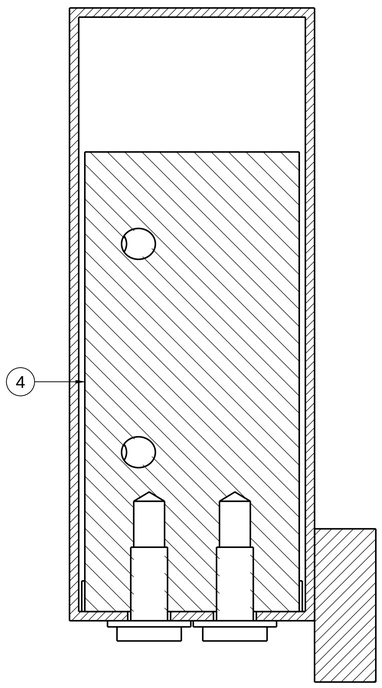


SECTION E-E 2:1

X = +X, Y = +Z (pod axes); looking toward +Y



SECTION B-B 2:1

X = +X, Y = +Z (pod axes); looking toward +Y



SECTION C-C 2:1

X = +X, Y = +Z (pod axes); looking toward +Y

PARTS LIST: 110101 BASE - BAND ASSY - SIDE - LH

ITEM	PART NUMBER	NAME	QTY	MATERIAL	FINISH
1	111101	BASE - BAND TUBE - SIDE - LH	1	aluminium 6063-T6 rectangular tube 100 x 40 x 1.5 (PM ruling; alloy: assumption)	black anodised, matte, 20 um (class AA20, EN ISO 7599)
2	111111	BASE - TUBE END CAP - 97 X 37 X 2 - AL BLACK	1	aluminium sheet EN AW-5005 H14, 2 mm (assumption)	black anodised, matte, 20 um (class AA20, EN ISO 7599)
3	111211	BASE - CORNER KEY - SQUARE - COMMON	1	aluminium EN AW-6061 T6 block 30 x 35 x 75 (joints register J-BASE-02; sizes from the Joints Engineer 2026-11-01)	mill finish (hidden)
4	111212	BASE - CORNER KEY - FRONT - LH	1	aluminium EN AW-6061 T6 block (joints register J-BASE-02)	mill finish (hidden)
5	111601	BASE - GLIDE DOUBLER - COMMON	2	aluminium plate EN AW-6082 T6, 5 mm thick (PM ruling 2026-11-01)	mill finish (hidden inside the band, D-79)
6	111602	BASE - LEVELLING GLIDE - M10 - D40	2	zinc-plated free-cutting steel without lead (11SMn30 / AISI 1215 or similar, assumption), turned in one piece: an M10 x 1.5 stem and a base 40 across, 7.6 tall	zinc plated, clear passivated (assumption)
7	831001	HARDWARE - LOCATING SPIGOT - M6 X Ø8 - STAINLESS	2	stainless steel A2 round bar, turned, M6 stud (assumption)	passivated stainless, bright (assumption)
8	831002	HARDWARE - STOP WASHER - Ø10.5 X Ø20 X 1.5 - AL	4	aluminium sheet 1.5, 5000 or 6000 series (joints register H-08)	mill finish (hidden)
9	838001	HARDWARE - SOCKET HEAD BOLT - M6 X 16 - ISO 4762 8.8 ZINC	4	steel, property class 8.8 (ISO 898-1)	zinc plated (ISO 4042)
10	838003	HARDWARE - RIVET NUT - M6 - STEEL ZINC - SHEREX CAH2-610-4.2	6	steel 1008/1010 (maker)	zinc plated, trivalent passivation (maker)
11	838010	HARDWARE - FLANGED BUTTON HEAD SCREW - M6 X 12 - ISO 7380-2 A2	4	stainless steel A2-70 (ISO 3506-1)	plain stainless, as supplied
12*	838006	HARDWARE - RIVET NUT - M10 - FOR THE LEVELLING GLIDE - HOLD	2	steel C1008/1010 (maker)	zinc plated with yellow trivalent chromate, SFS-01-001 SC2 (maker)
13	118001	BASE - BASE SEAL - LIP - ROOM FLOOR - HOLD	1.462 m	soft lip (sweep) seal, EPDM or TPE, black: a leg bonded to the band's inner face and a fin reaching seal_reach (21.5) below the band's bottom, so it presses on the room floor across the glides' range. Candidate: Trim-Lok X2248, dense EPDM flap 19 to 20 long on a 14.2 x 2.3 leg with 3M acrylic tape, the leg set about 4 below the band's edge so the flap reaches about 23.5; BT-06 decides, an extrusion to BASE's drawing if it fails	black

NOTES

1. Parts, quantities, materials and finishes as the parts list 110000_P01_BASE_BOM.csv (its rows under 110101), word for word; each part's own drawing holds its sizes and tolerances.
2. Items marked * (12 838006) are not in the STEP 110000_P01_BASE_STEP.step P01: they have no balloon; their places are in their rows and the joints register.
3. Views in first angle (ISO 5456-2); each view title gives its X and Y in pod axes (guideline 3.3). Visible outlines only, as an assembly drawing shows them.
4. Interface sizes (ordinates, true mm from the STEP): VIEW FROM ABOVE: the spigot, rivnut and glide centres along the band, from the front spigot (datum B of 111101, joints register R-J6).
5. Fitted at the factory (D-87), in this order: the six M6 rivnuts 838003 set in the band's top face (torque HOLD-01), a stop washer 831002 under the head of each of the four J-BASE-01 bolt rivnuts (joints register H-08); the two spigots 831001 screwed into their rivnuts with threadlocker; the M10 rivnuts 838006 set through the band's bottom face and the 5 mm load blocks 111601 (grip 6.5, PM ruling 2026-11-01); the glides 111602 preset; the back corner key 111211 slid into the back end against the inner wall, its 2 hook stud bolts 838001 through the inner wall and its 2 fixing screws 838010 through the bottom wall (joints register J-BASE-02, D-129); the end cap 111111 in the back end; the lip 118001 bonded along the inner face (D-132) (BASE parts list notes).
6. TOLERANCE: the overall sizes are for reference; each part's drawing holds its own tolerances. Not ISO 2768.

PROJECT: **Spaceship (FocusPod v2)**	STATUS: **DRAFT**	DATE: 2026-11-01	SHEET: **1/1**
TITLE: **BASE - BAND ASSY - SIDE - LH** Viền chân nhôm - cạnh trái (cụm)			
PART NUMBER: **110101**	REV: **P01**	DRAWING NUMBER (FILE): **110101_P01_BASE-BAND-ASSY-SIDE-LH_DWG**	
MATERIAL: MATERIAL: see the parts list			
FINISH: FINISH: see the parts list			
SCALE: 1:5	SIZE: A1	UNITS: **UNITS: mm**	MASS: 2.6059 kg (calculation)
CREATED BY: Autonomous	APPROVED: not released	TOLERANCES: TOLERANCE: see the notes; not ISO 2768	
PROJECTION: ISO first angle (ISO 5456-2)			