
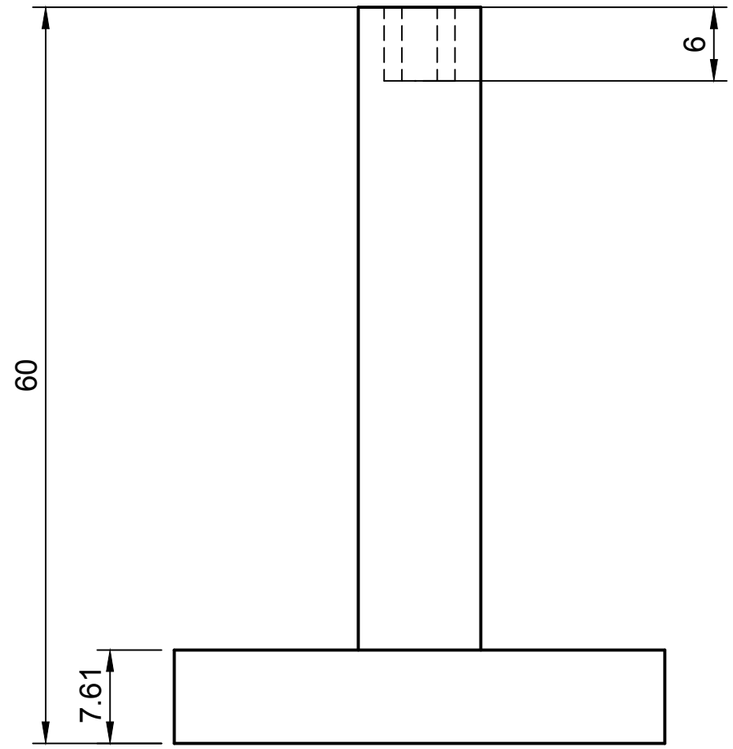


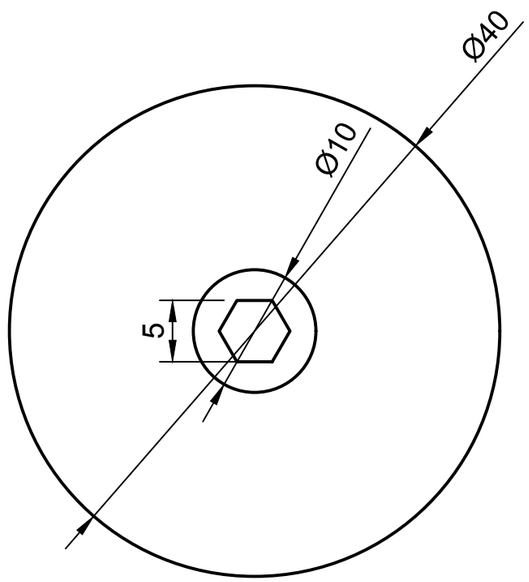

111602 BASE - LEVELLING GLIDE - M10 - D40 / Chân chỉnh cao M10 - đế Ø40
Drawing 111602_P01_BASE-LEVELLING-GLIDE-M10-D40_DWG Rev P01 Status DRAFT (not for production) Sheet 1/1, A3 Scale 2:1
UNITS: mm. Projection: ISO first angle (ISO 5456-2), symbol at right. Do not scale.
Material: zinc-plated free-cutting steel without lead (11SMn30 / AISI 1215 or similar, assumption), turned in one piece: an M10 x 1.5 stem and a base 40 across, 7.6 tall
Finish: zinc plated, clear passivated (assumption)
Process: turned from bar, M10 x 1.5 rolled or cut, the 5 mm hex socket broached in the stem's top, zinc plated
Mass: 0.106 kg (calculation from CAD)
Tolerances: General tolerances ISO 2768-m. Thread M10 x 1.5-6g (ISO 965-1) along the stem (assumption). Base height 7.61 ±0.05 (D-164's 7.6): with the M10 rivnut's head (0.81 to 0.97) it sets the band's lowest setting, 8.5 (PM ruling on F-018). Hex socket 5 across flats, +0.02/+0.14, to fit a 5 mm hex key (as ISO 4762's s 5; assumption). Static rating 3.5 kN or more, proved by BT-04 (D-164).
Datums and axes: Part system: Z the glide's axis, up from the base's bottom face (on the room floor). Datums: A = the base's bottom face, B = the axis. Turned in one piece from zinc-plated free-cutting steel without lead (11SMn30 / AISI 1215 or similar, assumption), zinc plated, clear passivated (D-164).
Holes: Hex socket 5 across flats, 6 deep, in the stem's top: a 5 mm hex key turns the glide from above through the band top's Ø8 key hole (BASE feature rationale FB-06, FG-03).
Sources: CAD 110000_P01_BASE_CAD and the part's own design; feature reasons in v2/02-Drawings/base/FEATURE-RATIONALE.md; status of every number in base_build.py.

Dept.	Technical reference	Created by	Approved by
		Autonomous 1/11/26	
		Document type	Document status: DRAFT
		Title: BASE - LEVELLING GLIDE - M10 - D40	DWG No.: 111602
			Rev.: P01 / Date of issue / Sheet: 1/1