



VIEW FROM BELOW 1:10

X = +X, Y = -Y (pod axes); looking up (toward +Z)

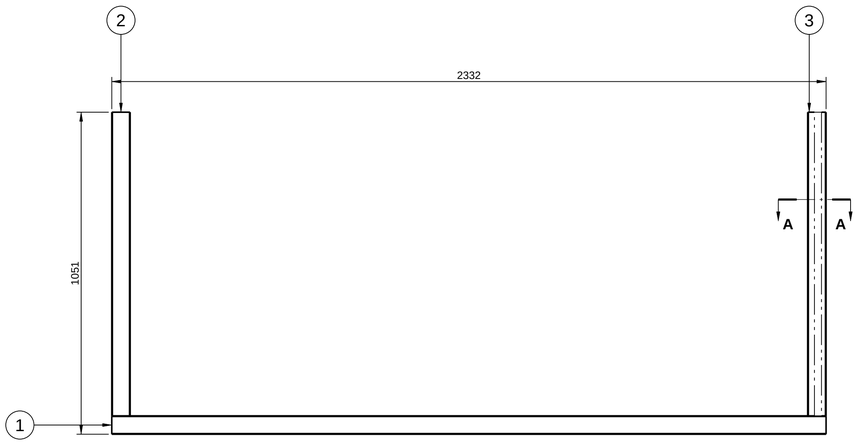


FRONT VIEW 1:10

X = +X, Y = +Z (pod axes); looking toward +Y



SECTION A-A 1:2

X = +X, Y = +Z (pod axes); looking toward +Y



SECTION B-B 1:2

X = +X, Y = -Y (pod axes); looking up (toward +Z)

PARTS LIST: 810201 INTERIOR - LIGHT SHELF ASSY

ITEM	PART NUMBER	NAME	QTY	MATERIAL	FINISH
1	811201	INTERIOR - LIGHT SHELF - BACK	1	Aluminium 5052-H32 sheet (alloy HOLD)	powder coat, charcoal (RAL HOLD)
2	811202	INTERIOR - LIGHT SHELF - SIDE LH	1	Aluminium 5052-H32 sheet (alloy HOLD)	powder coat, charcoal (RAL HOLD)
3	811203	INTERIOR - LIGHT SHELF - SIDE RH	1	Aluminium 5052-H32 sheet (alloy HOLD)	powder coat, charcoal (RAL HOLD)

NOTES

1. Parts, quantities, materials and finishes as the parts list 810000_P01_INTERIOR-PARTS-LIST_BOM.csv (its rows under 810201), word for word; each part's own drawing holds its sizes and tolerances.
2. 718101 ELECTRICAL - LED PROFILE - LIGHT SHELF - SURFACE 23 X 12.5 is drawn as a reference outline (thin long dash double-dot line, ISO 128-20 type 05) and is not an item of this assembly: the parts list puts it under another assembly.
3. Views in first angle (ISO 5456-2); each view title gives its X and Y in pod axes (guideline 3.3). Visible outlines only, as an assembly drawing shows them.
4. Fitted on site, after the ceiling cassettes, along the tops of the side and back walls (assembly guide, step 19): the back run 811201 on the back wall's lining (Y 766), full width (X -1166 to 1166); the side runs 811202 LH and 811203 RH on the side walls' linings, from the soffit's back face (Y -285) to the back run, which they butt (INTERIOR feature rationale F-8102-03, F-8102-04). The underside at Z 2230, the back flange's top at Z 2270 (F-8102-02).
5. HOLD: each run's back flange is screwed to the wall cassettes; the fixing and its spacing are on hold with WALL's cassette tray (F-8102-07), and the parts list names no fixing yet.
6. ELECTRICAL's up-light strip runs on each run's bottom, inside the U, aimed at the felt ceiling; the U is its wiring channel (F-8102-01). ELECTRICAL's down-light LED profile 718101 clips under the right run (F-8102-05). The feed comes through the back run's Ø10 hole at X 355 and the call light's drop through the right run's at Y -209.5, both at Z 2250 (F-8102-06); the feed is plugged in at step 19.
7. TOLERANCE: the overall sizes are for reference; each part's drawing holds its own tolerances. Not ISO 2768.

PROJECT: **Spaceship (FocusPod v2)**	STATUS: **DRAFT**	DATE: 2026-11-01	SHEET: **1/1**
TITLE: **INTERIOR - LIGHT SHELF ASSY** Kệ đèn hất (cụm)			
PART NUMBER: **810201**	REV: **P01**	DRAWING NUMBER (FILE): **810201_P01_INTERIOR-LIGHT-SHELF-ASSY_DWG**	
MATERIAL: MATERIAL: see the parts list			
FINISH: FINISH: see the parts list			
SCALE: 1:10	SIZE: A1	UNITS: **UNITS: mm**	MASS: 1.359 kg (calculation)
CREATED BY: Autonomous	APPROVED: not released	TOLERANCES: TOLERANCE: see the notes; not ISO 2768	
PROJECTION: ISO first angle (ISO 5456-2)			