SEGMENTS

ID	CARRIER	FROM	TO	CABLE	L mm	END A	END B
W20d	COLUMN	chase entry	column fuse block (behind the hub zone cover)	4 x 18 AWG (2 per pole), Class 2	420	Mini-Fit Jr 10-way plug (with W24d), mates W20c behind the column	fuse block input
W24d	COLUMN	chase entry	hub I/O (hub zone)	6 x 24 AWG screened	420	shares W20d's 10-way plug	hub I/O (HOLD H-ELE-05)
W40	COLUMN	F3a 2 A + hub PWM 1, tach 1	supply fan box, high in DR	4 x 20 AWG	1550	fuse block and hub terminals	4-way PWM fan connector into a Y-cable at the fan pair (housing HOLD H-ELE-07)
W41	COLUMN	F3b 2 A + hub PWM 2, tach 2	exhaust fan box, soffit right end	4 x 20 AWG	1260	fuse block and hub terminals	4-way PWM fan connector into a Y-cable (housing HOLD H-ELE-07)
W42	COLUMN	hub sensor port	supply fan box inlet (DR)	4 x 24 AWG screened	1750	hub sensor connector (HOLD, ISS-060)	sensor probe (HOLD H-ELE-06)
W43	COLUMN	F3c 1 A	sensor hub	2 x 18 AWG, Class 2	300	fuse block	hub power connector (HOLD, ISS-060)
W44	COLUMN	BOOST, TEST, CALL buttons and the LIGHT knob	hub inputs	6 x 24 AWG screened	300	button and knob tags	hub inputs (HOLD H-ELE-05)

FORMBOARD 1:5 (lengths to scale along the line; a plug pair, a strip feed ring or a stroke at each end)

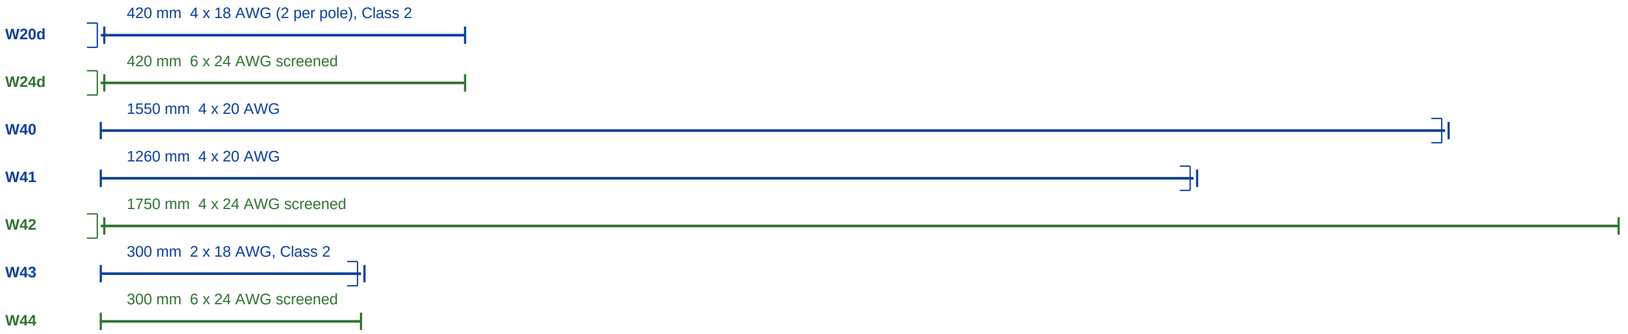

MATERIAL FOR THIS HARNESS (its share of the parts list lines, counted from the segments above)

PART NO.	NAME	QTY
718023	ELECTRICAL - CABLE - 2 X 18 AWG - CLASS 2	0.3 m
718024	ELECTRICAL - CABLE - 4 X 18 AWG - CLASS 2	0.42 m
718025	ELECTRICAL - CABLE - 6 X 24 AWG SCREENED - CLASS 2	0.72 m
718026	ELECTRICAL - CABLE - 4 X 20 AWG	2.81 m
718027	ELECTRICAL - CABLE - 4 X 24 AWG SCREENED	1.75 m
718035	ELECTRICAL - CONNECTOR - MINI-FIT JR PLUG 10 WAY V-0	1 pc

Bushings and edge-protected slots it passes: G-DR, G-SOFFIT (Heyco 2836 / edge strip, parts list 718041, 718042).
Terminals: Mini-Fit Jr female 39-00-0039 (718036) and male 39-00-0041 (718037), one per way.

NOTES
Segments, ends and lengths from the harness list (710000_P01_ELECTRICAL-HARNESS-LIST_SPEC.csv), same revision.
UNITS: mm. GENERAL TOLERANCE: harness segment lengths +20/-0 mm; positions taken from the route model +/-5 mm;
sheet-metal parts ISO 2768-m (their DXF or drawing rules). Status of every number: parts list and harness list.
Every harness segment is tested in the factory before it ships (D-87): continuity, polarity, no shorts, latch pull,
label with its ID. Cables clip to the cassette tray only (D-26). Supply side = receptacle (female contacts).
Bought parts are on HOLD: no order, no supplier contact. Generated by assembly_sheets.py from the model and parts data.

PROJECT	FocusPod v2 - Spaceship
TITLE	**ELECTRICAL - HARNESS - AIR COLUMN: ASSEMBLY**
DWG / PART NO.	710023 (assembly)
REV / STATUS	P01 / DRAFT - not for production
UNITS / SCALE	mm / formboard 1:5; tables not to scale
SHEET	1 of 1 (A2)
DATE / BY	2026-11-01 / ELECTRICAL Engineer
SOURCE	electrical_model.py, electrical_parts.py