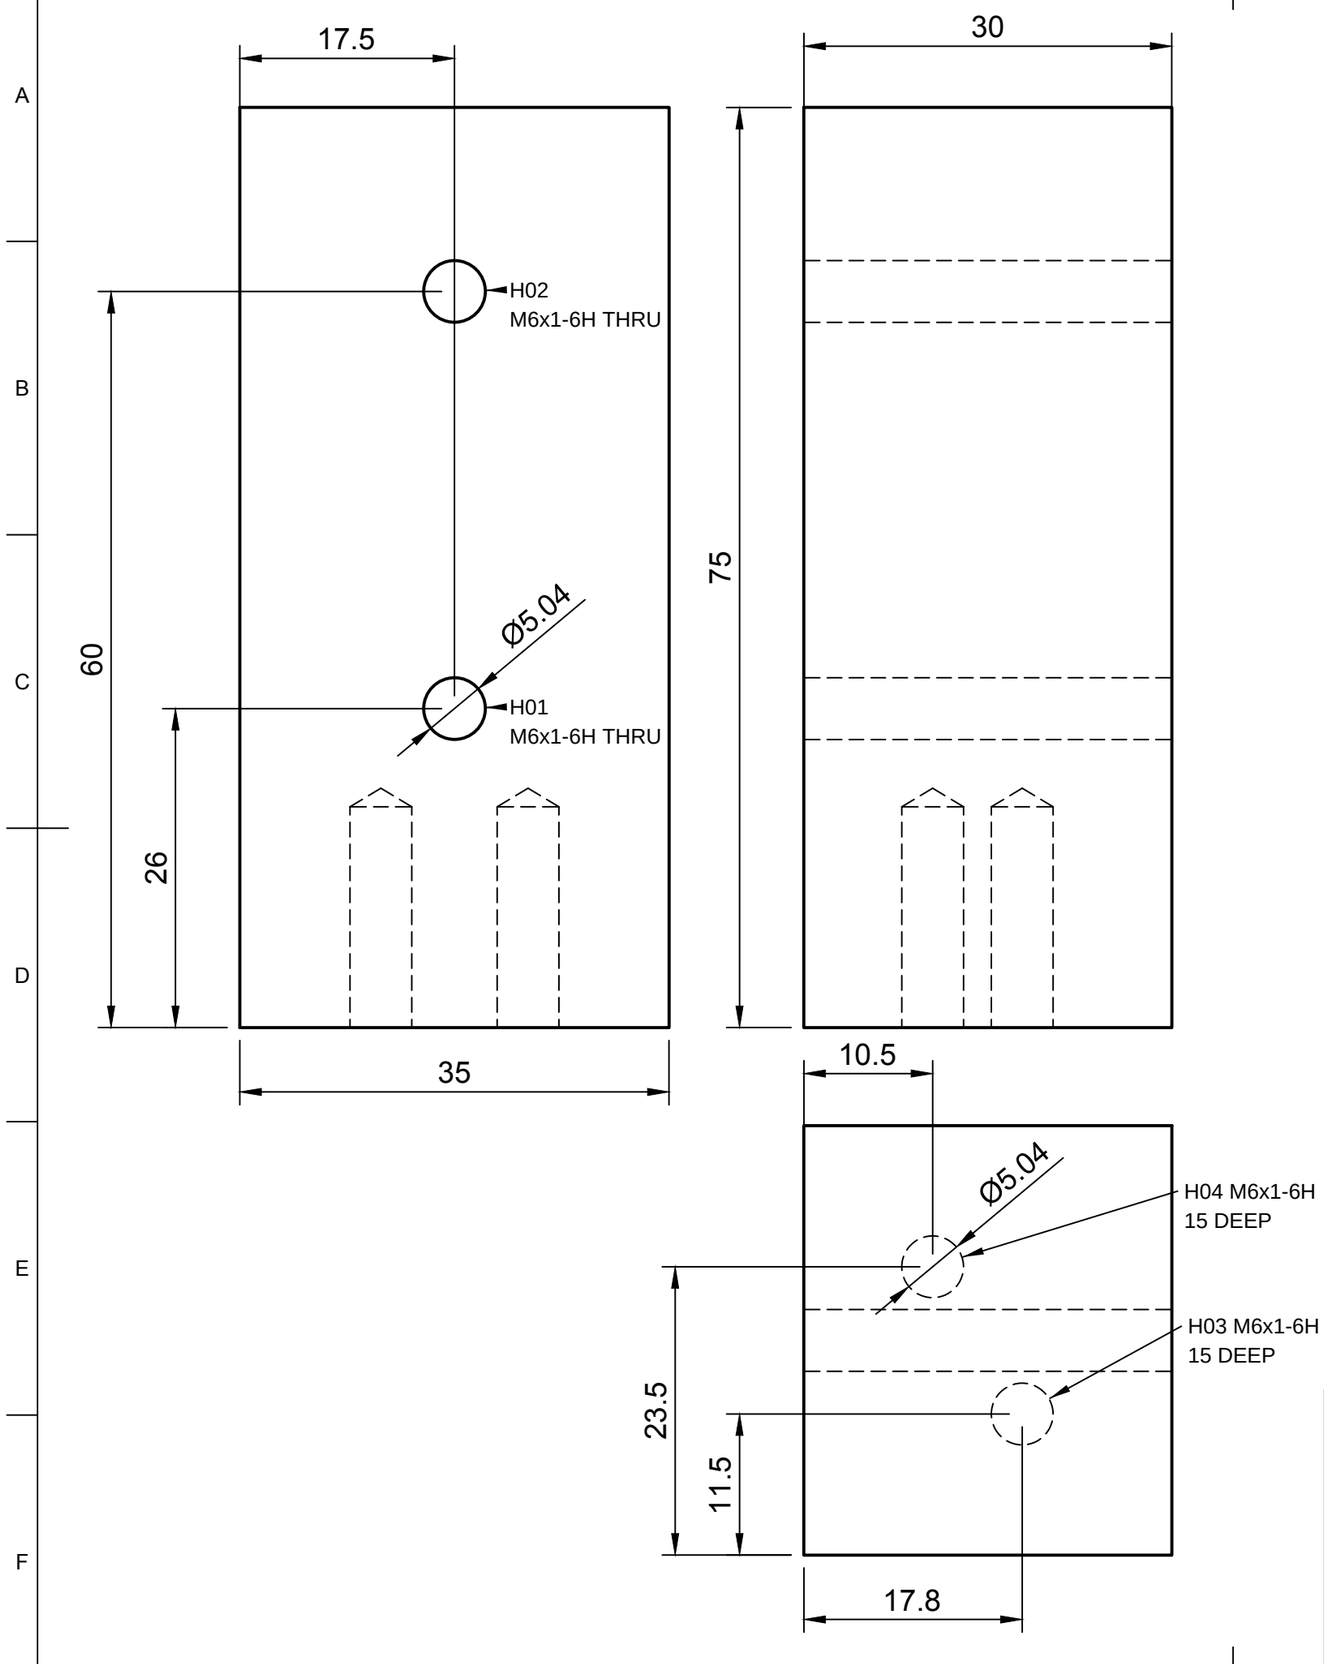


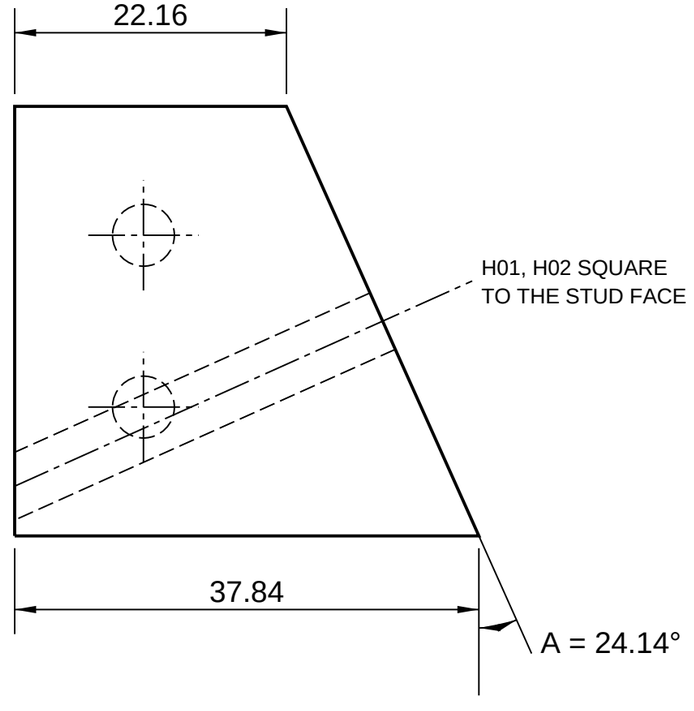

NOTES (111211 TO 111215 P01, PROPOSED) - TABULATED

1. UNITS MM. ISO FIRST-ANGLE PROJECTION. GENERAL TOLERANCE ISO 2768-m UNLESS STATED.
2. MATERIAL EN AW-6061-T6. FINISH MILL FINISH, DEBURRED, NO SHARP EDGES.
3. ONE BLOCK 35 x 75, 30 LONG ON ITS CENTRE LINE. THE STUD FACE IS CUT AT ANGLE A ABOUT ITS CENTRE LINE, LONG SIDE ON THE OUTSIDE OF THE TURN. THE THREE VIEWS SHOW 111211 (A=0); VIEW B SHOWS 111212 FROM ABOVE; 111213 IS 111212'S OPPOSITE HAND (MIRRORED ABOUT THE CENTRE LINE).

| PART | A | HAND | LONG | SHORT | H03, H04 (X, Y) | POD | WHERE |
|---|---|---|---|---|---|---|---|
| 111211 | 0° | - | 30.00 | 30.00 | 10.5, +6; 17.8, -6 | 2 | BACK CORNERS |
| 111212 | 24.14° | LH | 37.84 | 22.16 | 10.5, ±7 | 1 | FRONT LEFT |
| 111213 | 24.02° | RH | 37.80 | 22.20 | 10.5, ±7 | 1 | FRONT RIGHT |
| 111214 | 7.25° | LH | 32.23 | 27.77 | 10.5, ±7 | 1 | LEFT KNEE |
| 111215 | 0° | - | 30.00 | 30.00 | 10.5, ±7 | 1 | FR1 INLINE |

4. H01, H02: M6x1-6H THROUGH, SQUARE TO THE STUD FACE ON ITS CENTRE LINE, 26 AND 60 ABOVE THE BOTTOM; ±0.1 TO THE CENTRE LINE AND THE BOTTOM. CUT ANGLE ±0.25°. THE VIEWS SHOW THE TAPPED HOLES AT THE 6H MEAN MINOR Ø5.04 (TAP DRILL Ø5.0).
5. H03, H04: M6x1-6H, THREAD 15 DEEP, DRILL Ø5.0 x 18, FROM THE BOTTOM, AT THE TABLE'S X (FROM THE BACK FACE) AND Y (FROM THE CENTRE LINE, +Y AS SHOWN), ±0.1 (D-144).
6. JOINTS REGISTER J-BASE-02; POSITIONS v2/01-CAD-Native/joints/corner-keys.csv; ONE STEP PER PART NUMBER IN v2/03-Manufacturing/joints/.

VIEW B, 2:1: 111212 (LH, FRONT LEFT CORNER) FROM ABOVE




| | | | |
|---|---|---|---|
| Dept. / Technical reference | | Created by: Autonomous 1/11/26 | Approved by |
| | | Document type | Document status: DRAFT |
| | | Title: BASE - CORNER KEY - TABULATED: 111211, 111212, 111213, 111214, 111215 | DWG No.: 111211 |
| | | | Rev.: P01 / Date of issue / Sheet: 1/1 |