
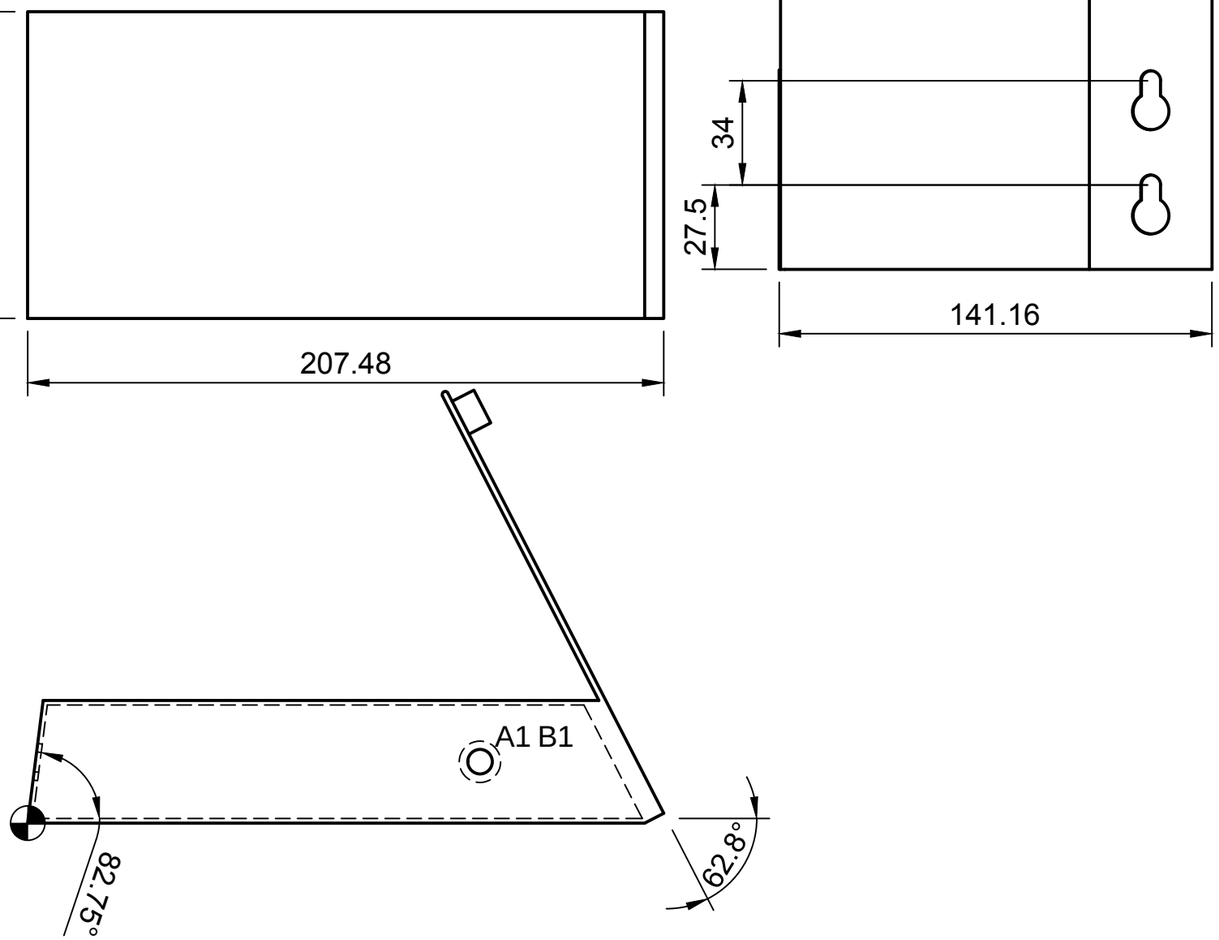




HOLES SEEN FROM ABOVE (THE BOTTOM WALL'S AS HIDDEN LINES), ORIGIN O = DATUMS C, B			
Hole	X Dim	Y Dim	Description
A1	147.55	20	Ø8 x 1.5
B1	147.55	20	Ø13.5 x 1.5

111105 BASE - BAND TUBE - FRONT - FACET 2 - LH / Viền chân trước - mặt vát 2
Drawing 111105_P01_BASE-BAND-TUBE-FRONT-FACET-2-LH_DWG Rev P01 Status DRAFT (not for production) Sheet 1/1, A3 Scale 1:2 (iso 1:4)
UNITS: mm. Projection: ISO first angle (ISO 5456-2), symbol at right. Do not scale.
Material: aluminium 6063-T6 rectangular tube 100 x 40 x 1.5 with a welded 1.5 mm knee end plate, a welded 7 mm door-end block and a welded 2 mm door-end plate (alloy: assumption)
Finish: black anodised, matte, 20 um (class AA20, EN ISO 7599)
Process: saw cut (knee mitre, door end square to X), weld the knee end plate, the door-end block and the door-end plate, grind flush, CNC drill and cut the keyholes, deburr, anodise
Mass: 0.381 kg (calculation from CAD)
Tolerances: General tolerances, PROPOSED until the shop confirms them: cut length +0/-0.5; hole positions ±0.2 from datum C along the band and ±0.2 from datum B across it (joints register R-J6: Ø7.0 bolt holes on the wall side positioned ±0.2 from the spigot hole); rivnut holes Ø10.00 +0.10/0 and the glide's rivnut hole Ø13.50 +0.15/0 (D-163). Not ISO 2768 on the anodised faces.
Datums and axes: Part system CS-111105: X along FL2's outer face from its knee end (the long point of its mitre), Y inward square to it, Z up from the band's bottom face. Datums: A = the top face (DL's seat), B = the knee end plate's outer face, C = the outer face (Y 0). End cuts: the knee 7.25 deg off square (82.75 deg to the outer face); the door end 27.2 deg off square (62.8 deg), parallel to DL's door face. At the door end: a 7 mm block welded on to reach DL's door face, and a 2 mm plate welded into it, flush with DL's door face, from FL2's inner face to the kick strip's back line (112.6 wide), from the band's bottom face to its top, its back edge a full round R1 (the PM's hinge-side ruling); on the plate's door face the strike pad 8 x 12 x 65 (thickness HOLD), from the bottom face up, centred on the glass line. Weld, grind flush and anodise with FL2: one part.
Holes: Top wall: the glide's key hole Ø8 (DL's base spigot went with D-169). Bottom wall: the glide's rivnut hole Ø13.50 +0.15/0 (D-163); both in the hole table. Knee end plate: 2 keyholes on the plate's centre line, a Ø12 entry 10 below each seat and a 6.5 slot up to it, the seats 27.5 and 61.5 above the bottom face (J-BASE-02, the knee key 111214's studs).
Sources: CAD 110000_P01_BASE_CAD and the part's own design; feature reasons in v2/02-Drawings/base/FEATURE-RATIONALE.md; status of every number in base_build.py.

Dept.	Technical reference	Created by	Approved by
		Autonomous 1/11/26	
		Document type	Document status: DRAFT
		Title: BASE - BAND TUBE - FRONT - FACET 2 - LH	DWG No.: 111105
			Rev.: P01 / Date of issue / Sheet: 1/1