

FOLDS B1-B1: 211301_P01_WALL-SKIN-SIDE-LOWER-LH_DXF.dxf
V-groove and fold: UP, the fold closes toward the viewer of the flat pattern as drawn; each line at the middle of its fold's outside arc (the flat develops along the outer face: each leg to its arc, plus the arc)


TAG	LINE IN THE FLAT (mm)	DIRECTION	ANGLE	OUTSIDE RADIUS	GROOVE
B1	x 45.57 from the left edge	UP	90°	R2	groove A of the Alcorest guide: a 110° V on the back face with a 2 mm flat root, leaving 0.1 to 0.5 of core on the 0.21 outer skin; fold 90°, outside radius over 2 (guide 01/2021/HDTC-VD, 4.4, 4.5)

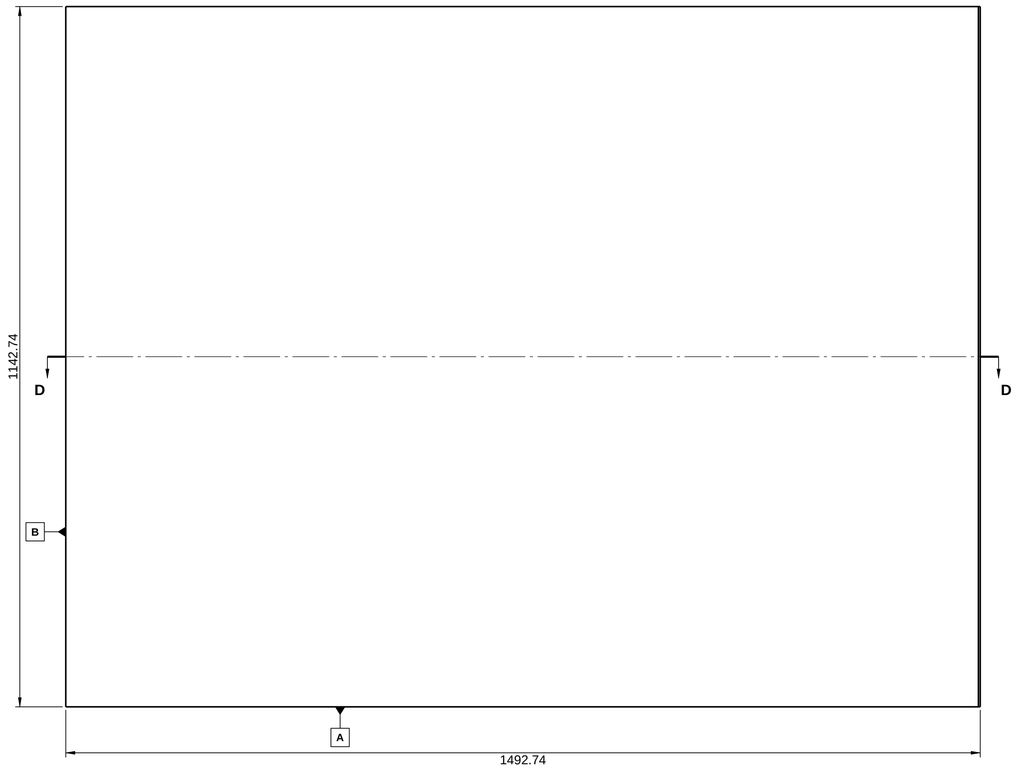

PRINCIPAL VIEW 1:5
X = +Y, Y = +Z (pod axes); looking toward -X



SECTION D-D 2:1
across the bends, at the middle
at its folded end
X = +Y, Y = -X (pod axes)
looking down (toward -Z)

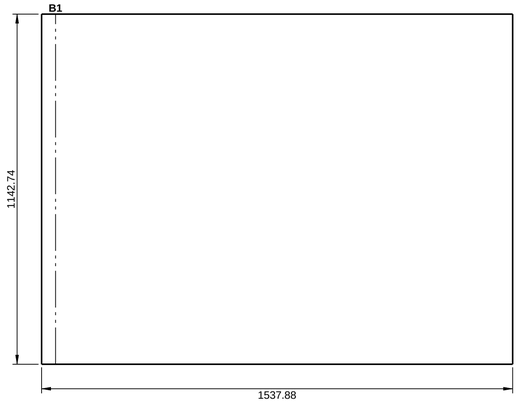

FLAT PATTERN 1:10
from 211301_P01_WALL-SKIN-SIDE-LOWER-LH_DXF.dxf, as its x and y draw it: the side it shows faces you
bend lines thin chain, B1 to B1
UP: the flange folds toward you

PROJECT: **Spaceship (FocusPod v2)**	STATUS: **DRAFT**	DATE: 2026-11-01	SHEET: **1/2**

TITLE
WALL - SKIN - SIDE LOWER - LH
Vách trái - tấm ốp alu dưới

PART NUMBER	REV	DRAWING NUMBER (FILE)
211301	**P01**	**211301_P01_WALL-SKIN-SIDE-LOWER-LH_DWG**

MATERIAL
MATERIAL: ACP 3 mm Alcorest outdoor, PE-type core (HW-SEL A1)

FINISH
FINISH: PVDF coated EV3038 Dark Yellow (maker's coil coating; D-12)


SCALE	SIZE	UNITS	MASS
1:5 (sections D-D 2:1) (flat pattern 1:10)	A1	**UNITS: mm**	6.141 kg (calculation)

CREATED BY	APPROVED	TOLERANCES
Autonomous	not released	TOLERANCE: see the notes; not ISO 2768

PROJECTION
ISO first angle (ISO 5456-2)

GENERAL NOTES

1. UNITS: mm. Do not scale the drawing. ISO first-angle projection (ISO 5456-2), symbol in the title block. Dimensions to ISO 129-1. Sheet 1: views, sections and hole tables; sheet 2: these general notes.
2. Views: the principal view looks toward -X (X = +Y, Y = +Z (pod axes); looking toward -X); every view's title gives its own X and Y and how they map to the pod axes (conventions section 4). On every view X runs right and Y up.
3. GROOVE AND FOLD (Alcorest guide 01/2021/HDTC-VD, 4.1, 4.4, 4.5, figures 4.4 and 4.5): rout the groove from the back with a carbide end mill (2 to 4 flutes, 20 000 to 30 000 rpm, 3 to 5 m/min) or a carbide disc cutter (for example 12 in, 3 000 to 5 000 rpm, 5 m/min) shaped to the 110° V with its 2 mm flat root. The root never touches the outer aluminium: 0.1 to 0.5 of core stays on it. Clamp the panel between two rigid supports and fold evenly along the whole edge; an outside radius under 2 cracks the face and voids the maker's warranty.
4. Outside radius 2 min, per the maker's guide No. 01/2021/HDTC-VD; the first fold of each batch is a test fold that confirms the blank and the core left before the batch. The blank develops along the outer face at that radius: 0.86 less than the sum of the sharp outside lengths (the Lead's ruling, 2026-11-01).
5. BOND (D-137, bond spec section 8): Sikaflex-252, one joint at least 12 wide x 3 on every frame member, the 3 set by fixing-tape pieces in line with the bead, and one 3 mm joint, as wide as the return allows up to 12, between the return and the frame's back end; both faces pre-treated with an abrasive pad, Sika Aktivator-205 and Sika Primer-210; laid face down on a flat table with the ACP face as datum.
6. FILM (guide 1.1, 2.2): fit every panel with the arrows printed on its film the same way; peel the film by hand, no heat, within 45 days of the start of fitting; no marker, vinyl or tape on the coated face after that.
7. Edges flush with the frame's top and bottom: the outside reveal is the 2.26 seam gap (D-23).
8. V-grooved and folded from the flat pattern v2/03-Manufacturing/wall/211301_P01_WALL-SKIN-SIDE-LOWER-LH_DXF.dxf (sha256 d926e517ad76): its CUT outline, its BEND lines the folds' lines. The outer skin runs round each fold unstretched, so the flat develops along the outer face: each leg to its fold's outside arc (R2, the model's), plus the arc, each line at the arc's middle (the DXF checked against the model's flanges, every line within 0.05). Groove: groove A of the Alcorest guide: a 110° V on the back face with a 2 mm flat root, leaving 0.1 to 0.5 of core on the 0.21 outer skin; fold 90°, outside radius over 2 (guide 01/2021/HDTC-VD, 4.4, 4.5). Flange lengths are outside sizes, to each fold's outside sharp.
9. TOLERANCES (PROPOSED until the shop confirms; not ISO 2768): cut sizes ±0.5 (CNC router; assumption, guideline 6.3); the blank and the fold line as the batch's test fold confirms them (HOLD H16); fold 90° ±1° (assumption); outside radius 2 min (Alcorest guide 4.5); colour difference between panels ΔE 2 or less (Alcorest guide 2.1).
10. Source: v2/03-Manufacturing/wall/211301_P01_WALL-SKIN-SIDE-LOWER-LH_STEP.step (sha256 1a390bcc85a4; declared unit cm, read in mm and checked against tools/checks/stepfile.py, worst box difference 0 mm); parts list v2/03-Manufacturing/wall/210101_P01_WALL-PANEL-ASSY-SIDE-LOWER-LH_BOM.csv. From that STEP: regenerate it, never edit the PDF.

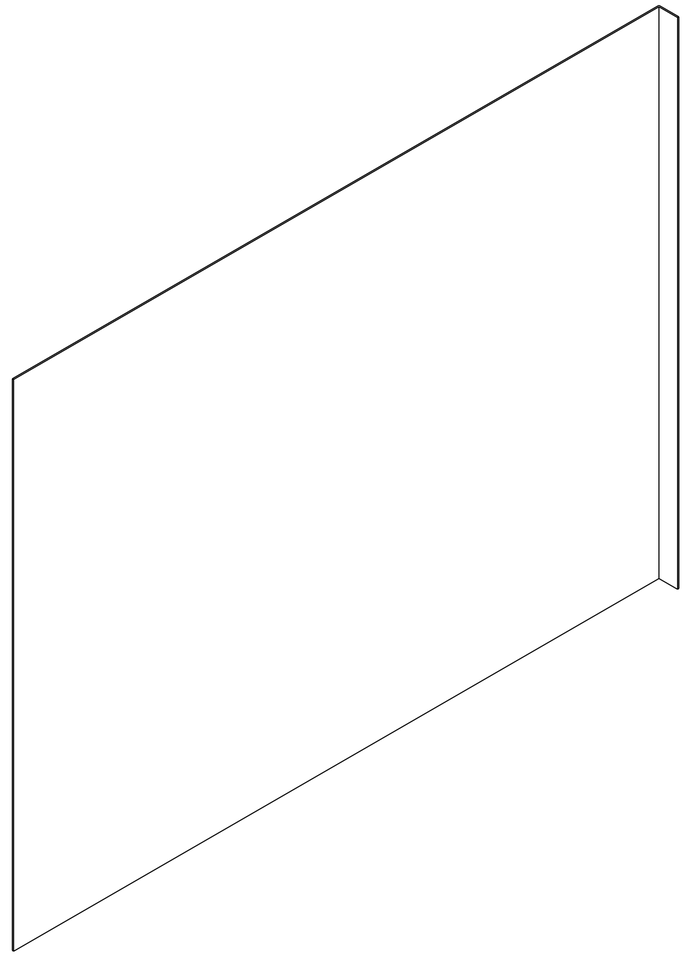

ISOMETRIC VIEW 1:5
for identification only

PROJECT **Spaceship (FocusPod v2)**	STATUS **DRAFT**	DATE 2026-11-01	SHEET **2/2**

TITLE
WALL - SKIN - SIDE LOWER - LH
Vách trái - tấm ốp alu dưới

PART NUMBER	REV	DRAWING NUMBER (FILE)
211301	**P01**	**211301_P01_WALL-SKIN-SIDE-LOWER-LH_DWG**

MATERIAL
MATERIAL: ACP 3 mm Alcorest outdoor, PE-type core (HW-SEL A1)

FINISH
FINISH: PVDF coated EV3038 Dark Yellow (maker's coil coating; D-12)

SCALE	SIZE	UNITS	MASS
1:5 (sections D-D 2:1) (flat pattern 1:10)	A1	**UNITS: mm**	6.141 kg (calculation)

CREATED BY	APPROVED	TOLERANCES
Autonomous	not released	TOLERANCE: see the notes; not ISO 2768

PROJECTION
ISO first angle (ISO 5456-2)