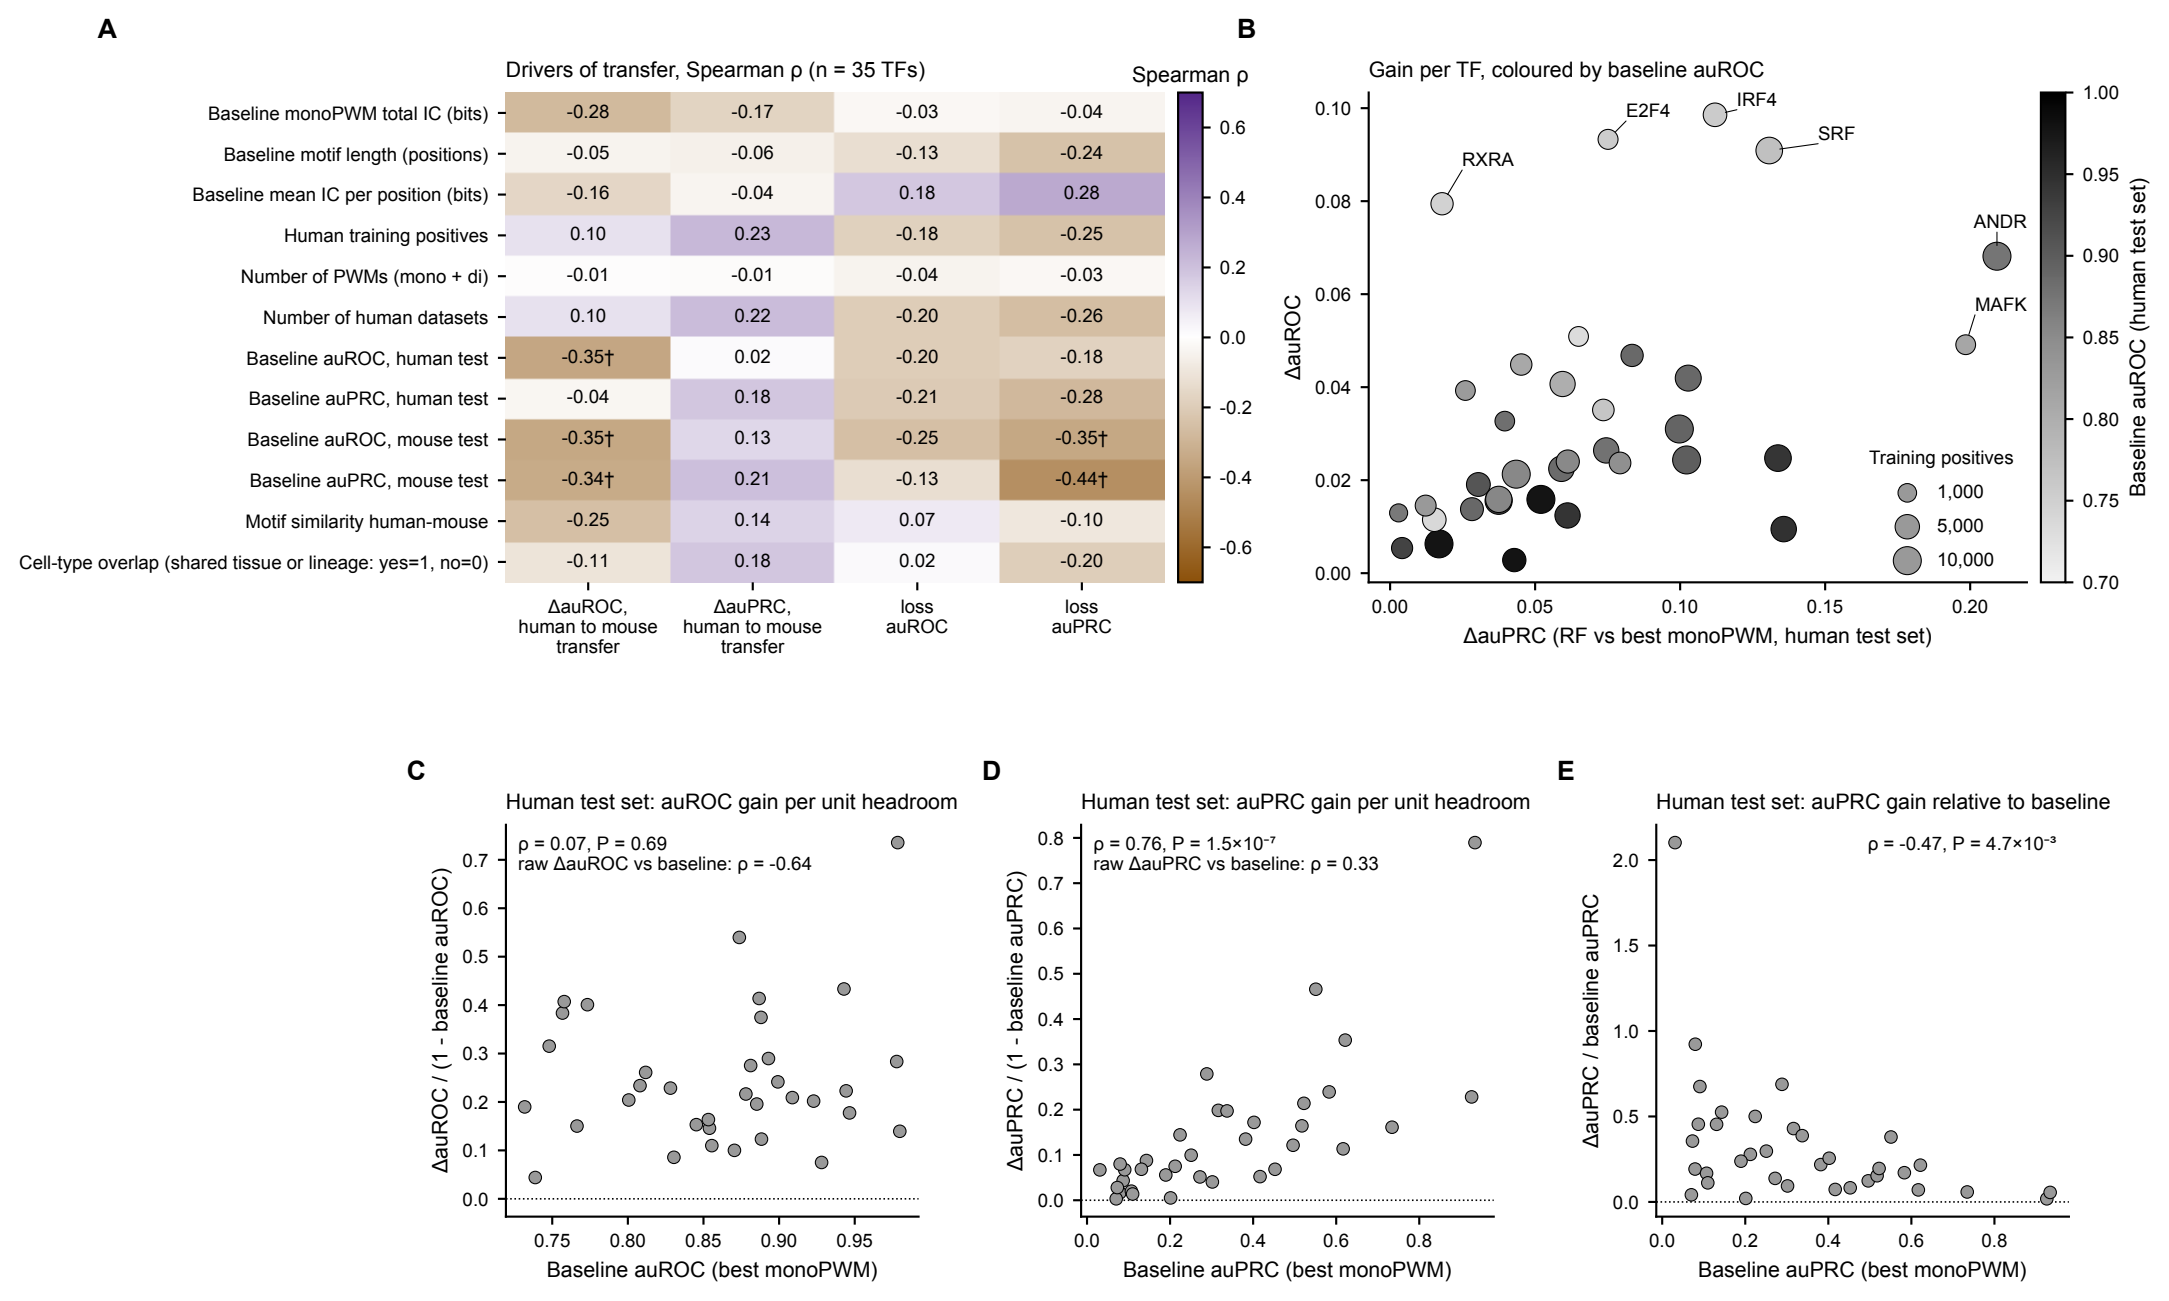

A
Drivers of transfer, Spearman ρ (n = 35 TFs)
Spearman ρ
Baseline monoPWM total IC (bits)
Baseline motif length (positions)
Baseline mean IC per position (bits)
Human training positives
Number of PWMs (mono + di)
Number of human datasets
Baseline auROC, human test
Baseline auPRC, human test
Baseline auROC, mouse test
Baseline auPRC, mouse test
Motif similarity human-mouse
Cell-type overlap (shared tissue or lineage: yes=1, no=0)
-0.28 -0.17 -0.03 -0.04
-0.05 -0.06 -0.13 -0.24
-0.16 -0.04 0.18 0.28
0.10 0.23 -0.18 -0.25
-0.01 -0.01 -0.04 -0.03
0.10 0.22 -0.20 -0.26
-0.35† 0.02 -0.20 -0.18
-0.04 0.18 -0.21 -0.28
-0.35† 0.13 -0.25 -0.35†
-0.34† 0.21 -0.13 -0.44†
-0.25 0.14 0.07 -0.10
-0.11 0.18 0.02 -0.20
ΔauROC, human to mouse transfer
ΔauPRC, human to mouse transfer
loss auROC
loss auPRC
B
Gain per TF, coloured by baseline auROC
ΔauROC
ΔauPRC (RF vs best monoPWM, human test set)
Baseline auROC (human test set)
Training positives
1,000
5,000
10,000
E2F4
IRF4
SRF
RXRA
ANDR
MAFK
C
Human test set: auROC gain per unit headroom
ρ = 0.07, P = 0.69
raw ΔauROC vs baseline: ρ = -0.64
ΔauROC / (1 - baseline auROC)
Baseline auROC (best monoPWM)
D
Human test set: auPRC gain per unit headroom
ρ = 0.76, P = 1.5×10⁻⁷
raw ΔauPRC vs baseline: ρ = 0.33
ΔauPRC / (1 - baseline auPRC)
Baseline auPRC (best monoPWM)
E
Human test set: auPRC gain relative to baseline
ρ = -0.47, P = 4.7×10⁻³
ΔauPRC / baseline auPRC
Baseline auPRC (best monoPWM)