LOOK INSIDE

PKG-006 · Shelter & Infrastructure Pack

Sample pages from: Tactical Cabin Structural Blueprint Load Data

These are unaltered pages from the actual guide, taken from the current fixed library (Stage 4, 2026-10-30). Every EOTWSG guide opens with an action card, states its safety boundaries up front, and ends with printable fields for your household.

Full pack: shop.eotwsg.com · 14-day no-questions refund · Household license

Tactical Cabin Structural Blueprint & Load Data

EOTWSG | MODULE 02 | REV 2026-09-22 | STATUS: SOURCE-VERIFIED ONLY

Authored by: EOTWSG

REVISION LOG

Date	Revision	Description
2026-09-22	REV 2026-09-22	Front-matter standardization: cover block, revision log, action card, and local fields added; source normalized to house Typst dialect.

ACTION CARD

Use this guide to credit: Excerpts, schematics, and tactical protocols adapted from the End of the World Survival Guide (EOTWSG) by Matthew Danielson. Reproduce only for off-grid resilience and survival training.. Carry one copy in the master box and one copy in the working binder.

Step	Do this now	Completion check	Stop / escalate when
1	Confirm this copy is current: check the module ID (02) and REV date on the cover.	Module ID and REV noted on the working copy.	If the REV predates 2026-09-22, replace this copy before use.
2	Work through the Design Basis section against your household's actual people, conditions, and equipment.	Section completed with household-specific entries; gaps flagged.	If a required capability is missing, flag it in the binder and resolve before the next drill.
3	Record completion, date, and any deviations in the working binder; schedule the next review.	Binder entry dated and filed.	If the household situation changes, re-run the guide.

PURPOSE AND ACTIVATION

Purpose: Credit: Excerpts, schematics, and tactical protocols adapted from the End of the World Survival Guide (EOTWSG) by Matthew Danielson. Reproduce only for off-grid resilience and survival training.

Activation triggers: utility failure, evacuation order, sudden service uncertainty, or a planned verification drill. This module is usable on its own; linked module IDs preserve the shared decision order from the master index.

20 ft × 30 ft — 600 sq ft — 4:12 Shed Roof — Owen Sound Basis

Design Basis

Parameter	Locked input	Design / review note
Footprint	20 ft × 30 ft = 600 sq ft	Confirm setbacks, occupancy, fire separation, and site survey.
Roof	Shed-style, single slope, 4:12 pitch	Standing-seam metal; verify drainage, snow drift, attachment, and solar loads.
Snow	60 psf minimum / 2.8 kPa	Engineer to confirm ground, roof, drift, importance, and combinations.
Wind	105 mph / 170 km/h, 3-second gust	Engineer to confirm exposure, components, cladding, uplift, and connections.
Foundation	Helical piles or reinforced concrete piers below 48 in frost line	Geotechnical, frost, lateral, uplift, and settlement review required.
Framing	2×6 studs at 16 in O.C.	Coordinate sheathing, headers, bracing, insulation, penetrations, and fire protection.

Conceptual Plan Data

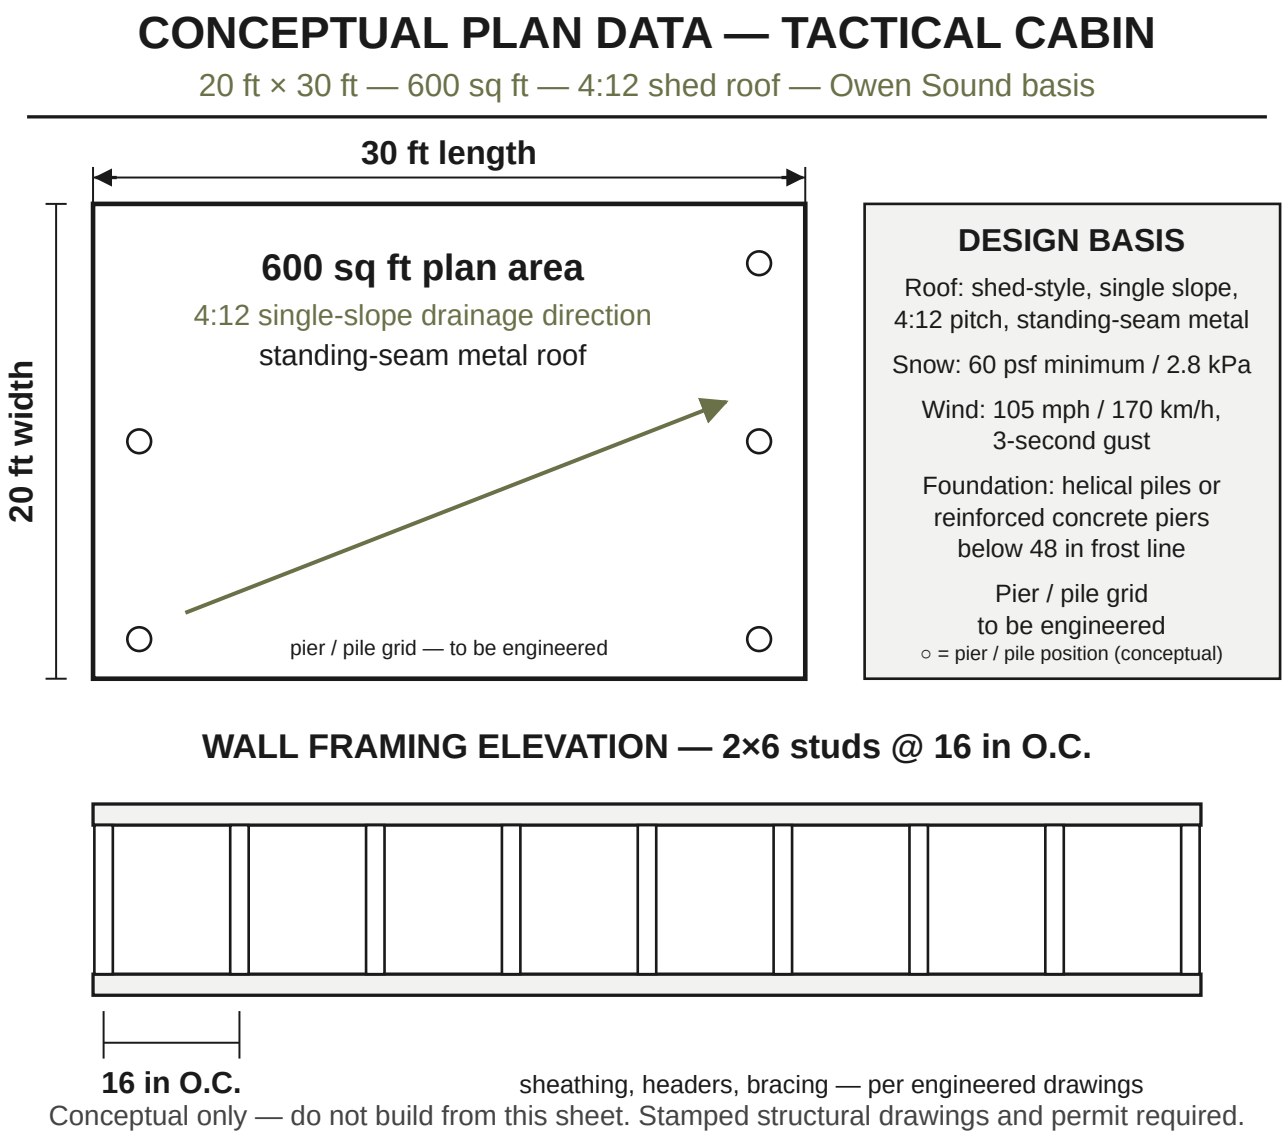


Figure 1: Cabin floor plan and framing data.

Load and Envelope Coordination

1. Design for a minimum 60 psf snow load and a 105 mph / 170 km/h three-second gust wind basis, then apply the adopted IBC/OBC load combinations and site-specific parameters.
2. Engineer roof members, connections, sheathing, bracing, bearing, uplift, and drift zones; do not infer member sizes from this sheet.
3. Locate frost-protected helical piles or reinforced concrete piers below the local 48-inch frost line after site and geotechnical review.
4. Reserve pass-through envelopes for solar utility conduits, mini-split linesets, active battery-room ventilation channels, and woodstove/chimney heat clearances.
5. Provide a construction material take-off only after engineered drawings, wall schedules, openings, and connection details are complete.

Construction Material Take-Off Notes

Scope	Baseline	Take-off fields	Engineer / builder confirmation

Foundation	Piles or piers below frost line	Count, diameter, depth, reinforcement, brackets, uplift/lateral capacity	**Confirm:** _____
Floor	600 sq ft footprint	Joists, beams, insulation, vapor control, sheathing, connectors	**Confirm:** _____
Walls	2×6 @ 16 in O.C.	Stud count, headers, sheathing, bracing, spray foam, openings	**Confirm:** _____
Roof	4:12 standing-seam shed roof	Rafters/trusses, metal panels, clips, snow retention, flashing, drainage	**Confirm:** _____
Penetrations	Reserved service envelopes	Sleeves, fire stopping, weather sealing, clearances, labels	**Confirm:** _____

STRUCTURAL SAFETY

Snow, wind, fire, foundation, and connection failures can cause collapse or death. Do not build from this conceptual sheet. Obtain stamped structural drawings and local permit approval before procurement or construction.

Credit: Excerpts, schematics, and tactical protocols adapted from the End of the World Survival Guide (EOTWSG) by Matthew Danielson. Reproduce only for off-grid resilience and survival training.

SAFETY BOUNDARIES

WARNING - MODULE LIMITS

Do not perform medical, electrical, or structural procedures beyond this guide's stated limits. When in doubt, stop and consult qualified professionals. This guide is a preparedness aid, not a guarantee of safety. Follow current instructions from local emergency management and authorities.

- This module directs specific actions; those actions carry the safety limits stated above. Do not improvise beyond them.
- Use nonviolent de-escalation and withdrawal as the primary security response.
- If conditions exceed the household's capability, escalate to professional responders.

LOCAL FIELDS AND RECORDS

Use these printable fields and keep them at the front of the working binder:

Field	Fill-in
Household / location name	**Name:** _____
Primary contact	**Name and number:** _____
Date completed	**Date:** _____
Next review date	**Date:** _____