

Owner's Manual, Installation Instruction and Trouble Shooting Guideline:

Applies to the following models:

1. F250 (2013-2016) | SYNC 2 with Auto Climate Control(2013-2016) | SYNC 2 with Auto Climate Control
2. F350 (2013-2016) | SYNC 2 with Auto Climate Control(2013-2016) | SYNC 2 with Auto Climate Control
3. F450 (2013-2016) | SYNC 2 with Auto Climate Control(2013-2016) | SYNC 2 with Auto Climate Control

Important: Please ensure your phone is not connected to the original system in any way, including via USB or Bluetooth. You may need to go into the “Original” Bluetooth menu and delete the existing pairing record before proceeding.

Before the installation, please confirm you ordered the correct model for your vehicle: [HERE](#)

Before You Begin, Please Read the Following Instructions Carefully

- 1. Important: Make sure your phone is NOT connected to the original system via USB or Bluetooth. Before proceeding, delete and unpair any existing Bluetooth connections from BOTH the original vehicle system and your phone.**
- 2. For SYNC 2, the system requires both the original SYNC APIM module and original CD Player to be installed and working together with the new system. The APIM must be transferred to the new unit correctly, otherwise the system will not function properly.**

Note: This model for F250 / F350 / F450 (2013–2016) only supports SYNC 2. If your vehicle has been upgraded to SYNC 3, it will not be compatible, and we would kindly recommend downgrading back to SYNC 2 before installing the new system. Please note that the only features that rely on the original SYNC 2 system are the radio and the camera.




SYNC 2 Module



SYNC 3 Module

3. Please ensure that all connectors are securely connected to the correct ports behind the new unit.

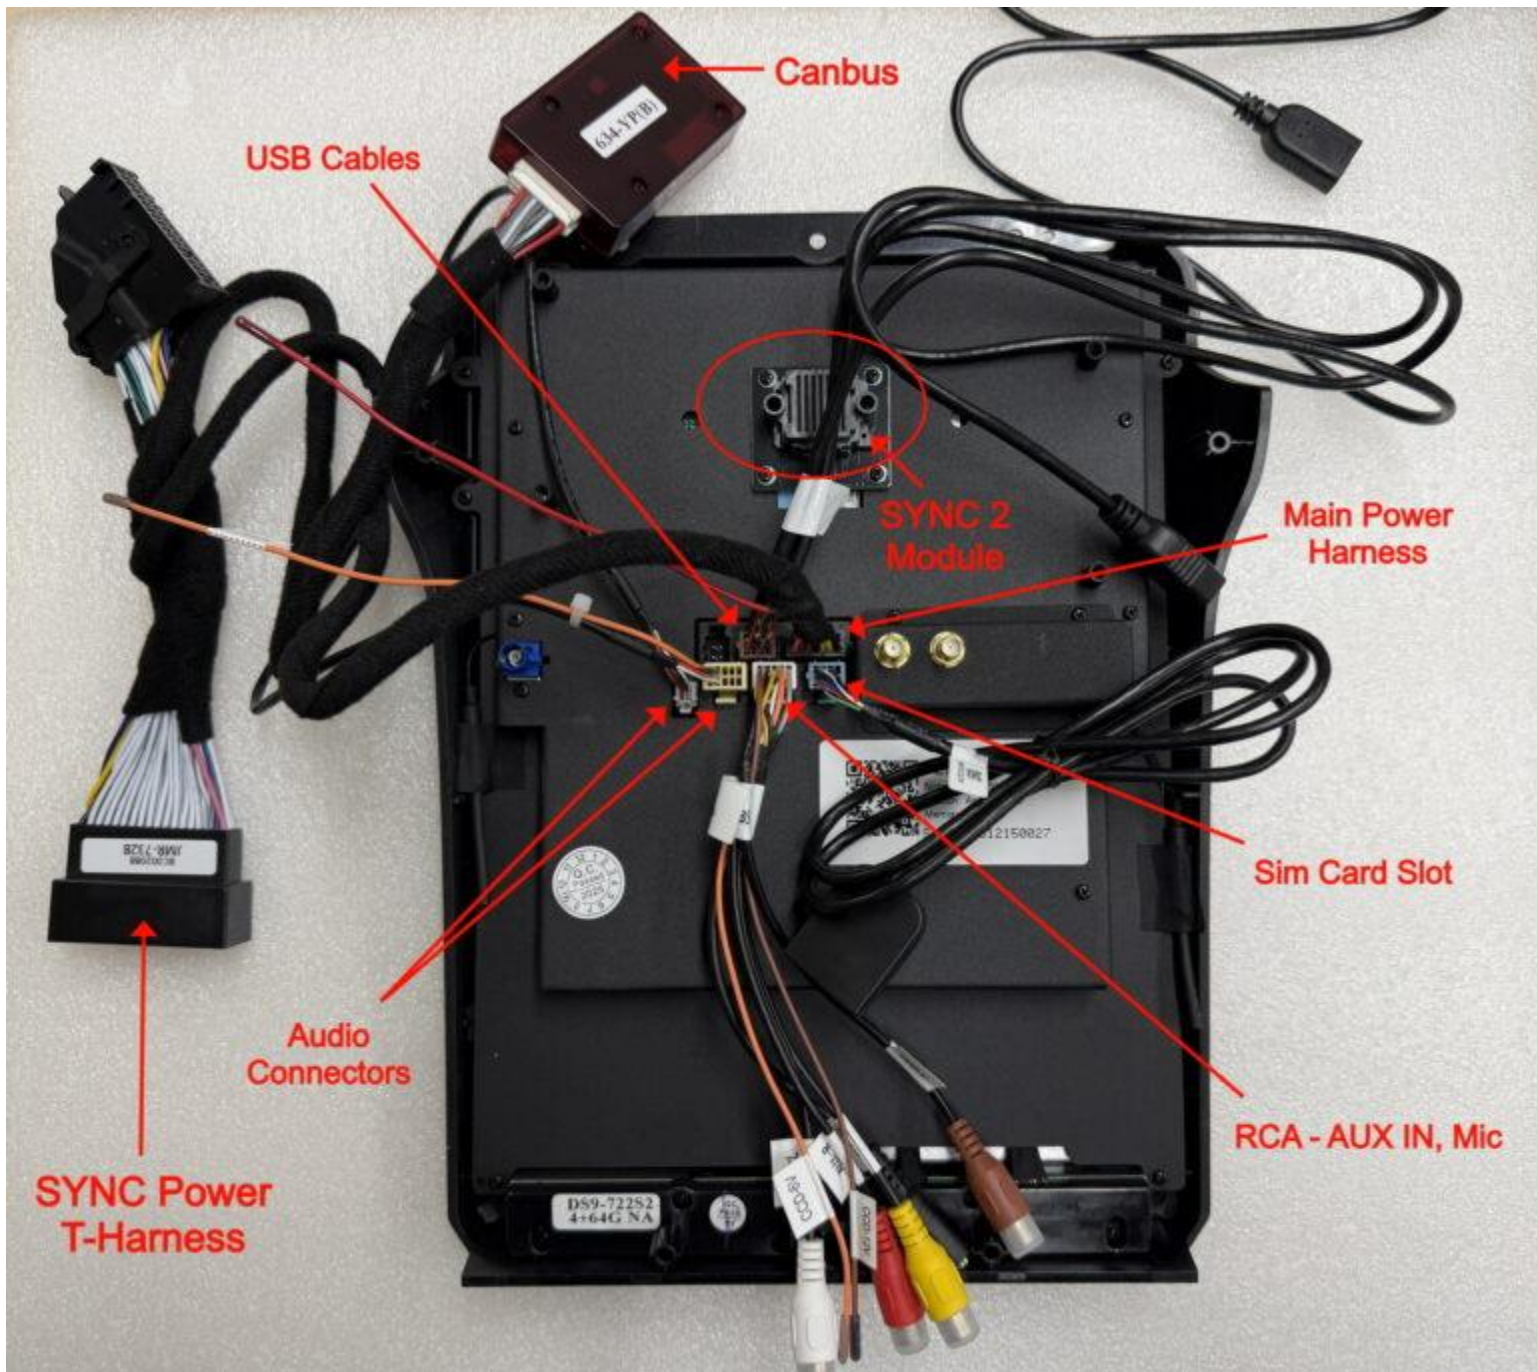

4. Important: System Configuration After Installation

Set the correct Vehicle Protocol

1. On the Android home screen, open Settings.
2. Go to Systems → Setting Guide (Enter Password: 666888).
3. Tap Car Model / AC Model.
4. Make sure Protocol is set to “Xinbasi”
5. After tapping Car Model / AC Model, double-click the correct vehicle model on the right side, then wait for the system to reboot automatically.
6. Return to the home screen of the new system, then tap Console to display the original factory screen. Check whether the original screen appears and is properly aligned on the new system.



5. Original SYNC 2 Menu Touch Screen Issue

If the Tesla screen works properly but the touch points on the original SYNC 2 menu are reversed or incorrect, please follow the steps below.

Note: The SYNC 2 screen can be accessed by tapping the “Console” icon on the Tesla screen.

- Tap “Console” to activate the original SYNC 2 screen.
- Use one finger to press and hold on the SYNC 2 screen area for about 15 seconds.
- The screen will turn black and then restart automatically.
- After the screen turns back on, test the touch function again to confirm the issue is resolved.

6. Audio Connection


Note:

- For SYNC 2, the system requires both the original SYNC APIM module and original CD Player to be installed and working together with the new system. The APIM must be transferred to the new unit correctly, otherwise the system will not function properly.
- The audio from the new system is routed through the vehicle’s ORIGINAL USB channel. Original Radio must be remain connected inside. In some cases, you may need to connect an external USB flash drive to the “ORIGINAL” USB port to

activate the factory USB audio source. First, copy at least one MP3 music file onto a USB drive, then insert the USB flash drive into the vehicle's original factory USB port (not the USB from the new screen). On the new screen, tap "Console" to open the original SYNC system, then go to Media → USB and play the MP3 file. Once the music starts playing, press the Home icon to return to the Android screen and open the "HD MOVIE" app. If the USB music stops at this point, it means the audio channel has successfully switched to the Android system.

SYNC 2 Audio Connection Procedure:

- **Prepare USB:** Copy at least **one MP3 file** to a USB drive.
- **Plug USB:** Insert it into the **original factory USB port** (not the new screen USB).
- **Open SYNC:** Tap "**Console**" on the new screen.

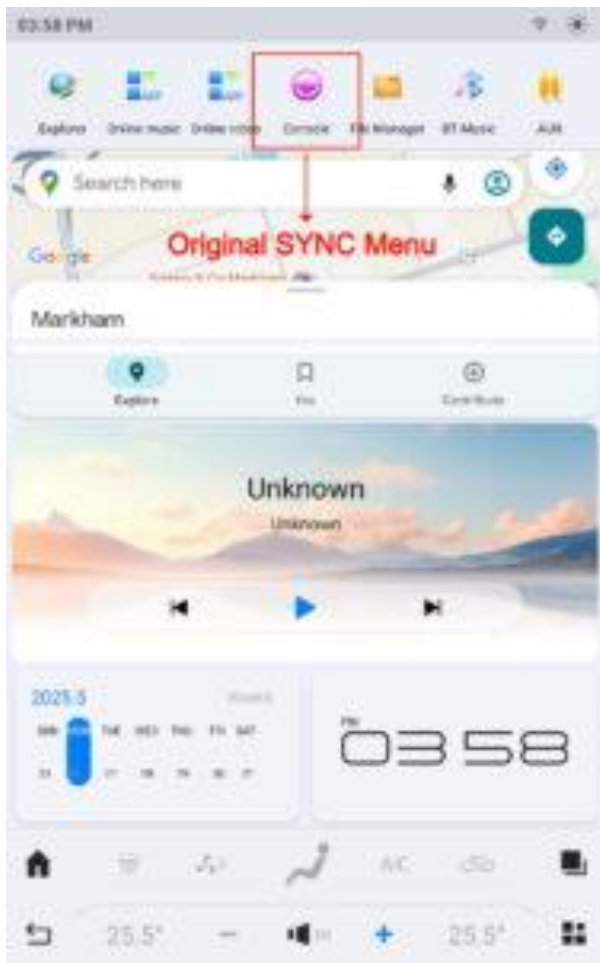

- **Play Music:** Go to **Media** → **USB** and **play the MP3 file**.
- **Return Home:** Press the **Home icon** to go back to Android.
- **Open App:** Tap "**HD MOVIE**".



If the **USB music** stops, the **audio channel** has switched to the **Android system** successfully.

SYNC 2 Audio Connection Video Tutorial:



Trouble Shooting:

Original CD Player / Radio need to be stayed inside for SYNC 2 vehicles. SYNC Module / APIM also need to be transferred to the back of the new system. New system needs to work together with the original radio and original SYNC module.

1. Ensure the **original CD player** remains **connected** inside the vehicle.
2. Make sure the **original SYNC 2 system** displays properly in **Console mode**.
3. Confirm your phone is **not connected** to the **original radio** via **Bluetooth** or **USB**.
4. Ensure a **USB flash drive** with a **music file** is connected to the **original USB port**.
5. Verify that **both audio connectors** behind the unit are properly connected.

[Installation Video Instruction (Ford F250 F350 F450| 2013-2016 | SYNC 2):]

Note: For SYNC 2, the system requires both the original SYNC APIM module and original CD Player to be installed and working together with the new system. The APIM must be transferred to the new unit correctly, otherwise the system will not function properly.



SYNC 2 Audio Connection Tutorial:



[How to use / setup the new infotainment system – Comprehensive Guideline]

The video tutorial below will show you step by step how to use and setup the infotainment system at the beginning. Please feel free to watch this video if you have any questions on how to operate the system.



How to change wallpaper on your tesla infotainment system?


1. **Switch to Modern Theme**
Go to **Settings** → **General** → **Theme**, and select **Modern**.
(Wallpaper is only supported in Modern theme.)

2. **Install Google Wallpaper**
Open the **App Store**, download **Google Wallpaper**, and install it.
3. **Apply Wallpaper**
Open the **Google Wallpaper** app and choose your new wallpaper.



Wiring Instruction:

Note: Please carefully inspect the wiring harness before installation and ensure that there is no damage or any loose pins.

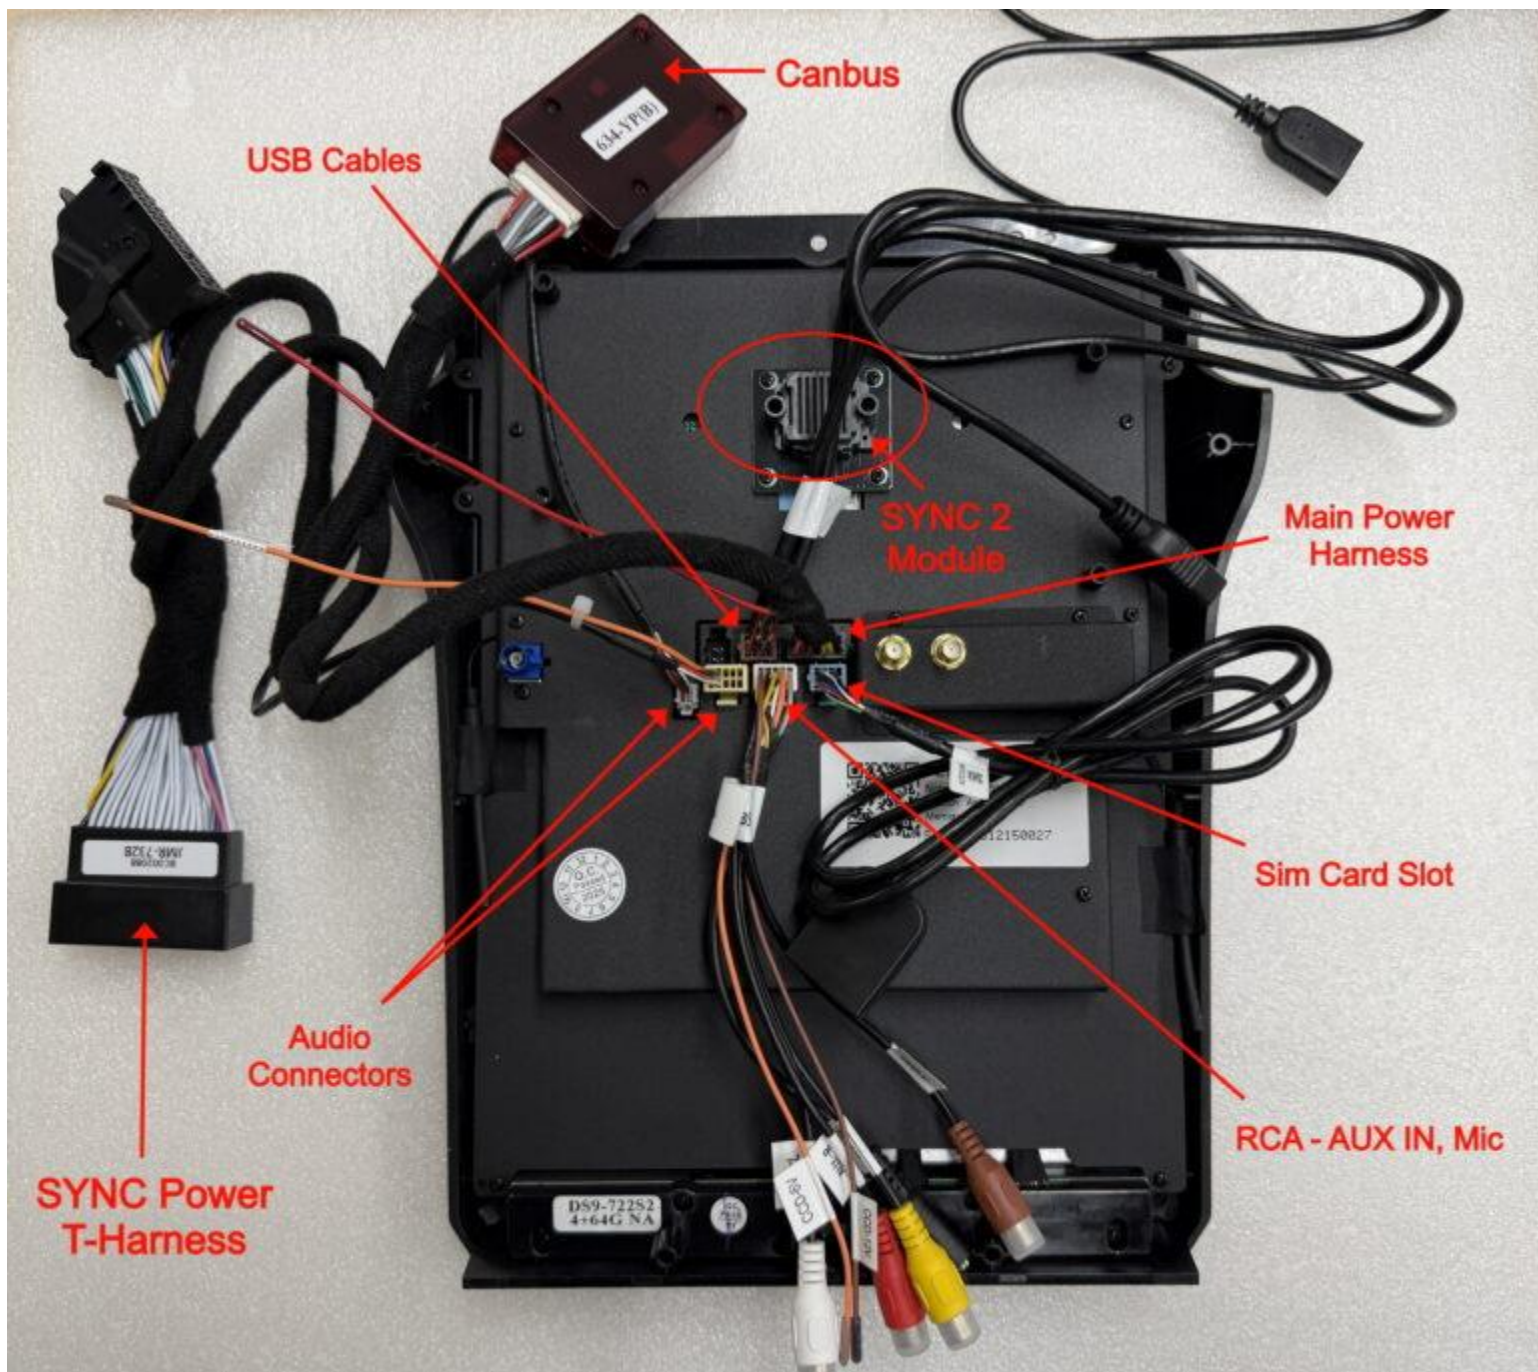

[Car Model / AC Settings]

Protocol Settings:

Note: If your vehicle is an F250, F350, or F450, please select “F150” instead, and ensure you choose the correct SYNC version for your system.

Access the System Settings

- Go to: **Settings** → **System** → **Setting Guide** → **Car Model / AC**
- Enter password: **666888**
- Ensure the **Protocol** is set to **Xinbasi**.

Verify that the **Car Model** is selected correctly.

To apply the correct mode, **double-click** on the car model listed on the far left side of the menu.

- Ver. 1: S2 Auto Touch the origin
- Ver. 2: S2 Auto Touch origin
- The system will automatically restart to apply the changes.



[SYNC 2 ONLY – Fixing Touch Screen Issues on Original SYNC 2 Menu]

If your Tesla-style screen is functioning properly but the touch response on the original **SYNC 2 interface** is reversed or misaligned, you can follow the steps below to recalibrate it.

The SYNC 2 system can be accessed by tapping the “**Console**” icon on the screen.

Step 1: Tap “**Console**” to activate the original SYNC 2 screen.

Step 2: Using **one finger**, press and hold anywhere on the SYNC 2 screen for approximately **15 seconds**. The screen will turn **black and restart automatically**.

Once the screen turns back on, the touch alignment should return to normal.

[SYNC 2 – Audio Connection Tutorial]

Note:

- **For SYNC 2, the system requires both the original SYNC APIM module and original CD Player to be installed and working together with the new system. The APIM must be transferred to the new unit correctly, otherwise the system will not function properly.**
- **The audio from the new system is routed through the vehicle's ORIGINAL USB channel. Original Radio must be remain connected inside. In some cases, you may need to connect an external USB flash drive to the "ORIGINAL" USB port to activate the factory USB audio source. First, copy at least one MP3 music file onto a USB drive, then insert the USB flash drive into the vehicle's original factory USB port (not the USB from the new screen). On the new screen, tap "Console" to open the original SYNC system, then go to Media → USB and play the MP3 file. Once the music starts playing, press the Home icon to return to the Android screen and open the "HD MOVIE" app. If the USB music stops at this point, it means the audio channel has successfully switched to the Android system.**

SYNC 2 Audio Connection Procedure:

Method 1:

1. Disconnect Original Bluetooth and USB: Please disconnect, unpair, and remove the original Bluetooth connection from both your phone and the original SYNC system. Also, make sure your phone is not connected to the original radio via USB.

2. Check the Connector: Please make sure Both audio connectors are connected properly behind the unit.

3. Sync Module: Please make sure the original sync module has been transferred properly


4. Original Radio: Please make sure the original radio unit remains inside.

5. SYNC Menu: Go to the console and check if the sync menu displays correctly.

6. Speakers (Important): Go to **Console > FM/AM Radio** and check if the **original radio** is playing on all speakers.

7. The new system audio uses the original USB channel; a USB drive may be required in the original USB port to activate it.

- **Prepare USB:** Copy at least **one MP3 file** to a USB drive.
- **Plug USB:** Insert it into the **original factory USB port** (not the new screen USB).
- **Open SYNC:** Tap **"Console"** on the new screen.

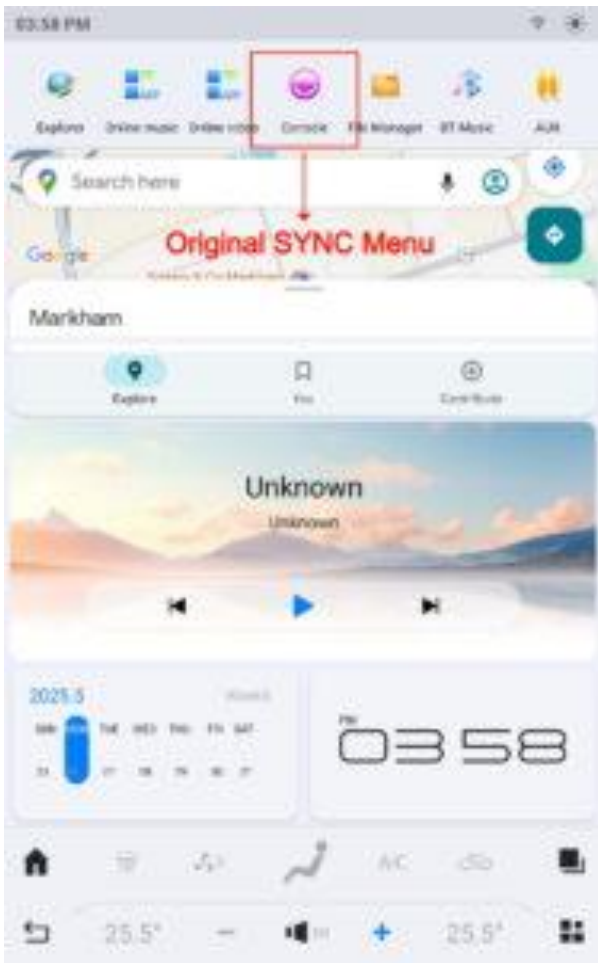

- **Play Music:** Go to **Media** → **USB** and **play** the MP3 file.
- **Return Home:** Press the **Home icon** to go back to Android.
- **Open App:** Tap “**HD MOVIE**”.



If the USB music stops, the audio channel has switched to the Android system successfully.

SYNC 2 Audio Connection Video Tutorial:



Trouble Shooting:

Original CD Player / Radio need to be stayed inside for SYNC 2 vehicles. SYNC Module / APIM also need to be transferred to the back of the new system. New system needs to work together with the original radio and original SYNC module.

1. Ensure the **original CD player remains connected** inside the vehicle.
2. Make sure the **original SYNC 2 system displays properly in Console mode.**
3. Confirm your phone is **not connected to the original radio via Bluetooth or USB.**
4. Ensure a **USB flash drive with a music file** is connected to the **original USB port.**
5. Verify that **both audio connectors behind the unit are properly connected.**

Method 2:

Note: If you experience audio issues after installation, please perform a factory reset first. Then, refer to the video below for the next steps. Please also ensure that the original CD player/radio unit remains connected inside the vehicle, as it also functions as the audio signal processor.

Reset Procedure:


1. Go to Setting – System
2. Scroll down the menu and select “Factory Reset”
3. ERASE ALL DATA

After a factory reset, if the CarAuto application (CarPlay/Android Auto) asks for activation, please follow these steps:

1. Connect to Wi-Fi and ensure the internet is working properly.
2. Verify that the time zone and system time are correctly set for your location.
3. Open the Chrome browser and try to play a video on YouTube to confirm that the internet connection is working properly.
4. Close the CarAuto app completely.
5. Reopen the CarAuto app.

The Apple CarPlay / Android Auto should activate automatically as long as the internet connection is active.

- First, **disconnect, unpair, and delete the original Bluetooth connection** from both your phone and the vehicle’s original system.
- Check that the **small white audio connector behind the new unit is properly plugged in.**
- Confirm that the **original SYNC module has been transferred correctly and installed in the proper orientation.**
- Make sure the **original radio unit is still installed in the vehicle.**
- Tap **Console** on the new screen and verify that the **original SYNC menu appears normally.**

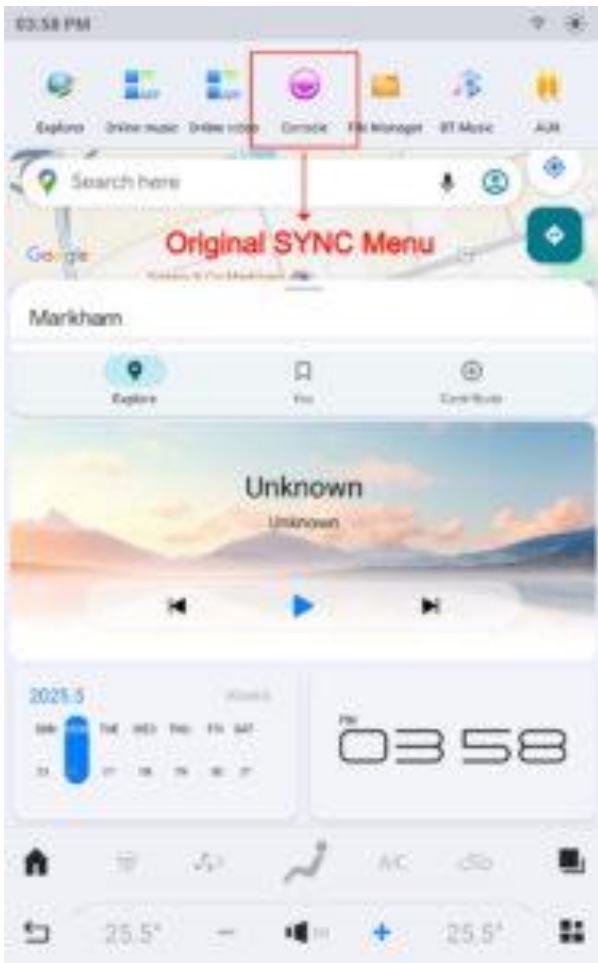

- Go to **Console** → **Radio**, then play original **FM or AM radio** and confirm that **sound is coming from all speakers**.
- Once the radio is playing, **do not exit the radio**. Simply press the **Home icon in the bottom-left corner** to return to the Android home screen while keeping the radio running in the background.
- On the Android system, open the **“HD Movies” (Video Media) app** to switch the audio channel.



- Finally, open **CarPlay** and play music to confirm that the **audio from the new system is working properly**.

Audio Connection Video Tutorial – Method 2:



Check Wiring Harness

Note: Please carefully inspect the wiring harness before installation and ensure that there is no damage or any loose pins.



Please check the connectors are connected the same way as the pictures shown above



This red audio decoder must be connected properly to the main harness



This small speaker is not required to be connected for most vehicle models. If you experience any issues with Bluetooth phone calls, please disconnect it and try again.

[Audio Amplifier Setting]

After the installation, if your speakers are not fully functional. You can follow the steps below:

Step 1: Go to Settings – System – Setting Guide

Step 2: Turn on “Factory AMP”

Step 3: Select “Save & Reboot”




[Reverse Camera & Original Screen Issues]

If the original camera is not showing on the screen while the original SYNC is showing on the “Console” Please check the settings below for Reverse Camera Settings.

Note: Since the original camera is from the original SYNC, please make sure the original SYNC menu shows on the new system first. It’s under “Console” from the navigation panel on the top of the screen.

1. Go to Settings – Factory Setting (Password: 7890)
2. Reversing Format:
 1. Select (**VGA**) for SYNC 2 vehicles

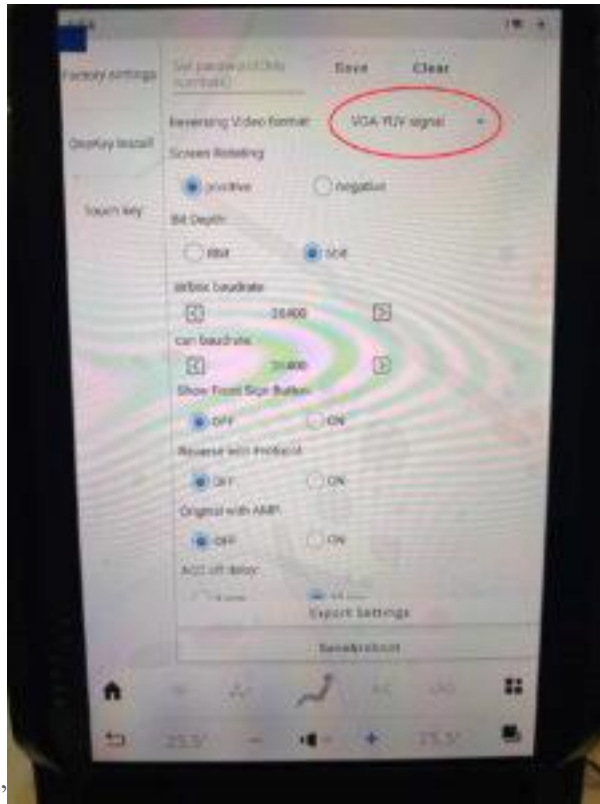

3. Click “Save and Reboot”

(SYNC 2)

- Please make sure the original SYNC module / APIM module is connected properly.



- Since the camera signal goes through the original SYNC System, please check if the original SYNC menu shows on the screen properly. You can enter the SYNC menu by clicking on “Console” from the top of the menu bar. The backup camera signal is from the original SYNC system, in order to check the camera signal, first need to make sure the original SYNC menu shows on the screen. Also, please make sure you have transferred the original APIM / SYNC module to the new screen. In order to reset the APIM, you can also try to unplug the SYNC computer and connect it again.
- If the original SYNC menu does not show up on the new screen properly, please check the protocol settings and make sure it is correct.

You can go to Settings – Systems – Car Model/AC Model (Password: 666888) to confirm if you have the correct settings according to your original vehicle.

- If the original SYNC menu shows up properly under the “Console” menu, then you can check another reversing setting:
- Go to Setting – System – Factory Setting (Password: 7890) – Reversing Format. Please make sure it’s set to “VGA” for “**SYNC 2**”.
- Save and Reboot

[Aftermarket Camera Installation Instruction (Front Camera / Reverse Camera)]

If you are trying to install an aftermarket Front Camera or Reverse Camera, please feel free to take a look here: [HERE](#)

[Bakup Camera / Reverse Guideline]

You can turn ON/OFF the reverse guideline from the system by following the steps below:

Setting – System – Setting Guide – Dynamic Guideline

[BakupCamera / Reverse Mirrored Image]

If you have mirrored image when reverse (Left side become Right side / Right side become Left side), you can follow the steps below:

1. Change the gear to reverse and bring up the reverse screen first
2. Click on the Reverse setting menu on the bottom left corner
3. Adjust the settings of the option “Mirror”

[Reset Procedure]

Hardware Reset:

If the screen remains blank or black when you start the vehicle, please use a small pin (such as a SIM card tray ejector pin) to press the reset button.

Important: Do not use a paper clip or anything larger than the ejector pin, as it may crack the screen.

The reset button is usually located at the front of the unit and is labeled “**RST**” beside it. Once pressed, the system will restart.

Note: This will not erase the softwares that you installed on the unit recently, also, it will not change the settings back to factory default state.

Software Factory Reset:

If you want to reset the software and settings of the system back to factory state, you can follow the steps below:

1. Go to Setting – System
2. Scroll down the menu and select “Factory Reset”
3. Erase All Data

After a factory reset, if the CarAuto application (CarPlay/Android Auto) asks for activation, please follow these steps:

1. Connect to Wi-Fi and ensure the internet is working properly.
2. Verify that the time zone and system time are correctly set for your location.
3. Open the Chrome browser and try to play a video on YouTube to confirm that the internet connection is working properly.
4. Close the CarAuto app completely.
5. Reopen the CarAuto app.

The Apple CarPlay / Android Auto should activate automatically as long as the internet connection is active.

Note: This will erase the software that you installed on the unit recently, it will also reset the unit back to factory condition. If the reverse camera is not working after the reset, you can follow the steps below:

1. Go to settings – Systems – Factory Setting (Password: 7890) – Reversing Format – Select “VGA”

[System Setup Tutorial]

If you have any question about how to setup or use the system after the installation, please refer to the video below:



[SYNC 2 ONLY – Software Setup Tutorial]

How to setup the software for Ford vehicles with SYNC 2 system:



[Screen Calibration]

If the screen has some touch issue, you can re-calibrate the screen by following the steps below:


1. Hold FIVE fingers anywhere on the screen for around 10 seconds.
2. Follow the instruction on the screen
3. Click Save

[WiFi Connectivity]

In order to connect to WiFi, first you will need to make sure you are not using wireless Apple CarPlay or Android Auto at the same time. If you have connected to wireless Apple CarPlay, please turn it off from the cellphone first. For more details, please refer to the section below [Apple CarPlay].

1. Pull down the menu from the top edge of screen, hold the WiFi icon to open the WiFi connection menu.
2. Connect the WiFi to the hotspot of the cellphone.
3. Go to Setting – System – Android – Time Setting
4. Turn ON Network Time
5. Turn OFF auto time zone and manually adjust the time zone according to your area
6. Make sure the time on the upper left corner of the screen matches with your area's local time.
7. Once the time matches with the local time, WiFi should work.
8. To check whether the internet connection is working, you can simply open YouTube in the internet browser. If it loads, the connection is successful.

Secondly, you can go to Setting from the main Android interface, select Time and manually change the date and time under this menu.

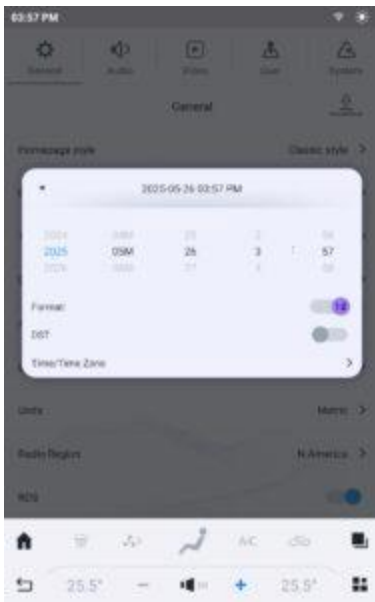

[4G LTE]

After inserting the SIM card, please use a small pin (such as a SIM card tray ejector tool) to gently press the RESET button. The reset button is usually located at the front of the unit and labeled as “**RST**”. Once pressed, the system will restart and recognize the SIM card automatically.

Important: Do not use a paper clip or anything larger than the ejector pin, as it may crack the screen.

For better compatibility, we recommend using a data-only medium (micro) size SIM card, as cellular voice plans are not supported, only data plans will work. You may also need to configure the APN (Access Point Name) settings depending on your network provider. We have tested the unit with AT&T, Mint Mobile and T-Mobile, and both work well. Please also ensure that the 4G LTE antenna is positioned in a location with strong signal reception. If you experience weak signal or connection issues, try relocating the antenna to another spot with better coverage.

For Mint Mobile: All you need to do is to insert the SIM card with the unit power off and then power the unit back on and after a few seconds it recognizes the SIM card. Mint Mobile will ask you to download their app online whether you use your smartphone or your laptop and so you can activate the card online.

IMEI Number:


To locate the IMEI number, please follow these steps:

Go to Settings > Android Settings > Mobile Network, and you will find the IMEI number listed there.

In order to access the internet, please make sure the system time is synchronized with your local time.

1. Go to Setting – System – Android – Time Setting
2. Turn ON Network Time
3. Turn OFF auto time zone and manually adjust the time zone according to your area
4. Make sure the time on the upper left corner of the screen matches with your area’s local time.
5. Once the time matches with the local time, WiFi should work.
6. To check whether the internet connection is working, you can simply open YouTube in the internet browser. If it loads, the connection is successful.


Secondly, you can go to Setting from the main Android interface, select Time and manually change the date and time under this menu.

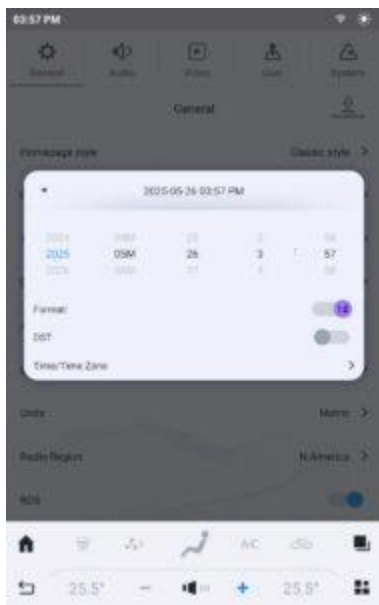

[Bluetooth]

If you are not able to pair the bluetooth with the screen. Please follow the steps below:

- Go to the Bluetooth menu of your cellphone, search for previous pairing record. Unpair and Delete it.
- Go to the Bluetooth menu of the new system. Click on the Connection icon on the Bluetooth menu.
- Turn off the Bluetooth of the cellphone and turn it back on again.
- Search the Bluetooth name of the new system again on the phone.

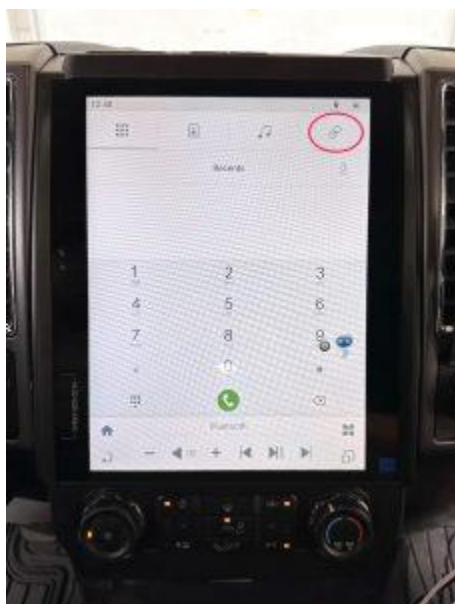

[Google App]

After the installation, if you can't use the Google App. Please make sure you have connected to a functioning network and follow the steps below:

1. Connect to the WiFi hotspot of the cellphone
2. Open the internet browser and confirm the internet is working.
3. Make sure the time zone is synchronized to your area.
4. Go to Setting – System – Factory Setting (Password: 7890)
5. Look up a setting “Google App”. Make sure it's turned on
6. Click “Save & Reboot”



[Weather]

How to change the Weather Location on the main interface:




[Offline Navigation]

Using Google Maps for Offline Navigation. To use navigation without an internet connection, follow these steps:

1. Connect to WiFi – Ensure the device is connected to a stable WiFi network.
2. Update Google Maps – Open the Google Play Store, search for Google Maps, and update it to the latest version.
3. Download Offline Maps
4. Open the Google Maps app.
5. Tap your profile icon in the top right corner.
6. Select Offline maps > Select your own map.
7. Zoom and position the area you want to download.
8. Tap Download.

Once the map is downloaded, you'll be able to use navigation and search for locations in that area without an internet connection.

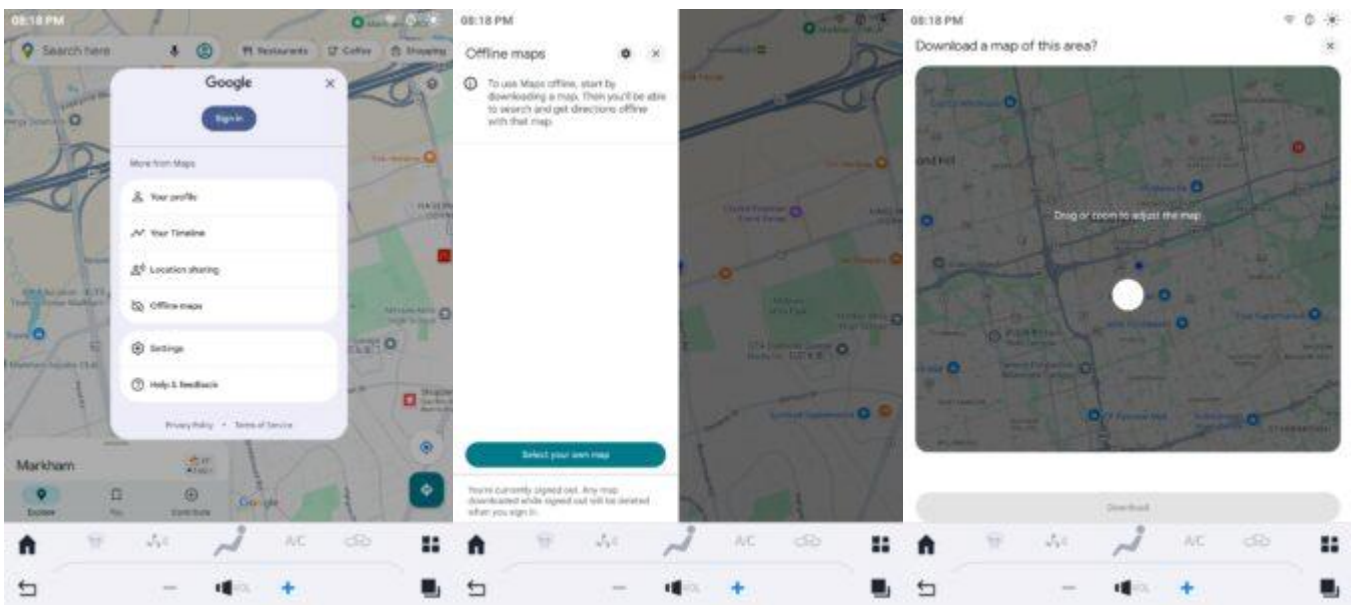

[Apple CarPlay / Android Auto Activation]

If the system asks for activation after a software reset, please follow these steps:

1. Connect to Wi-Fi and ensure the internet is working properly.
2. Verify that the **time zone** and **system time** are correctly set for your location.
3. Open the **Chrome browser** and try to play a video on **YouTube** to confirm that the **internet connection is working properly**.
4. Close the **CarAuto** app completely.

5. Reopen the **CarAuto** app.

The system should activate automatically as long as the internet connection is active.

[Apple CarPlay]

How to switch between Apple CarPlay and WiFi Hotspot:



How to connect / reset wireless Apple CarPlay:

Note: If you have any difficulties on connecting the CarPlay on the new system, please make sure you have **DISCONNECTED** the cellphone from the original Bluetooth first. You can go to the Bluetooth menu of the cellphone to confirm it. If you see any connections with the original system, please disconnect and unpair it before try to connect the CarPlay from the New Android Screen.

Wireless Apple CarPlay only use Bluetooth to pair at the beginning, once it got paired, it will automatically switch to the WiFi channel at the background. While using Wireless Apple CarPlay, you can not turn on WiFi hotspot at the same time. If you would like to turn on the WiFi Hotspot to use some of the applications (such as YouTube..etc), you will need to turn off the CarPlay first. The procedure to turn off the CarPlay shows as below:



CarPlay Reset Procedure:

Important Notes Before Pairing:

- **Disconnect the Original Bluetooth:** Ensure your phone is **disconnected and unpaired** from the vehicle's **original Bluetooth system**. Your phone can only connect to **one Bluetooth system** at a time.
- **Avoid USB Connection to the Original System:** Do **not connect your phone via USB** to the original car system, as it may cause conflicts.
- **Charging Recommendation:** If you need to charge your phone, use a **12V cigarette lighter charger** instead of the USB port. It provides faster charging (12V vs. 5V).
- **Wi-Fi Hotspot Limitation:** Wireless Apple CarPlay or Android Auto cannot be used while your phone's Wi-Fi hotspot is active.

How to Reset & Reconnect CarPlay/Android Auto

Part 1: Clear Previous Connection Data from iPhone

1. Erase CarPlay Settings (iPhone only):

- Go to (Phone): Settings > General > CarPlay
- Delete all previously connected vehicles.

2. Remove Bluetooth Pairing:

- Go to your phone's Bluetooth settings.
- Locate the Tesla screen's Bluetooth name.
- Select “Forget” or “Unpair”.

3. Restart Your Phone.

Part 2: Clear Previous Connections on Tesla Screen

1. Open the Bluetooth menu on the Tesla screen.
 2. Tap the **connection icon** (upper-right corner).
 3. **Delete all previously paired phones** from the list.
 4. **Restart the Tesla unit:**
- Use a pin to press the “RST” reset button, usually located at the front of the unit.

How to Connect Wireless Apple CarPlay:

1. On the Tesla Screen:

- Go to the Bluetooth menu.
- Tap the **connection icon**.

2. On Your Phone:

- Go to Bluetooth settings.
- Pair your phone with the new Tesla system.

Note: CarPlay uses Bluetooth only for initial pairing. After pairing, it switches to Wi-Fi automatically in the background. It's normal for Bluetooth to show “Disconnected”—do not reconnect it manually.

3. Once paired, the screen should automatically launch **CarAuto** (CarPlay/Android Auto). If it doesn't, open the **CarAuto** app manually from the app list.

4. On your iPhone, **accept the prompt** to authorize CarPlay connection.

Once setup is complete, you're ready to enjoy Wireless CarPlay/Android Auto!

Guidelines for Using CarPlay/Android Auto:

Connection Requirements

- **Wireless CarPlay/Android Auto uses your phone's WiFi channel** to operate.
- While connected, your phone's WiFi is occupied by CarPlay/Android Auto.
- **Do not manually connect your phone's WiFi hotspot to the Tesla system** while CarPlay/Android Auto is active — this may cause conflicts or connectivity issues.

Automatic Switching Behavior

- After pairing is complete, the system will **automatically switch from Bluetooth to WiFi** to run CarPlay/Android Auto.
- Once connected via WiFi, **Bluetooth will show as “Disconnected”** — this is normal.
- **Do not manually reconnect Bluetooth** after CarPlay/Android Auto is running.

How to Disconnect CarPlay and Use WiFi Hotspot Instead

If you prefer to use your phone's WiFi hotspot for internet on the system rather than CarPlay/Android Auto, follow these steps:

Step 1: Disable CarPlay on iPhone

- Go to: Settings > General > CarPlay
- Find the Tesla system and **turn off CarPlay** (do not delete the connection).

Step 2: Enable Phone's WiFi Hotspot

- Turn on the **WiFi hotspot** feature on your phone.

Step 3: Connect the System to Hotspot

- On the Tesla system, open **WiFi settings**.
- Connect to your phone's hotspot.
- The system may automatically open the **CarAuto app** and disable WiFi again.

If this happens:

- **Close the CarAuto app.**
- **Manually re-enable WiFi** on the Tesla system.

Note: The system will automatically try to launch CarPlay/Android Auto anytime your phone connects via Bluetooth.

To Keep the System in Hotspot Mode

- Open the **CarAuto app settings** on the Tesla screen.
- **Disable the “Auto Connect” option** to prevent automatic switching back to CarPlay/Android Auto.

[Android Auto]

How to connect / reset wireless Android Auto:



How to Prevent CarPlay from Auto-Launching:

To keep the Tesla system connected to your phone's WiFi hotspot instead of automatically launching CarPlay/Android Auto:

1. **Disconnect your phone from the Tesla system** (turn off Bluetooth or forget the connection temporarily).
2. On the Tesla screen, **open the CarAuto app**.
3. Tap the **Settings icon** located at the bottom-right corner.
4. In the Settings menu, **disable the "Auto Connect" option**.

Result: CarPlay/Android Auto will no longer launch automatically when your phone connects. This allows the system to remain in WiFi Hotspot mode for internet access.

How to use original microphone and wifi hotspot on the new system at the same time:

1. Use the Original Microphone:

- To use your vehicle's **original microphone**, please **pair your phone only with the factory (original) Bluetooth**.
- **Do not pair your phone with the new Tesla-style system** at the same time.
- This setup ensures that your phone calls will continue to use the **factory-installed microphone** for better voice quality.

2. Share Wi-Fi Hotspot with the New System:

- You can **enable the Wi-Fi hotspot on your phone** and connect the new Tesla system to it.
- This allows the new system to **access the internet** for media streaming apps like **YouTube, Netflix**, and others.
- **Bluetooth and Wi-Fi can function independently**, so while Bluetooth is connected to the original system, Wi-Fi can still be shared with the new one.

Note:

- Please note that connecting your phone this way means that you can not use wireless Apple CarPlay / Android Auto on the new system.
- Instead, you will be able to use the original microphone for phone calls while sharing your phone's internet with the new Tesla-style system for media streaming.
- This is because your phone's Bluetooth must remain connected to the original radio for the microphone to function, and **wireless CarPlay requires a Bluetooth connection to the new system**.

- If wireless CarPlay is important to you, you would need to pair your phone with the new system instead, which would disable use of the original microphone.

[How to Install Aftermarket REVERSE Camera:]

In order to install the backup camera to the system, basically you only need to run the cable from the tailgate to the front unit underneath the vehicle. (Caution: At the back end of the camera wire, there are two wires RED and BLACK, please cut it and tape it. Please make sure both red wire and black wire do not touch each other and cause short circuit. Otherwise, it will burn the camera). Please test the whole camera system and all the wire first before run the wire underneath the truck. Make sure the camera is working before run any camera wire.

The new system provides camera power through the wire labeled “CCD-12,” and the camera signal should be connected to the RCA connector labeled “CCD-V.” You only need to connect the CCD-12 power wire from the screen to the camera (typically the red power wire on the camera side). There is no need to connect any power from the reverse light at the rear of the vehicle. Instead, you should cut and properly tape off the “RED” and “BLACK” wires at the back end of the camera cable, ensuring they do not come into contact with each other, as any exposed metal could cause a short circuit and potentially damage the camera. Additionally, please go to the reverse settings and change the reversing format to “CVBS.” For more detailed instructions, you may continue reading below.

For the wiring instruction, you can also take a look of the video instruction below for a reference.

Below is a video tutorial to show you an introduction of the wiring harness. It may not be exactly the same as your model but it will be similar to all the models.:



Software Settings:

If you are installing the **aftermarket camera**, you will also need to go to Settings – System – Factory Setting (7890 / 666888) – Reversing Format – Change it to “**CVBS**“, then click “Save and Reboot”.

If it’s the **OEM camera**, you will also need to go to Settings – System – Factory Setting (7890 / 666888) – Reversing Format – Change it to “**VGA**“, then click “Save and Reboot”.

Trouble Shooting:

1) Please prepare a voltage tester. Make sure the wire CCD-12 provide 12V power.

2) Please make sure the RED wire at the back end of the camera wire (The end that connect to the reverse camera, it comes with RED and BLACK wire.) Since the system provides 12V power from the front to the camera , there should also be 12V power on the RED wire of the camera side.

3) Please make sure the Reversing Camera setting is set to “CVBS”.

4) Please make sure the camera wire is not damage.

[How to Install Aftermarket REVERSE Camera:]

In order to install the backup camera to the system, basically you only need to run the cable from the tailgate to the front unit underneath the vehicle. (Caution: At the back end of the camera wire, there are two wires RED and BLACK, please cut it and tape it. Please make sure both red wire and black wire do not touch each other and cause short circuit. Otherwise, it will burn the camera). Please test the whole camera system and all the wire first before run the wire underneath the truck. Make sure the camera is working before run any camera wire.

The new system provide the camera power, the camera power wire is labelled as “CCD-12”. You just need to connect this camera power from the screen (CCD-12) to the camera power wire of the camera (Red wire which attached to the YELLOW RCA connector). You do not need to connect to any power from the reverse light at the back end of the camera cable. You will just need to cut and tape the “RED” and “BLACK” wires at the back end of the camera cable. Make sure there is no contact each other between the “RED” and” “BLACK” wires, otherwise, the metal part from the wires will cause short circuit and it will burn the camera.

For the wiring instruction, you can also take a look of the video instruction below for a reference.

Below is a video tutorial to show you an introduction of the wiring harness. It may not be exactly the same as your model but it will be similar to all the models.:



Software Settings:

If you are installing the **aftermarket camera**, you will also need to go to Settings – System – Factory Setting (7890 / 666888) – Reversing Format – Change it to “**CVBS**“, then click “Save and Reboot”.

If it’s the **OEM camera**, you will also need to go to Settings – System – Factory Setting (7890 / 666888) – Reversing Format – Change it to “**VGA**“, then click “Save and Reboot”.

Trouble Shooting:

1) Please prepare a voltage tester. Make sure the wire CCD-12 provide 12V power.

2) Please make sure the RED wire at the back end of the camera wire (The end that connect to the reverse camera, it comes with RED and BLACK wire.) Since the system provides 12V power from the front to the camera , there should also be 12V power on the RED wire of the camera side.

3) Please make sure the Reversing Camera setting is set to “CVBS”.

4) Please make sure the camera wire is not damage.

[How to Install Aftermarket FRONT Camera:]


In order to install the front camera, currently we do not have instruction for it.

1) You can simply run the wire from the front to the screen, the camera signal can be connected to AUX-V, and

2) In order to provide the power to the camera, you can get the power from any of the accessory wire (+12V) in the vehicle. Please don't get the power directly from the unit, you can get the power from the fuse box of the vehicle.

3) In order to activate the front camera, you can click on the icon (AUX) from the app list.

Note: The power out put from the unit (CCD-12 / CCD-6) are only for the reverse camera power. The power can only be activated when the car is in reverse, therefore it can't be used for the front camera.

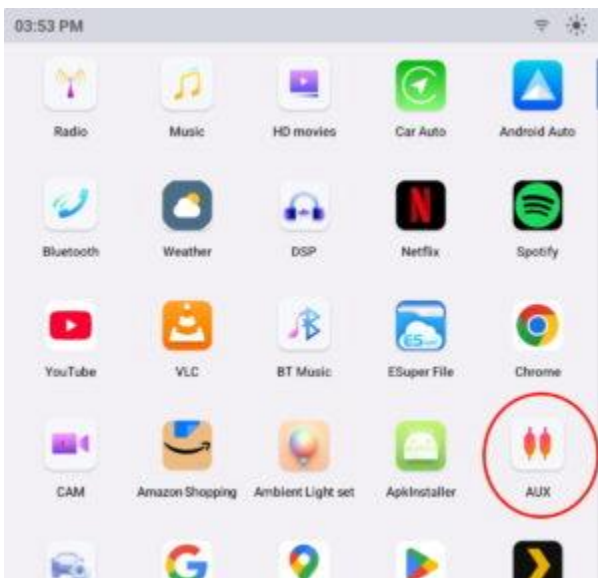

Camera Image & Parking Guideline Settings

Note: In order to switch the left and right mirror image of the camera, you can connect both “WHITE” and “GREEN” wire at the back end of the camera. The white one control the guidance line and the green one control the mirror image of the camera.

At the back of the front camera, you will find two small control wires: WHITE and GREEN. These wires are used to adjust the camera display settings.

WHITE wire – Parking Guidance Lines

This wire controls the on-screen parking guidelines (the colored lines that help estimate distance when parking). Before connecting or disconnecting these wires, please **disconnect the power from the camera first**. After adjusting the wires as needed, you can **reconnect the power to the camera** to apply the change.

Connected (Disable Guideline) → Parking guideline lines will appear on the screen.

Disconnected (Enable Guideline) → Parking guideline lines will be disabled.

GREEN wire – Mirror Image (Left/Right Orientation)

This wire controls whether the camera image is displayed in mirror mode or normal mode. Before connecting or disconnecting these wires, please **disconnect the power from the camera first**. After adjusting the wires as needed, you can **reconnect the power to the camera** to apply the change.

Connected (For Front Camera) → The image will be displayed in mirror mode (left and right are reversed).

Disconnected (For Reverse Camera) → The image will be displayed in normal orientation.

Important:

For a front camera, it is usually recommended to enable the mirror mode so the image displays in the correct orientation.

These wires are located near the camera cable at the back end of the camera, and they can simply be connected together or left disconnected to change the settings.

How to install offline Navigation software and APK files:



How to update MCU / Firmware for the system | Android 13 (If applicable):



How to update System Software for the system | Android 13 (If applicable):



For further technical inquiries, please refer to our technical support page for more details: [HERE](#)