

Owner's Manual, Installation Instruction and Trouble Shooting Guideline:

Applies to the following models:

1. F150 (2015-2021) | SYNC 1
2. F150 (2015-2021) | SYNC 2
3. F150 (2015-2021) | SYNC 3
4. F250, F350, F450 (2017-2021) | SYNC 1
5. F250, F350, F450 (2017-2021) | SYNC 2
6. F250, F350, F450 (2017-2021) | SYNC 3

Before You Begin, Please Read the Following Instructions Carefully

1. Important: Make sure your phone is NOT connected to the original system via USB or Bluetooth. Before proceeding, delete and unpair any existing Bluetooth connections from BOTH the original vehicle system and your phone.

2. For SYNC 2 and SYNC 3 models, the system requires both the original SYNC APIM module and original CD Player to be installed and working together with the new system. The APIM must be transferred to the new unit correctly, otherwise the system will not function properly.

- Please make sure the original SYNC module has been transferred to the new system and is displaying properly in Console mode.
- Please also make sure the original radio module / CD player remains connected inside the vehicle.




SYNC 2 Module



SYNC 3 Module

3. Please ensure that all connectors are securely connected to the correct ports behind the new unit.

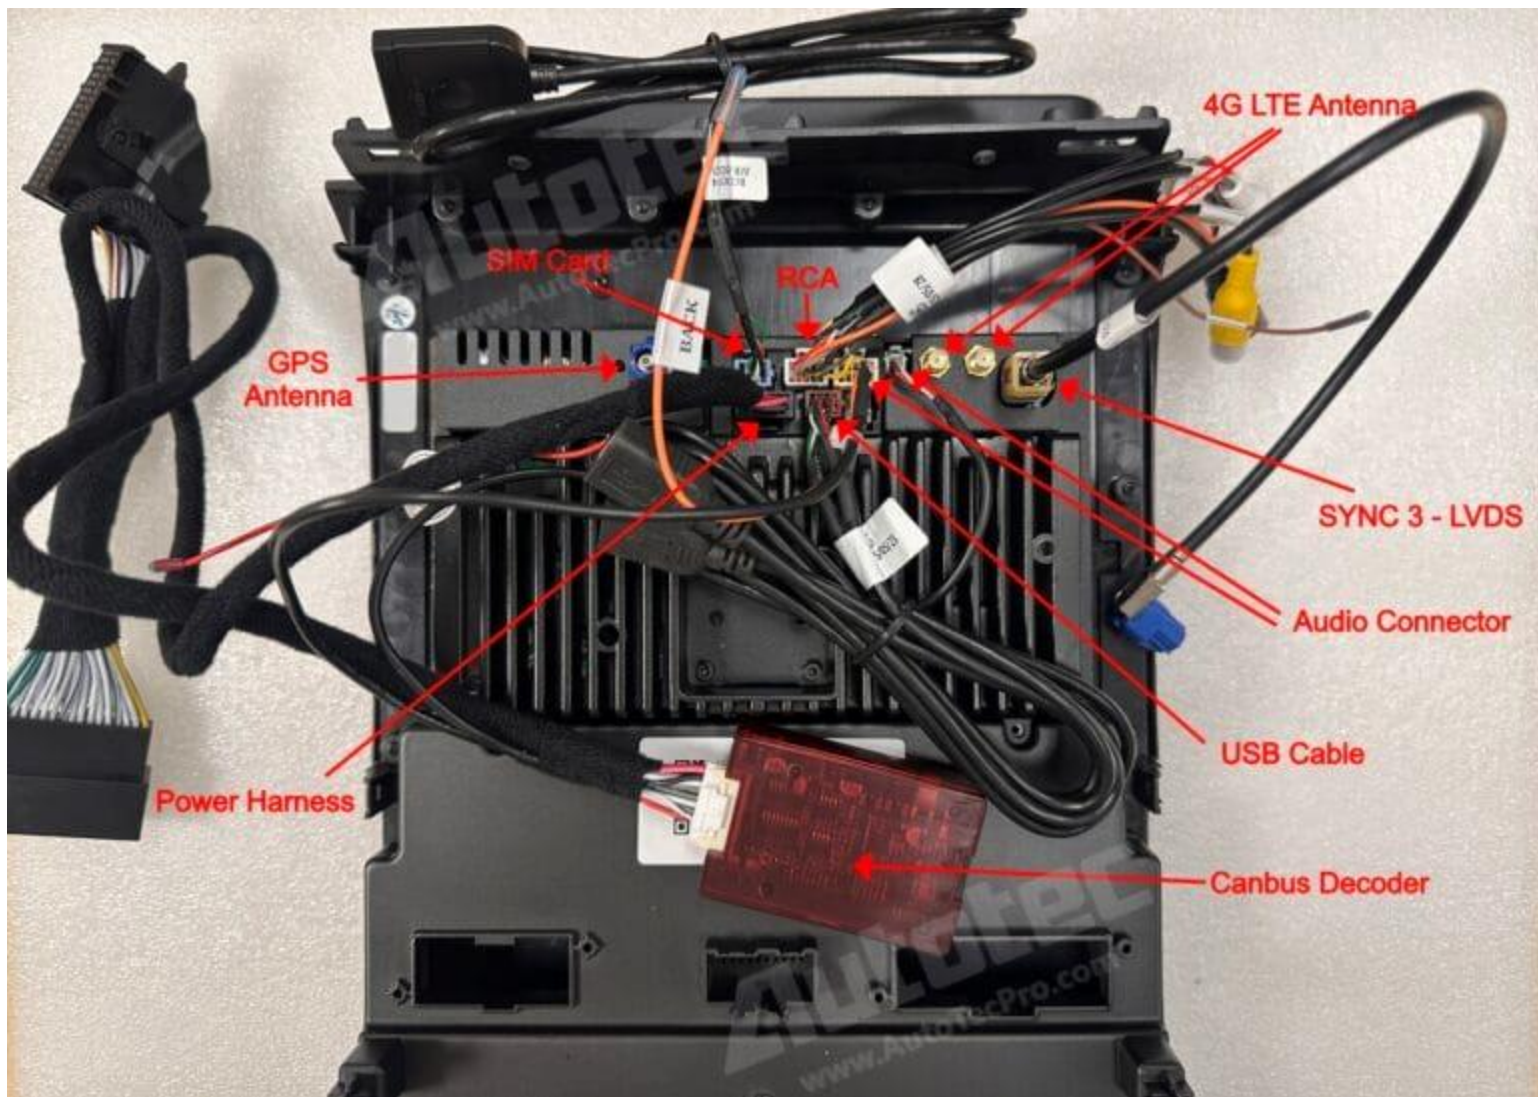


Audio Connectors

Both connectors must be connected properly

Canbus Decoder

Main Power Harness

Original Screen Signal
(SYNC 3 Only)

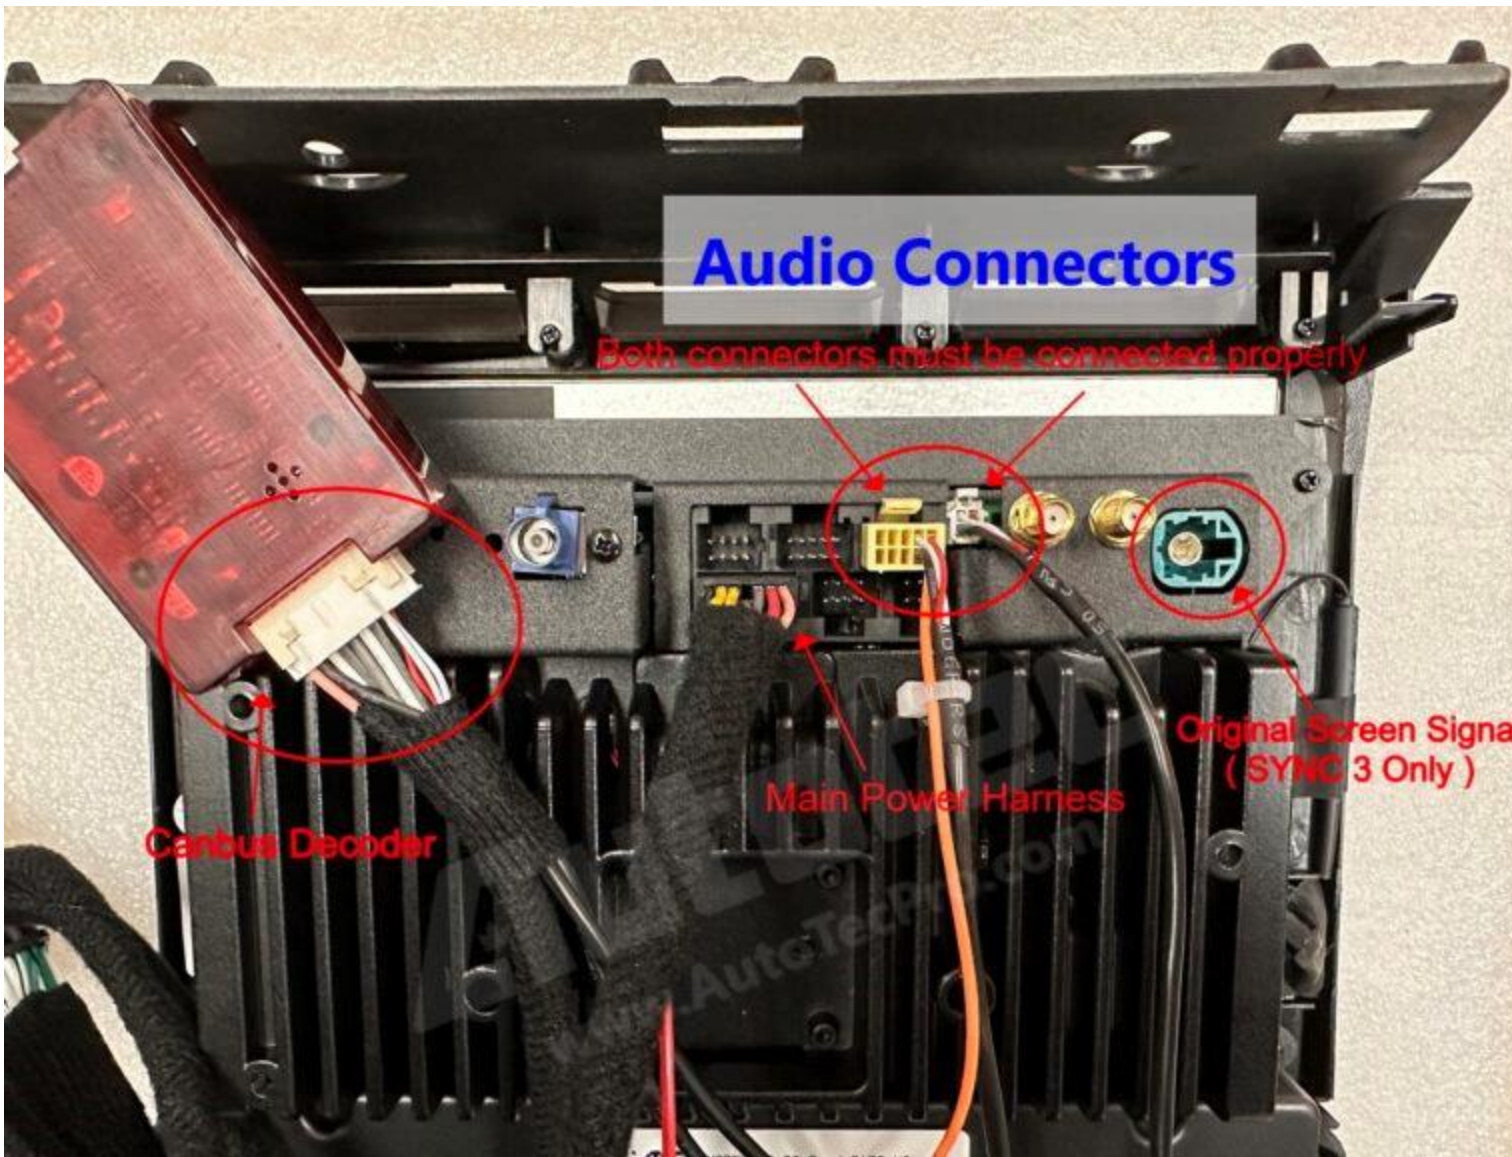

Only two screws are required to secure the APIM module.



Ⓐ



Ⓑ



✗



Note:

1. Screw locations may vary by model.
2. Install the SYNC APIM module in the correct orientation (as shown). Incorrect installation may affect the original navigation.
3. Screw A: included in the package
4. Screw B: from the original climate control board
5. Do NOT use longer screws from the original system, as they may damage the bracket.

4. Important: Car Model / AC Configuration After Installation

After installing the unit, you will need to configure the Car Model / AC menu and GM Screen Parameter settings so the system can properly communicate with the original factory screen and vehicle system.

For more details, please follow the steps below:

Set the correct Vehicle Protocol

1. **On the Android home screen, open Settings.**
2. **Go to Systems → Setting Guide (Enter Password: 666888).**
3. **Tap Car Model / AC Model.**
4. **Make sure Protocol is set to “Xinbasi”**
5. **After tapping Car Model / AC Model, double-click the correct vehicle model on the right side, then wait for the system to reboot automatically.**
6. **Return to the home screen of the new system, then tap Console to display the original factory screen. Check whether the original screen appears and is properly aligned on the new system.**

If the original screen does not appear or is not aligned correctly:

1. **Go back to Car Model / AC setting menu.**
2. **Try another vehicle option from the list.**
3. **Double-click the model to confirm. The system will restart automatically.**

Repeat this process until the original factory screen appears on the console and is aligned correctly.

02:19 PM		
Protocol▼ Import table Restore		
Current: F150 HI Protocol: Xinbasi		
None	Mustang LO	S1 Auto
Ford	Mustang HI	S2 Auto Touch the origin
General Motors	F150 LO	S2 Auto Touch origin
Toyota	F150 HI	S3 Auto
Honda	Explorer HI	S3 4.3 Manual
Nissan	Explorer LO	13-14 Specail S1 Auto
Honda	Explorer LO	13-14 Specail S1 Auto
Nissan	F450	13-14 Specail S2 Auto
Jeep	F450	13-14 Specail S2 Auto

- **SYNC 1 (Stock – 4.3”) | Manual Climate Control → F150 LO – S1 Manual**
- **SYNC 2 (Stock – 8”) | Manual Climate Control → F150 LO – S2 Manual**
- **SYNC 2 (Stock – 8”) | Automatic Climate Control → F150 HI – S2 Auto**
- **SYNC 3 (Stock – 4.3”) | Manual Climate Control → F150 LO – S3 4.3 Manual**
- **SYNC 3 (Stock – 8”) | Manual Climate Control → F150 LO – S3 Manual**
- **SYNC 3 (Stock – 8”) | Automatic Climate Control → F150 HI – S3 Auto**

Note: For Manual Climate Control, you will need to use the original physical climate control knobs to control the temperature instead of using the touch screen. Unlike Automatic Climate, there is no data provided from the original system. In order to get rid of the climate control panel and change the interface to Manual Climate Control, please follow the steps below:

1. **Go to Setting – System – Factory Setting (Password: 7890)**
2. **Look up the option “AC Reserve”**
3. **Turn it “ON”**
4. **Click “Save and Reboot”**

5. Audio Connection

The system does not have a built-in amplifier, and the audio is transmitted through the original USB channel. Please refer to the Audio Tutorial section below for detailed instructions.

For SYNC 3 Models (Stock 4.3" and 8"):

Note: If you experience audio issues after installation, please perform a factory reset first. Then, refer to the video below for the next steps. Please also ensure that the original CD player/radio unit remains connected inside the vehicle, as it also functions as the audio signal processor.

Reset Procedure:

1. Go to Setting – System
2. Scroll down the menu and select “Factory Reset”
3. ERASE ALL DATA


After a factory reset, if the CarAuto application (CarPlay/Android Auto) asks for activation, please follow these steps:

1. Connect to Wi-Fi and ensure the internet is working properly.
2. Verify that the time zone and system time are correctly set for your location.
3. Open the Chrome browser and try to play a video on YouTube to confirm that the internet connection is working properly.
4. Close the CarAuto app completely.
5. Reopen the CarAuto app.

The Apple CarPlay / Android Auto should activate automatically as long as the internet connection is active.

SYNC 3 Audio Connection Procedure:

- **First, disconnect, unpair, and delete the original Bluetooth connection** from both your phone and the vehicle’s original system.
- **Check that the small white audio connector behind the new unit is properly plugged in.**
- **Confirm that the original SYNC module has been transferred correctly and installed in the proper orientation.**
- **Make sure the original radio unit is still installed in the vehicle.**
- **Tap Console on the new screen and verify that the original SYNC menu appears normally.**

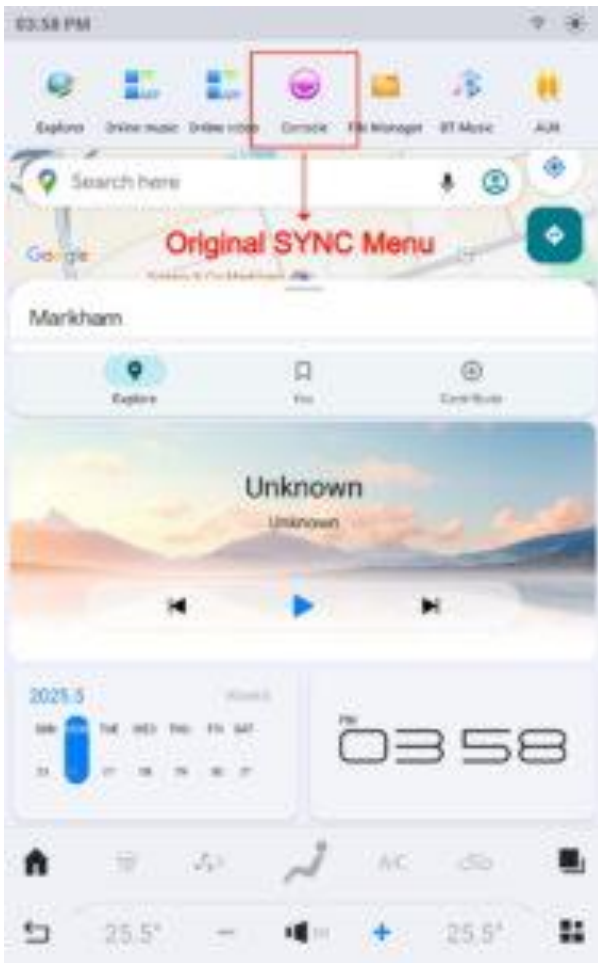

- Go to **Console** → **Radio**, then play original **FM or AM radio** and confirm that **sound is coming from all speakers**.
- Once the radio is playing, **do not exit the radio**. Simply press the **Home icon in the bottom-left corner** to return to the Android home screen while keeping the radio running in the background.
- On the Android system, open the **“HD Movies” (Video Media) app** to switch the audio channel.



- Finally, open **CarPlay** and play music to confirm that the **audio from the new system is working properly**.

SYNC 3 Audio Connection Video Tutorial:



For SYNC 2 Models (Stock 8"):

Note:

- **For SYNC 2, the system requires both the original SYNC APIM module and original CD Player to be installed and working together with the new system. The APIM must be transferred to the new unit correctly, otherwise the system will not function properly.**

- The audio from the new system is routed through the vehicle's ORIGINAL USB channel. Original Radio must be remain connected inside. In some cases, you may need to connect an external USB flash drive to the “ORIGINAL” USB port to activate the factory USB audio source. First, copy at least one MP3 music file onto a USB drive, then insert the USB flash drive into the vehicle's original factory USB port (not the USB from the new screen). On the new screen, tap “Console” to open the original SYNC system, then go to Media → USB and play the MP3 file. Once the music starts playing, press the Home icon to return to the Android screen and open the “HD MOVIE” app. If the USB music stops at this point, it means the audio channel has successfully switched to the Android system.

SYNC 2 Audio Connection Procedure:

- **Prepare USB:** Copy at least **one MP3 file** to a USB drive.
- **Plug USB:** Insert it into the **original factory USB port** (not the new screen USB).
- **Open SYNC:** Tap “Console” on the new screen.



- **Play Music:** Go to **Media → USB** and **play the MP3 file**.
- **Return Home:** Press the **Home icon** to go back to Android.
- **Open App:** Tap “HD MOVIE”.



If the **USB music** stops, the **audio channel** has switched to the **Android system successfully**.

SYNC 2 Audio Connection Video Tutorial:




Trouble Shooting:

Original CD Player / Radio need to be stayed inside for SYNC 2 vehicles. SYNC Module / APIM also need to be transferred to the back of the new system. New system needs to work together with the original radio and original SYNC module.

1. Ensure the **original CD player** remains **connected** inside the vehicle.
2. Make sure the **original SYNC 2 system** displays **properly in Console mode**.
3. Confirm your phone is **not connected to the original radio via Bluetooth or USB**.
4. Ensure a **USB flash drive with a music file** is connected to the **original USB port**.
5. Verify that **both audio connectors** behind the unit are **properly connected**.

Caution (For SYNC 2 & SYNC 3 vehicles):

Wiring Harness: Note: Please carefully inspect the wiring harness before installation and ensure that there is no damage or any loose pins.

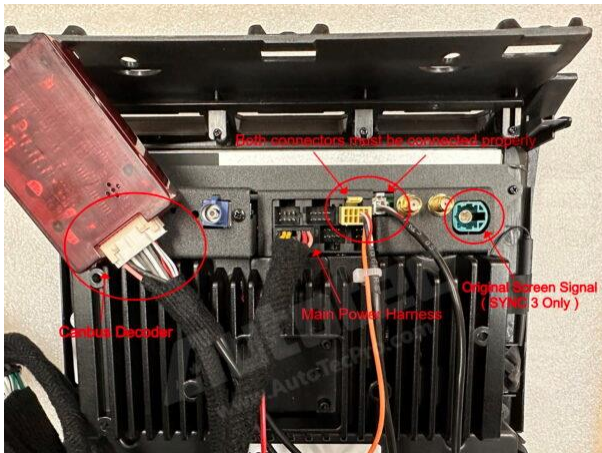

Please check the connectors are connected the same way as the pictures shown above



This red audio decoder must be connected properly to the main harness




This small speaker is NOT required to be connected for most vehicle models. If you experience any issues with Bluetooth phone calls, please disconnect it and try again.

[SYNC 1] – Installation Video Instruction

Note:

The original radio will be removed completely during the installation. Therefore, the main harness will be connected directly to the original harness behind the original radio, it does not require to keep the original radio. However, the Original Climate Control motherboard will be required to transfer to the new system as well. For more details, please refer to video link below.

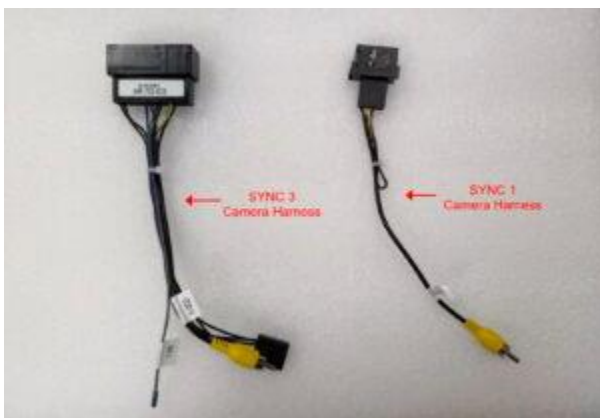

[SYNC 2] – Installation Video Instruction

Note:

Installation Video Instruction (Ford F150 | SYNC 2):

Note: The original CD player/radio must remain installed in the vehicle, as the new system operates in conjunction with the factory radio. Additionally, the original SYNC module (APIM), which is located behind the factory screen, must be transferred and installed behind the new system as well to ensure full functionality.



[SYNC 3] – Installation Video Instruction


Note:

Installation Video Instruction (Ford F150 | SYNC 3):

Note: The original CD player/radio must remain installed in the vehicle, as the new system operates in conjunction with the factory radio. Additionally, the original SYNC module (APIM), which is located behind the factory screen, must be transferred and installed behind the new system as well to ensure full functionality.




[SYNC 1] – Wiring Instruction

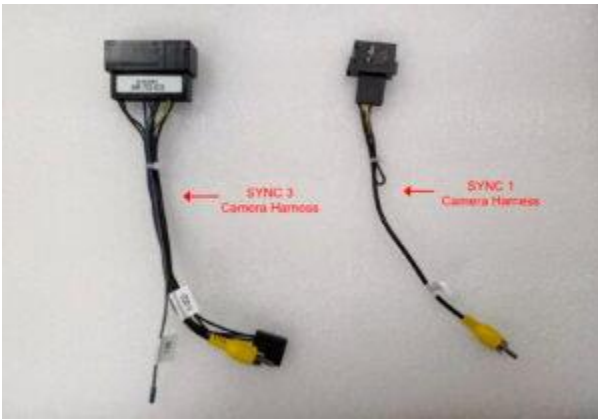

[SYNC 3] – Wiring Instruction

Note: When start the installation, please start from the bottom of the unit first.

1. Cliaamte Control Harness
2. SYNC (APIM) – Micro USB
3. SYNC (APIM) – Main Harness
4. RCA Connector, Reverse Connector, Sim Card and USB Connectors...etc
5. “**Yellow**” Connector **MUST** be on the most **RIGHT** side shown as the photo below.
6. **Last** is the power of the screen.

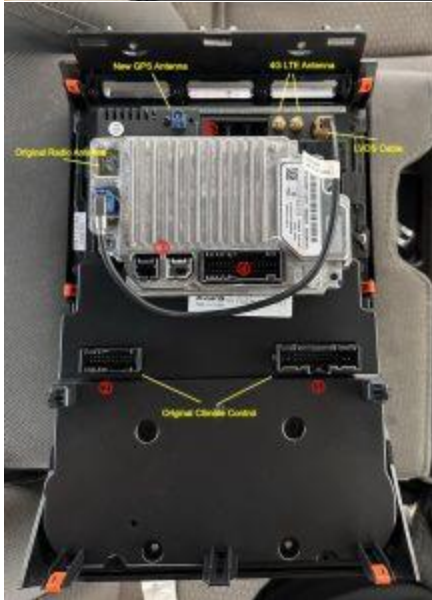

[Car Model / AC Settings]

Protocol Settings:

Note: If your vehicle is an F250, F350, or F450, please select “**F150**” instead, and ensure you choose the correct SYNC version for your system.

Access the System Settings

- Go to: Settings → System → Setting Guide → Car Model / AC
- Enter password: 666888
- Ensure the **Protocol** is set to **Xinbasi**.

Verify that the **Car Model** is selected correctly.

To apply the correct mode, **double-click** on the car model listed on the far left side of the menu.

- The system will automatically restart to apply the changes.

Select the Correct Car Model Based on SYNC Version

- **SYNC 1 (Stock – 4.3") | Manual Climate Control** → *F150 LO – S1 Manual*
- **SYNC 2 (Stock – 8") | Manual Climate Control** → *F150 LO – S2 Manual*
- **SYNC 2 (Stock – 8") | Automatic Climate Control** → *F150 HI – S2 Auto*
- **SYNC 3 (Stock – 4.3") | Manual Climate Control** → *F150 LO – S3 4.3 Manual*
- **SYNC 3 (Stock – 8") | Manual Climate Control** → *F150 LO – S3 Manual*
- **SYNC 3 (Stock – 8") | Automatic Climate Control** → *F150 HI – S3 Auto*



[For Manual Climate Control – SYNC 1, SYNC 2 & SYNC 3]

Note: For Manual Climate Control, you will need to use the original physical climate control knobs to control the temperature instead of using the touch screen. Unlike Automatic Climate, there is no data provided from the original system. In order to get rid of the climate control panel and change the interface to Manual Climate Control, please follow the steps below:

1. Go to Setting – System – Factory Setting (Password: 7890)
2. Look up the option “AC Reserve”
3. Turn it “ON”
4. Click “Save and Reboot”

Max AC Issues (Only applied to Manual AC vehicle):

Note: If the **MAX A/C** setting does not engage on vehicles with **manual climate control**, the issue is usually mechanical:

1. Remove the original climate-control panel.
2. Inspect the **gear behind the A/C knob**—this gear actuates the MAX A/C position.
3. Ensure the gear is correctly seated and turns freely; re-align or replace if necessary.

Because this is the manual A/C version, the new head unit **does not control** the vehicle’s original climate system—the knob’s internal gear remains responsible for MAX A/C.

[SYNC 2 & SYNC 3 – Heated & Cooled Steering Wheel Control]

In order to control the Heated & Cooled Steering Wheel, you can click on “Console” from the top of the menu bar to enter the original SYNC menu. Since the system retains the original SYNC, you can control the Heated & Cooled Steering Wheel under the original SYNC menu.

[SYNC 2 – Audio Connection Tutorial]

Note:

- **For SYNC 2, the system requires both the original SYNC APIM module and original CD Player to be installed and working together with the new system. The APIM must be transferred to the new unit correctly, otherwise the system will not function properly.**
- **The audio from the new system is routed through the vehicle’s ORIGINAL USB channel. Original Radio must be remain connected inside. In some cases, you may need to connect an external USB flash drive to the “ORIGINAL” USB port to activate the factory USB audio source. First, copy at least one MP3 music file onto a USB drive, then insert the USB flash drive into the vehicle’s original factory USB port (not the USB from the new screen). On the new screen, tap “Console” to open the original SYNC system, then go to Media → USB and play the MP3 file. Once the music starts playing, press the Home icon to return to the Android screen and open the “HD MOVIE” app. If the USB music stops at this point, it means the audio channel has successfully switched to the Android system.**

SYNC 2 Audio Connection Video Tutorial:



1. Disconnect Original Bluetooth and USB: Please disconnect, unpair, and remove the original Bluetooth connection from both your phone and the original SYNC system. Also, make sure your phone is not connected to the original radio via USB.

2. Check the Connector: Please make sure Both audio connectors are connected properly behind the unit.

3. Sync Module: Please make sure the original sync module has been transferred properly


4. Original Radio: Please make sure the original radio unit remains inside.

5. SYNC Menu: Go to the console and check if the sync menu displays correctly.

6. Speakers (Important): Go to **Console > FM/AM Radio** and check if the **original radio** is playing on all speakers.

7. The new system audio uses the original USB channel; a USB drive may be required in the original USB port to activate it.

- **Prepare USB:** Copy at least **one MP3 file** to a USB drive.
- **Plug USB:** Insert it into the **original factory USB port** (not the new screen USB).
- **Open SYNC:** Tap “**Console**” on the new screen.

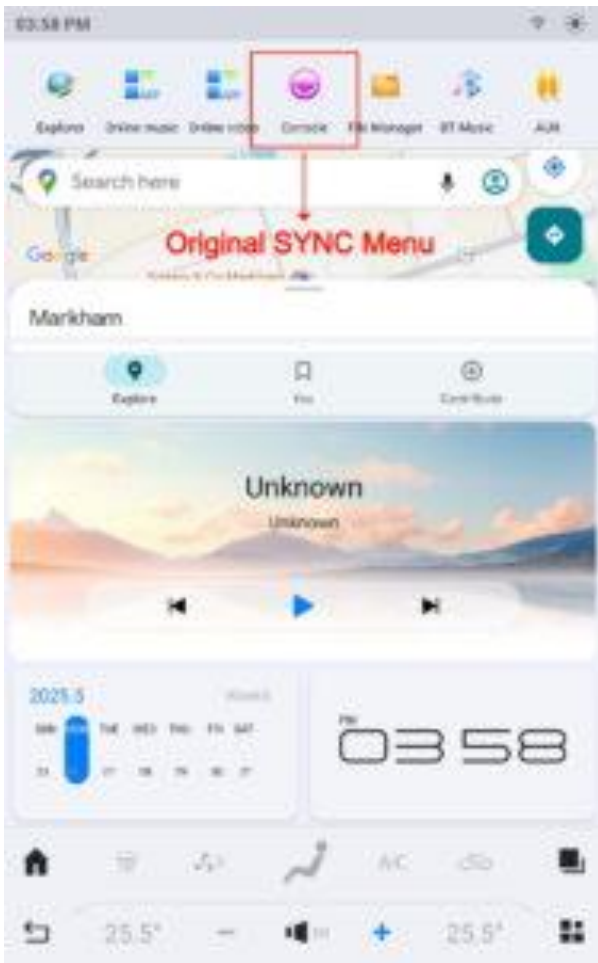

- **Play Music:** Go to **Media** → **USB** and **play** the MP3 file.
- **Return Home:** Press the **Home icon** to go back to Android.
- **Open App:** Tap “**HD MOVIE**”.



If the USB music stops, the audio channel has switched to the Android system successfully.

SYNC 2 Audio Connection Video Tutorial:



Trouble Shooting:

Original CD Player / Radio need to be stayed inside for SYNC 2 vehicles. SYNC Module / APIM also need to be transferred to the back of the new system. New system needs to work together with the original radio and original SYNC module.

1. Ensure the **original CD player remains connected** inside the vehicle.
2. Make sure the **original SYNC 2 system displays properly in Console mode.**
3. Confirm your phone is **not connected to the original radio via Bluetooth or USB.**
4. Ensure a **USB flash drive with a music file** is connected to the **original USB port.**
5. Verify that **both audio connectors behind the unit are properly connected.**

[SYNC 3 – Audio Connection Tutorial]

Note: If you experience audio issues after installation, please perform a factory reset first. Then, refer to the video below for the next steps. Please also ensure that the original CD player/radio unit remains connected inside the vehicle, as it also functions as the audio signal processor.

- Please make sure the original SYNC module has been transferred to the new system and is displaying properly in Console mode.
- Please also make sure the original radio module / CD player remains connected inside the vehicle.

Reset Procedure:

1. Go to Setting – System
2. Scroll down the menu and select “Factory Reset”
3. ERASE ALL DATA


After a factory reset, if the CarAuto application (CarPlay/Android Auto) asks for activation, please follow these steps:

1. Connect to Wi-Fi and ensure the internet is working properly.
2. Verify that the time zone and system time are correctly set for your location.
3. Open the Chrome browser and try to play a video on YouTube to confirm that the internet connection is working properly.
4. Close the CarAuto app completely.
5. Reopen the CarAuto app.

The Apple CarPlay / Android Auto should activate automatically as long as the internet connection is active.

SYNC 3 Audio Connection Procedure:

- 1. Delete Original Bluetooth:** Please disconnect, un-pair and delete the original Bluetooth from **BOTH** the phone and the original SYNC system.
- 2. Check the Connector:** Please make sure the small white audio connector is connected properly behind the unit.
- 3. Sync Module:** Please make sure the original sync module has been transferred properly (Please pay attention to the orientation of the SYNC module)
- 4. Original Radio:** Please make sure the original radio unit remains inside.
- 5. SYNC Menu:** Go to the console and check if the sync menu displays correctly.

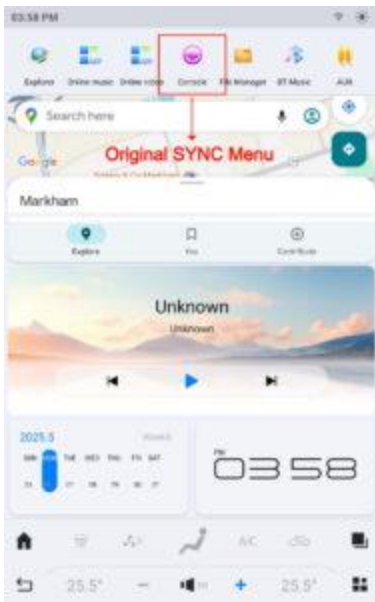

6. Speakers (Important): Go to **Console > FM/AM Radio** and check if the **original radio** is playing and all speakers are working properly. Make sure you can hear the **FM/AM radio** from the original Console menu before proceeding.

7. SYNC in the background: Tap the **“Home”** icon at the bottom-left corner of the screen. Do not tap the **“Go Back”** icon, as this will close the SYNC menu and interrupt the process.



8. Audio Channel Switching: On the new system, tap the HD Movies/Video Media app from the top menu. This will automatically switch the audio channel to the new system.

9. Final Testing: If you notice that the FM/AM radio has stopped playing, it means the audio channel has successfully switched to the new Tesla system. Now, you can open YouTube and play any media to confirm everything is working properly.

SYNC 3 Audio Connection Video Tutorial:



Check Wiring Harness

Note: Please carefully inspect the wiring harness before installation and ensure that there is no damage or any loose pins.



Please check the connectors are connected the same way as the pictures shown above



This red audio decoder must be connected properly to the main harness



This small speaker is not required to be connected for most vehicle models. If you experience any issues with Bluetooth phone calls, please disconnect it and try again.

[Audio Amplifier Setting]

After the installation, if your speakers are not fully functional. You can follow the steps below:

Step 1: Go to Settings – System – Setting Guide

Step 2: Turn on “Factory AMP”

Step 3: Select “Save & Reboot”



[SYNC 2 ONLY – Fixing Touch Screen Issues on Original SYNC 2 Menu]

If your Tesla-style screen is functioning properly but the touch response on the original **SYNC 2 interface** is reversed or misaligned, you can follow the steps below to recalibrate it.

The SYNC 2 system can be accessed by tapping the “**Console**” icon on the screen.

Step 1: Tap “**Console**” to activate the original SYNC 2 screen.

Step 2: Using **one finger**, press and hold anywhere on the SYNC 2 screen for approximately **15 seconds**. The screen will turn **black and restart automatically**.

Once the screen turns back on, the touch alignment should return to normal.

[Reset Procedure]

Note: If you experience audio issues after installation, please perform a factory reset first. Then, refer to the video below for the next steps.



[Reset Procedure]

Hardware Reset:

If the screen remains blank or black when you start the vehicle, please use a small pin (such as a SIM card tray ejector pin) to press the reset button.

Important: Do not use a paper clip or anything larger than the ejector pin, as it may crack the screen.

The reset button is usually located at the front of the unit and is labeled “**RST**” beside it. Once pressed, the system will restart.

Note: This will not erase the softwares that you installed on the unit recently, also, it will not change the settings back to factory default state.

Software Factory Reset:

If you want to reset the software and settings of the system back to factory state, you can follow the steps below:

1. Go to Setting – System
2. Scroll down the menu and select “Factory Reset”
3. Erase All Data

After a factory reset, if the CarAuto application (CarPlay/Android Auto) asks for activation, please follow these steps:

1. Connect to Wi-Fi and ensure the internet is working properly.
2. Verify that the time zone and system time are correctly set for your location.
3. Open the Chrome browser and try to play a video on YouTube to confirm that the internet connection is working properly.
4. Close the CarAuto app completely.
5. Reopen the CarAuto app.

The Apple CarPlay / Android Auto should activate automatically as long as the internet connection is active.

Note: This will erase the software that you installed on the unit recently, it will also reset the unit back to factory condition. If the reverse camera is not working after the reset, you can follow the steps below:


1. Go to settings – Systems – Factory Setting (Password: 7890) – Reversing Format – Select “VGA” or “CVBS”

[WiFi Connectivity]

In order to connect to WiFi, first you will need to make sure you are not using wireless Apple CarPlay or Android Auto at the same time. If you have connected to wireless Apple CarPlay, please turn it off from the cellphone first. For more details, please refer to the section below [Apple CarPlay].

1. Pull down the menu from the top edge of screen, hold the WiFi icon to open the WiFi connection menu.
2. Connect the WiFi to the hotspot of the cellphone.
3. Go to Setting – System – Android – Time Setting
4. Turn ON Network Time
5. Turn OFF auto time zone and manually adjust the time zone according to your area
6. Make sure the time on the upper left corner of the screen matches with your area's local time.
7. Once the time matches with the local time, WiFi should work.
8. To check whether the internet connection is working, you can simply open YouTube in the internet browser. If it loads, the connection is successful.

Secondly, you can go to Setting from the main Android interface, select Time and manually change the date and time under this menu.

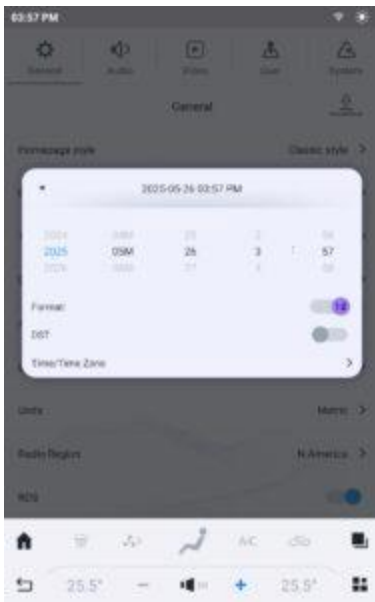

[4G LTE]

After inserting the SIM card, please use a small pin (such as a SIM card tray ejector tool) to gently press the RESET button. The reset button is usually located at the front of the unit and labeled as “**RST**”. Once pressed, the system will restart and recognize the SIM card automatically.

Important: Do not use a paper clip or anything larger than the ejector pin, as it may crack the screen.

For the Sim Card, in order to get a better compatibility, we would suggest you to use a Data Only medium size sim card. The cellular plan will not be compatible, only data plan will be compatible. Also, you may need to setup an APN as well. We have tested the network on Mint Mobile / T-Mobile and they work fine. Once you insert the sim card, you can also try to use a tiny pin to reset the unit, the unit should recognize the sim automatically if it's compatible with the unit. Please also make sure the LTE antenna is located at a position where can receive the signal as well.

For Mint Mobile: All you need to do is to insert the SIM card with the unit power off and then power the unit back on and after a few seconds it recognizes the SIM card. Mint Mobile will ask you to download their app online whether you use your smartphone or your laptop and so you can activate the card online.

IMEI Number:


To locate the IMEI number, please follow these steps:

Go to Settings > Android Settings > Mobile Network, and you will find the IMEI number listed there.

[Bluetooth]

If you are not able to pair the bluetooth with the screen. Please follow the steps below:

- Go to the Bluetooth menu of your cellphone, search for previous pairing record. Unpair and Delete it.
- Go to the Bluetooth menu of the new system. Click on the Connection icon on the Bluetooth menu.
- Turn off the Bluetooth of the cellphone and turn it back on again.
- Search the Bluetooth name of the new system again on the phone.

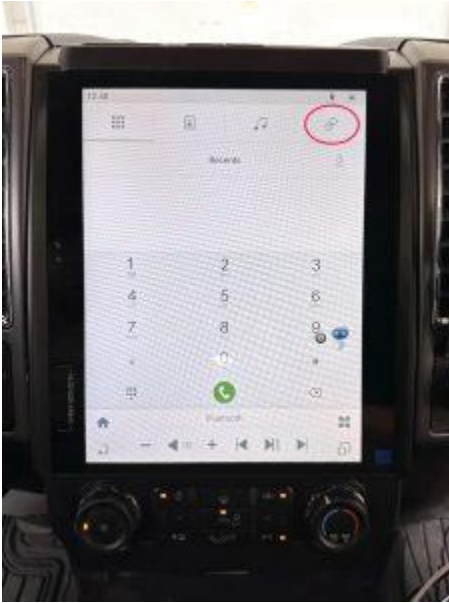

[Google App]

After the installation, if you can't use the Google App. Please make sure you have connected to a functioning network and follow the steps below:

1. Connect to the WiFi hotspot of the cellphone
2. Open the internet browser and confirm the internet is working.
3. Make sure the time zone is synchronized to your area.
4. Go to Setting – System – Factory Setting (Password: 7890)
5. Look up a setting “Google App”. Make sure it's turned on
6. Click “Save & Reboot”



[How to remove the tiny Robot icon on the main screen]

If you have the following issue or would like to remove the robot icon from the main screen, please follow the steps below:

Symptom:

1. Apps open by itself

The apps open by itself is because of the built-in voice assistant app. You can remove / turn off the Voice Assistant (tiny robot icon) from the app list. In order to turn it off, please follow the steps below:

Go to App List of the system, look for *Toppal Voice*, turn off all the features, then the robot icon will be removed from the screen.

[Weather]

How to change the Weather Location on the main interface:



[Apple CarPlay / Android Auto Activation]

If the system asks for activation after a software reset, please follow these steps:

1. Connect to Wi-Fi and ensure the internet is working properly.
2. Verify that the **time zone** and **system time** are correctly set for your location.
3. Open the **Chrome browser** and try to play a video on **YouTube** to confirm that the **internet connection is working properly**.
4. Close the **CarAuto** app completely.
5. Reopen the **CarAuto** app.

The system should activate automatically as long as the internet connection is active.

[Apple CarPlay]

How to switch between Apple CarPlay and WiFi Hotspot:



How to connect / reset wireless Apple CarPlay:

Note: If you have any difficulties on connecting the CarPlay on the new system, please make sure you have **DISCONNECTED** the cellphone from the original Bluetooth first. You can go to the Bluetooth menu of the cellphone to confirm it. If you see any connections with the original system, please disconnect and unpair it before try to connect the CarPlay from the New Android Screen.

Wireless Apple CarPlay only use Bluetooth to pair at the beginning, once it got paired, it will automatically switch to the WiFi channel at the background. While using Wireless Apple CarPlay, you can not turn on WiFi hotspot at the same time. If you would like to turn on the WiFi Hotspot to use some of the applications (such as YouTube..etc), you will need to turn off the CarPlay first. The procedure to turn off the CarPlay shows as below:



CarPlay Reset Procedure:

Important Notes Before Pairing:

- **Disconnect the Original Bluetooth:** Ensure your phone is **disconnected and unpaired** from the vehicle's **original Bluetooth system**. Your phone can only connect to **one Bluetooth system** at a time.
- **Avoid USB Connection to the Original System:** Do **not connect your phone via USB** to the original car system, as it may cause conflicts.
- **Charging Recommendation:** If you need to charge your phone, use a **12V cigarette lighter charger** instead of the USB port. It provides faster charging (12V vs. 5V).
- **Wi-Fi Hotspot Limitation:** Wireless Apple CarPlay or Android Auto cannot be used while your phone's Wi-Fi hotspot is active.

How to Reset & Reconnect CarPlay/Android Auto

Part 1: Clear Previous Connection Data from iPhone

1. Erase CarPlay Settings (iPhone only):

- Go to (Phone): Settings > General > CarPlay
- Delete all previously connected vehicles.

2. Remove Bluetooth Pairing:

- Go to your phone's Bluetooth settings.
- Locate the Tesla screen's Bluetooth name.
- Select **"Forget"** or **"Unpair"**.

3. Restart Your Phone.

Part 2: Clear Previous Connections on Tesla Screen

1. Open the Bluetooth menu on the Tesla screen.
 2. Tap the **connection icon** (upper-right corner).
 3. **Delete all previously paired phones** from the list.
 4. **Restart the Tesla unit:**
- Use a pin to press the **"RST"** reset button, usually located at the front of the unit.

How to Connect Wireless Apple CarPlay:

1. On the Tesla Screen:

- Go to the Bluetooth menu.
- Tap the **connection icon**.

2. On Your Phone:

- Go to Bluetooth settings.
- Pair your phone with the new Tesla system.

Note: CarPlay uses Bluetooth only for initial pairing. After pairing, it switches to Wi-Fi automatically in the background. It's normal for Bluetooth to show “Disconnected”—do not reconnect it manually.

3. Once paired, the screen should automatically launch **CarAuto** (CarPlay/Android Auto). If it doesn't, open the **CarAuto** app manually from the app list.

4. On your iPhone, **accept the prompt** to authorize CarPlay connection.

Once setup is complete, you're ready to enjoy Wireless CarPlay/Android Auto!

Guidelines for Using CarPlay/Android Auto:

Connection Requirements

- **Wireless CarPlay/Android Auto uses your phone's WiFi channel** to operate.
- While connected, your phone's WiFi is occupied by CarPlay/Android Auto.
- **Do not manually connect your phone's WiFi hotspot to the Tesla system** while CarPlay/Android Auto is active — this may cause conflicts or connectivity issues.

Automatic Switching Behavior

- After pairing is complete, the system will **automatically switch from Bluetooth to WiFi** to run CarPlay/Android Auto.
- Once connected via WiFi, **Bluetooth will show as “Disconnected”** — this is normal.
- **Do not manually reconnect Bluetooth** after CarPlay/Android Auto is running.

How to Disconnect CarPlay and Use WiFi Hotspot Instead

If you prefer to use your phone's WiFi hotspot for internet on the system rather than CarPlay/Android Auto, follow these steps:

Step 1: Disable CarPlay on iPhone

- Go to: Settings > General > CarPlay
- Find the Tesla system and **turn off CarPlay** (do not delete the connection).

Step 2: Enable Phone's WiFi Hotspot

- Turn on the **WiFi hotspot** feature on your phone.

Step 3: Connect the System to Hotspot

- On the Tesla system, open **WiFi settings**.
- Connect to your phone's hotspot.
- The system may automatically open the **CarAuto** app and disable WiFi again.

If this happens:

- **Close the CarAuto app.**
- **Manually re-enable WiFi** on the Tesla system.

Note: The system will automatically try to launch CarPlay/Android Auto anytime your phone connects via Bluetooth.

To Keep the System in Hotspot Mode

- Open the **CarAuto app settings** on the Tesla screen.
- **Disable the “Auto Connect” option** to prevent automatic switching back to CarPlay/Android Auto.

[Android Auto]

How to connect / reset wireless Android Auto:



How to Prevent CarPlay from Auto-Launching:

To keep the Tesla system connected to your phone’s WiFi hotspot instead of automatically launching CarPlay/Android Auto:

1. **Disconnect your phone from the Tesla system** (turn off Bluetooth or forget the connection temporarily).
2. On the Tesla screen, **open the CarAuto app**.
3. Tap the **Settings icon** located at the bottom-right corner.
4. In the Settings menu, **disable the “Auto Connect” option**.

Result: CarPlay/Android Auto will no longer launch automatically when your phone connects. This allows the system to remain in WiFi Hotspot mode for internet access.

How to use original microphone and wifi hotspot on the new system at the same time:

1. Use the Original Microphone:

- To use your vehicle’s **original microphone**, please **pair your phone only with the factory (original) Bluetooth**.

- **Do not pair your phone with the new Tesla-style system** at the same time.
- This setup ensures that your phone calls will continue to use the **factory-installed microphone** for better voice quality.

2. Share Wi-Fi Hotspot with the New System:

- You can **enable the Wi-Fi hotspot on your phone** and connect the new Tesla system to it.
- This allows the new system to **access the internet** for media streaming apps like **YouTube, Netflix**, and others.
- **Bluetooth and Wi-Fi can function independently**, so while Bluetooth is connected to the original system, Wi-Fi can still be shared with the new one.

Note:

- **Please note that connecting your phone this way means that you can not use wireless Apple CarPlay / Android Auto on the new system.**
- **Instead, you will be able to use the original microphone for phone calls while sharing your phone's internet with the new Tesla-style system for media streaming.**
- This is because your phone's Bluetooth must remain connected to the original radio for the microphone to function, and **wireless CarPlay requires a Bluetooth connection to the new system.**
- If wireless CarPlay is important to you, you would need to pair your phone with the new system instead, which would disable use of the original microphone.

[How to Install Aftermarket REVERSE Camera:]

In order to install the backup camera to the system, basically you only need to run the cable from the tailgate to the front unit underneath the vehicle. (Caution: At the back end of the camera wire, there are two wires RED and BLACK, please cut it and tape it. Please make sure both red wire and black wire do not touch each other and cause short circuit. Otherwise, it will burn the camera). Please test the whole camera system and all the wire first before run the wire underneath the truck. Make sure the camera is working before run any camera wire.

The new system provides camera power through the wire labeled "CCD-12," and the camera signal should be connected to the RCA connector labeled "CCD-V." You only need to connect the CCD-12 power wire from the screen to the camera (typically the red power wire on the camera side). There is no need to connect any power from the reverse light at the rear of the vehicle. Instead, you should cut and properly tape off the "RED" and "BLACK" wires at the back end of the camera cable, ensuring they do not come into contact with each other, as any exposed metal could cause a short circuit and potentially damage the camera. Additionally, please go to the reverse settings and change the reversing format to "CVBS." For more detailed instructions, you may continue reading below.

For the wiring instruction, you can also take a look of the video instruction below for a reference.

Below is a video tutorial to show you an introduction of the wiring harness. It may not be exactly the same as your model but it will be similar to all the models.:



Software Settings:

If you are installing the **aftermarket camera**, you will also need to go to Settings – System – Factory Setting (7890 / 666888) – Reversing Format – Change it to “**CVBS**“, then click “Save and Reboot”.

If it's the **OEM camera**, you will also need to go to Settings – System – Factory Setting (7890 / 666888) – Reversing Format – Change it to “**VGA**“, then click “Save and Reboot”.

Trouble Shooting:


- 1) Please prepare a voltage tester. Make sure the wire CCD-12 provide 12V power.
- 2) Please make sure the RED wire at the back end of the camera wire (The end that connect to the reverse camera, it comes with RED and BLACK wire.) Since the system provides 12V power from the front to the camera , there should also be 12V power on the RED wire of the camera side.
- 3) Please make sure the Reversing Camera setting is set to “CVBS”.
- 4) Please make sure the camera wire is not damage.

[How to Install Aftermarket FRONT Camera:]

In order to install the front camera, currently we do not have instruction for it.

- 1) You can simply run the wire from the front to the screen, the camera signal can be connected to AUX-V, and
- 2) In order to provide the power to the camera, you can get the power from any of the accessory wire (+12V) in the vehicle. Please don't get the power directly from the unit, you can get the power from the fuse box of the vehicle.
- 3) In order to activate the front camera, you can click on the icon (AUX) from the app list.

Note: The power out put from the unit (CCD-12 / CCD-6) are only for the reverse camera power. The power can only be activated when the car is in reverse, therefore it can't be used for the front camera.

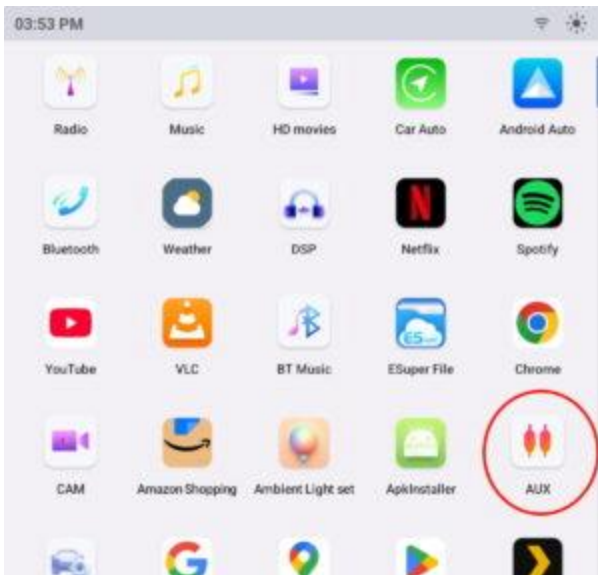

Camera Image & Parking Guideline Settings

Note: In order to switch the left and right mirror image of the camera, you can connect both “WHITE” and “GREEN” wire at the back end of the camera. The white one control the guidance line and the green one control the mirror image of the camera.

At the back of the front camera, you will find two small control wires: WHITE and GREEN. These wires are used to adjust the camera display settings.

WHITE wire – Parking Guidance Lines

This wire controls the on-screen parking guidelines (the colored lines that help estimate distance when parking). Before connecting or disconnecting these wires, please **disconnect the power from the camera first**. After adjusting the wires as needed, you can **reconnect the power to the camera** to apply the change

Connected (Disable Guideline) → Parking guideline lines will appear on the screen.

Disconnected (Enable Guideline) → Parking guideline lines will be disabled.

GREEN wire – Mirror Image (Left/Right Orientation)

This wire controls whether the camera image is displayed in mirror mode or normal mode. Before connecting or disconnecting these wires, please **disconnect the power from the camera first**. After adjusting the wires as needed, you can **reconnect the power to the camera** to apply the change.

Connected (For Front Camera) → The image will be displayed in mirror mode (left and right are reversed).

Disconnected (For Reverse Camera) → The image will be displayed in normal orientation.

Important:

For a front camera, it is usually recommended to enable the mirror mode so the image displays in the correct orientation.

These wires are located near the camera cable at the back end of the camera, and they can simply be connected together or left disconnected to change the settings.