

Owner's Manual, Installation Instruction and Trouble Shooting Guideline:

Applies to the following models:

Chevrolet

Silverado 1500/2500/3500 (Retains Original OnStar) (2014 2015 2016 2017 2018 2019)

GMC

Sierra 1500/2500/3500 (Retains Original OnStar) (2014 2015 2016 2017 2018 2019)

Caution: If not necessary, please do not do Factory Data Reset from the system since it will erase all the settings of the system and you will need to adjust the settings again. By clicking on the RST button at the front of the unit will not be affected.

Before You Begin, Please Read the Following Instructions Carefully

1. Important: Make sure your phone is **NOT** connected to the original system via USB or Bluetooth. Before proceeding, delete and unpair any existing Bluetooth connections from **BOTH** the original vehicle system and your phone.

2. The system requires the original OnStar radio receiver / CD Player module (if applicable). It must remain installed and connected, or the system will not function properly.



3. Audio Connection: The audio of the system supports both AUX and Bluetooth (BT) channels. To connect the audio from the new system

to the vehicle's original amplifier system, you can use either the AUX connection or the Bluetooth audio connection.

AUX Audio Connection Method:

Please ensure that the audio cable included in the package is properly connected, and that the dummy AUX connector is plugged into the AUX port inside the armrest. The audio from the new system is routed through the vehicle's original AUX channel. If this cable is not connected correctly, there will be no sound from the system.



Video Instruction:



Switching to AUX Mode (On the original radio / Console mode):

To activate **AUX mode**, first connect the **AUX connector** to the **vehicle's original AUX port**. Once connected, the **original radio may automatically detect the connection and activate the AUX source** on the original screen. If it does not switch automatically, you can manually select **AUX** from the **Audio / Source menu** on the original screen (**Console mode**). If the **original screen does not display properly in Console mode**, please refer to the **Car Model / AC settings** section below.

1. **If the vehicle has an AUX port, connect the supplied AUX dummy connector (or any AUX cable) to the original AUX port. This step is only used to activate the original AUX channel..**
2. **Tap Console to bring up the original factory screen.**
3. **On the original screen, select Media → AUX.**
4. **Return to the home screen of the new system.**

You should now hear sound from CarPlay, YouTube, Bluetooth, Navigation, Radio apps, and all other Android applications.

Note:

After connecting the **AUX dummy connector** to the **original AUX port** (any AUX cable will work — the original AUX port only needs to detect that something is plugged in to activate the AUX option on the original media screen), you will need to go to the **original console screen** and switch the media source to **AUX**. You may also refer to your vehicle's service manual for instructions on how to change the media source.

Switching Media Modes (Bluetooth / USB / AUX / CD):

Method 1 – MEDIA Button:

Press the **MEDIA** button on the radio faceplate to cycle through the available audio sources, such as **USB, Bluetooth, AUX Input, and CD** (if equipped).

Method 2 – Touchscreen:

Press the **Audio** button on the home screen, then tap **“More”** to view all available audio sources and select **AUX**.

AUX Port Location: The AUX input is usually located inside the center console storage compartment, along with USB ports.
No Dedicated AUX Button: Many modern Silverado models do not have a dedicated “AUX” button, requiring you to use the touchscreen “Source” menu.

AUX Must Be Plugged In: If an AUX cord is not plugged in, it will not appear as an option.

BT Audio Connection Method:

Please make sure your phone is NOT connected to the original system (USB or Bluetooth). Delete any existing Bluetooth pairing from the original BT before proceeding.

Video Instruction:



Connecting Bluetooth Audio to the Original Radio (Console Mode):

Connecting Bluetooth audio on a Chevy / GMC vehicle with MyLink infotainment system involves pairing the Tesla system through the touchscreen interface while the vehicle is in Park. Please unpair your phone from the original BT (MyLink) before proceeding.

Steps to Connect Bluetooth Audio:

1. **Activate Bluetooth:** Turn on Bluetooth on your smartphone and ensure it is discoverable.
2. **Access Phone Menu:** On the Silverado screen, press the PHONE icon.
3. **Add Device:** Tap Connect Phone > Add Phone.

4. **Pair on Device:** On your phone's Bluetooth settings, select the vehicle's system (usually named "Chevrolet MyLink" or "My Chevrolet").
5. **Confirm PIN:** Confirm that the PIN displayed on your phone matches the one on the MyLink screen.
6. **Allow Access:** Allow the vehicle to access your contacts and messages if prompted.

Playing Bluetooth Audio: Once paired, select the **Media** icon on the screen and choose Bluetooth, or use the voice command "Bluetooth Audio" to start streaming music.

Tips for Troubleshooting

- **Voice Pairing:** You can also press the "Push to Talk" button on the steering wheel, wait for the beep, and say "Pair Phone".
- **Clear Old Devices:** If pairing fails, go to the Phone Menu, select "Manage Phones," and remove old devices to free up space.
- **Reset System:** If the connection is buggy, you can restart your phone or try turning the truck off and on.

Note: Please keep the **Bluetooth Audio mode selected at all times** to allow the new system's audio to play through the vehicle speakers. If any phones were previously paired with the original vehicle Bluetooth, we recommend disconnecting and removing them. Otherwise, they may automatically reconnect and interrupt the Bluetooth connection between the new system and the original radio.

4. Original Screen Configuration – Car Model / AC Settings: If the original screen in Console mode or the AC controls are not working properly, please check the Car Model / AC settings in the system menu. For more details, please refer to the section below.

- **Original Screen Display**

After installing the unit, you will need to configure the Car Model / AC menu and GM Screen Parameter settings so the system can properly communicate with the original factory screen and vehicle system.

For more details, please follow the steps below:

Note: If your vehicle is GMC Sierra, please select Silverado.

Step 1 — Set the Vehicle Protocol

1. **On the Android home screen, open Settings.**
2. **Go to Systems → Setting Guide (Enter Password: 666888).**
3. **Tap Car Model / AC Model.**
4. **Make sure Protocol is set to "Xinbasi"**
5. **After tapping Car Model / AC Model, double-click the correct vehicle model on the right side, then wait for the system to reboot automatically.**
6. **Return to the home screen of the new system, then tap Console to display the original factory screen. Check whether the original screen appears and is properly aligned on the new system.**

If the original screen does not appear or is not aligned correctly:

1. **Go back to Car Model / AC setting menu.**
2. **Try another vehicle option from the list.**

3. Double-click the model to confirm. The system will restart automatically.

Repeat this process until the original factory screen appears on the console and is aligned correctly.



Step 2 — Console Screen Alignment

Note: If the original screen is not aligned correctly in Console mode, please follow the steps below.

1. Go to Settings → Systems → Factory Settings (Enter Password: 7890).
2. Select GM Screen Parameter.
3. Choose a different parameter value (Auto, 0, 1, 2, 3, etc.).
4. Tap **Save and Reboot**.

After the system restarts, return to the home screen. Tap Console to bring up the original factory screen. Check if the screen appears and is properly aligned.

If the screen is still not aligned:

1. Go back to GM Screen Parameter.
2. Select another parameter value.
3. Tap Save and Reboot again.

Repeat this process until the original factory screen appears on the console and is aligned correctly.

Summary:

- Go to Settings → Systems → Factory Settings (Pwd: 7890) → GM Screen Parameter.
- Test different values, then Save & Reboot to fix alignment issues.

5. If the original display is not showing properly, please remove or disconnect this cable. You can then connect the original LVDS cable directly to the back of the new system.



Trouble Shooting – Possible Reasons Why Silverado Console Mode Is Not Showing::

- Please ensure the original OnStar module and CD player/radio were not removed during installation. Only the front dash panel should be replaced— all original components must remain connected inside the dashboard.
- If the mini USB LVDS adapter included in the package is connected, please remove it and test again. This adapter is only required for vehicles equipped with a factory rear entertainment system.
- Please check the Car Model / AC settings. Try selecting a different option, then click Save and Reboot the system.
- If the original screen appears misaligned in Console Mode, please adjust the settings under GM Screen Parameter.
- Kindly verify that all wiring connections behind the unit are properly secured.
- If any original components were previously removed, the new system may not function correctly, including Console Mode.

Menu:


- [Wiring Introduction – Android 13](#)
- [Installation Video Instruction](#)
- [IO3/IO4, IO5/IO6](#)
- [IOB](#)
- [How to use / setup the new infotainment system – Comprehensive Guideline](#)
- [Original Screen Display](#)
- [Alignment of Original Screen under Console](#)
- [Audio Setup Tutorial – AUX Version](#)
- [AUX Port Replacement](#)
- [Static Audio Noise](#)
- [Audio Amplifier Setting](#)
- [Audio Setup Tutorial – BT Version](#)
- [BT Trouble Shooting Guideline](#)
- [Stock Reverse Camera](#)
- [Rotary Knob Setting](#)
- [Aftermarket Camera Installation Instruction \(Front Camera / Reverse Camera\)](#)
- [Bakup Camera / Reverse Guideline](#)
- [BakupCamera / Reverse Mirrored Image](#)
- [Reset Procedure](#)
- [Screen Calibration](#)
- [WiFi Connectivity](#)
- [Bluetooth](#)
- [Google App](#)
- [4G LTE](#)
- [Weather](#)
- [Offline Navigation](#)
- [How to remove the tiny Robot icon on the main screen](#)
- [Apple CarPlay / Android Auto Activation](#)
- [Android Auto](#)

- [How to Install Aftermarket REVERSE Camera](#)
- [How to Install Aftermarket FRONT Camera](#)

Before the installation, please confirm you ordered the correct model for your vehicle: [HERE](#)


Please also take a picture of the back of the new system (There will be a label with the part number of the unit that you received). It will be easier to identify the model for warranty purpose.

Important: Please double-check that all connectors are securely and correctly connected before proceeding.

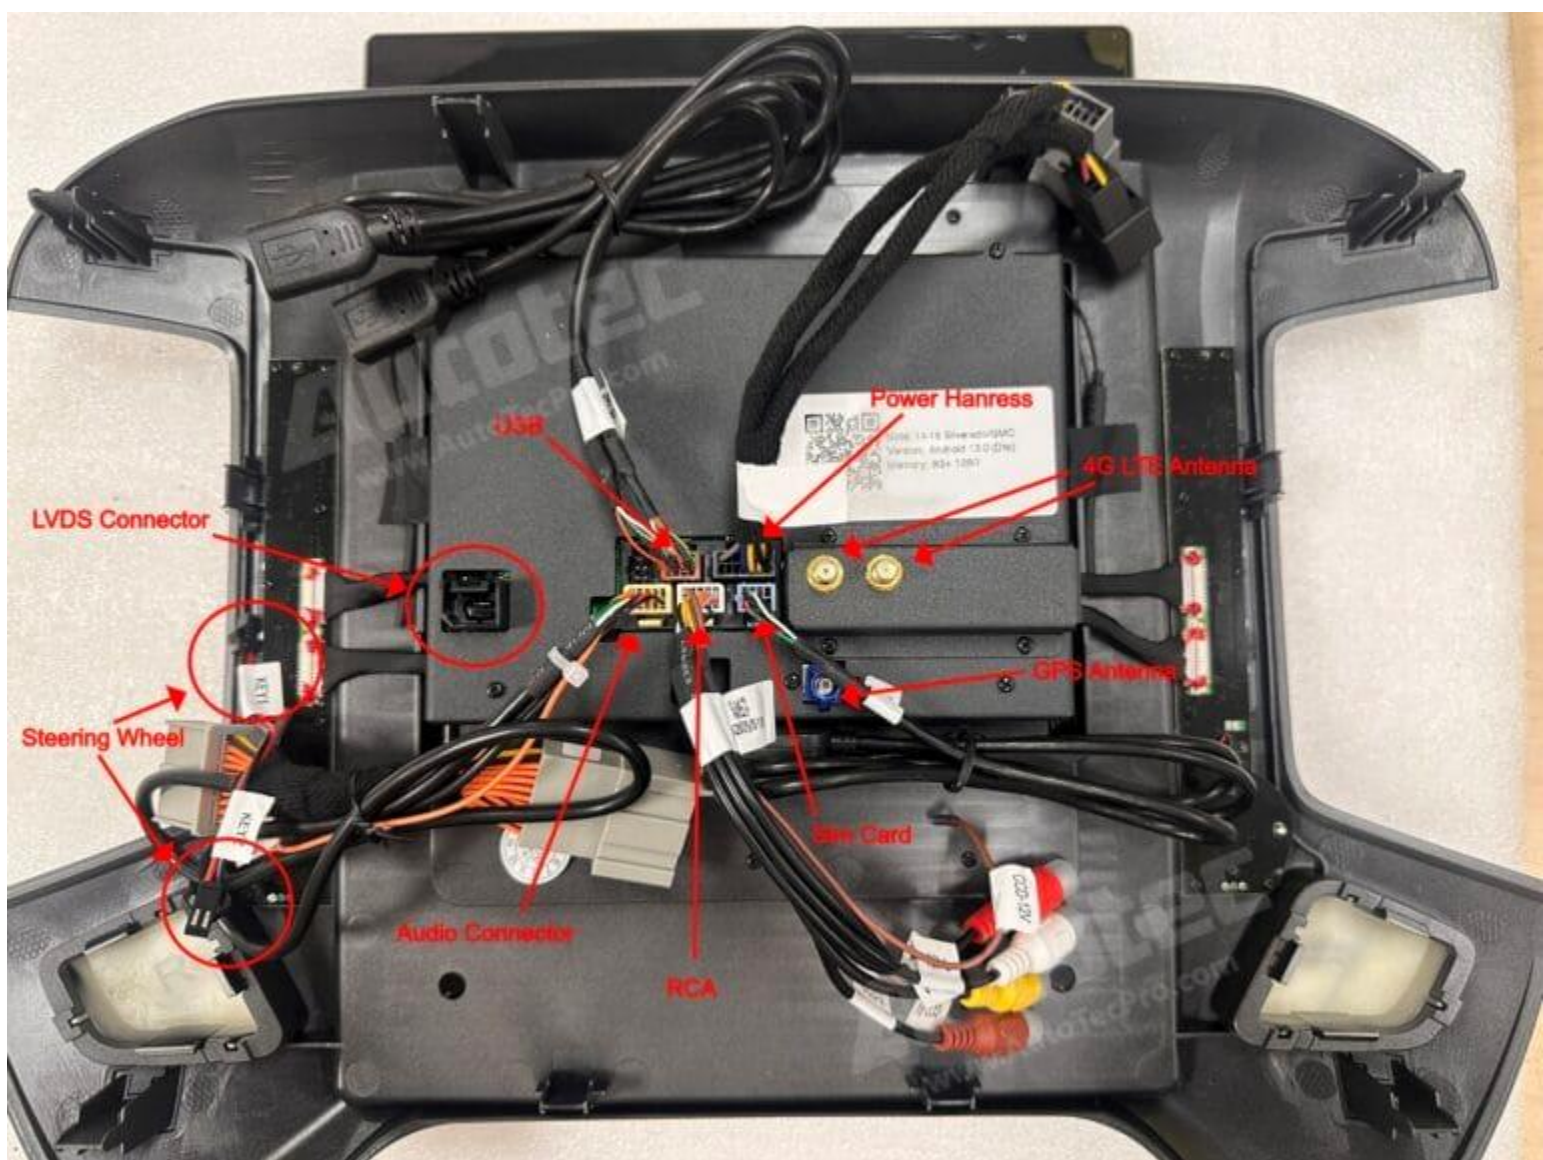

This harness must be connected to the original system, since this is the audio signal cable.



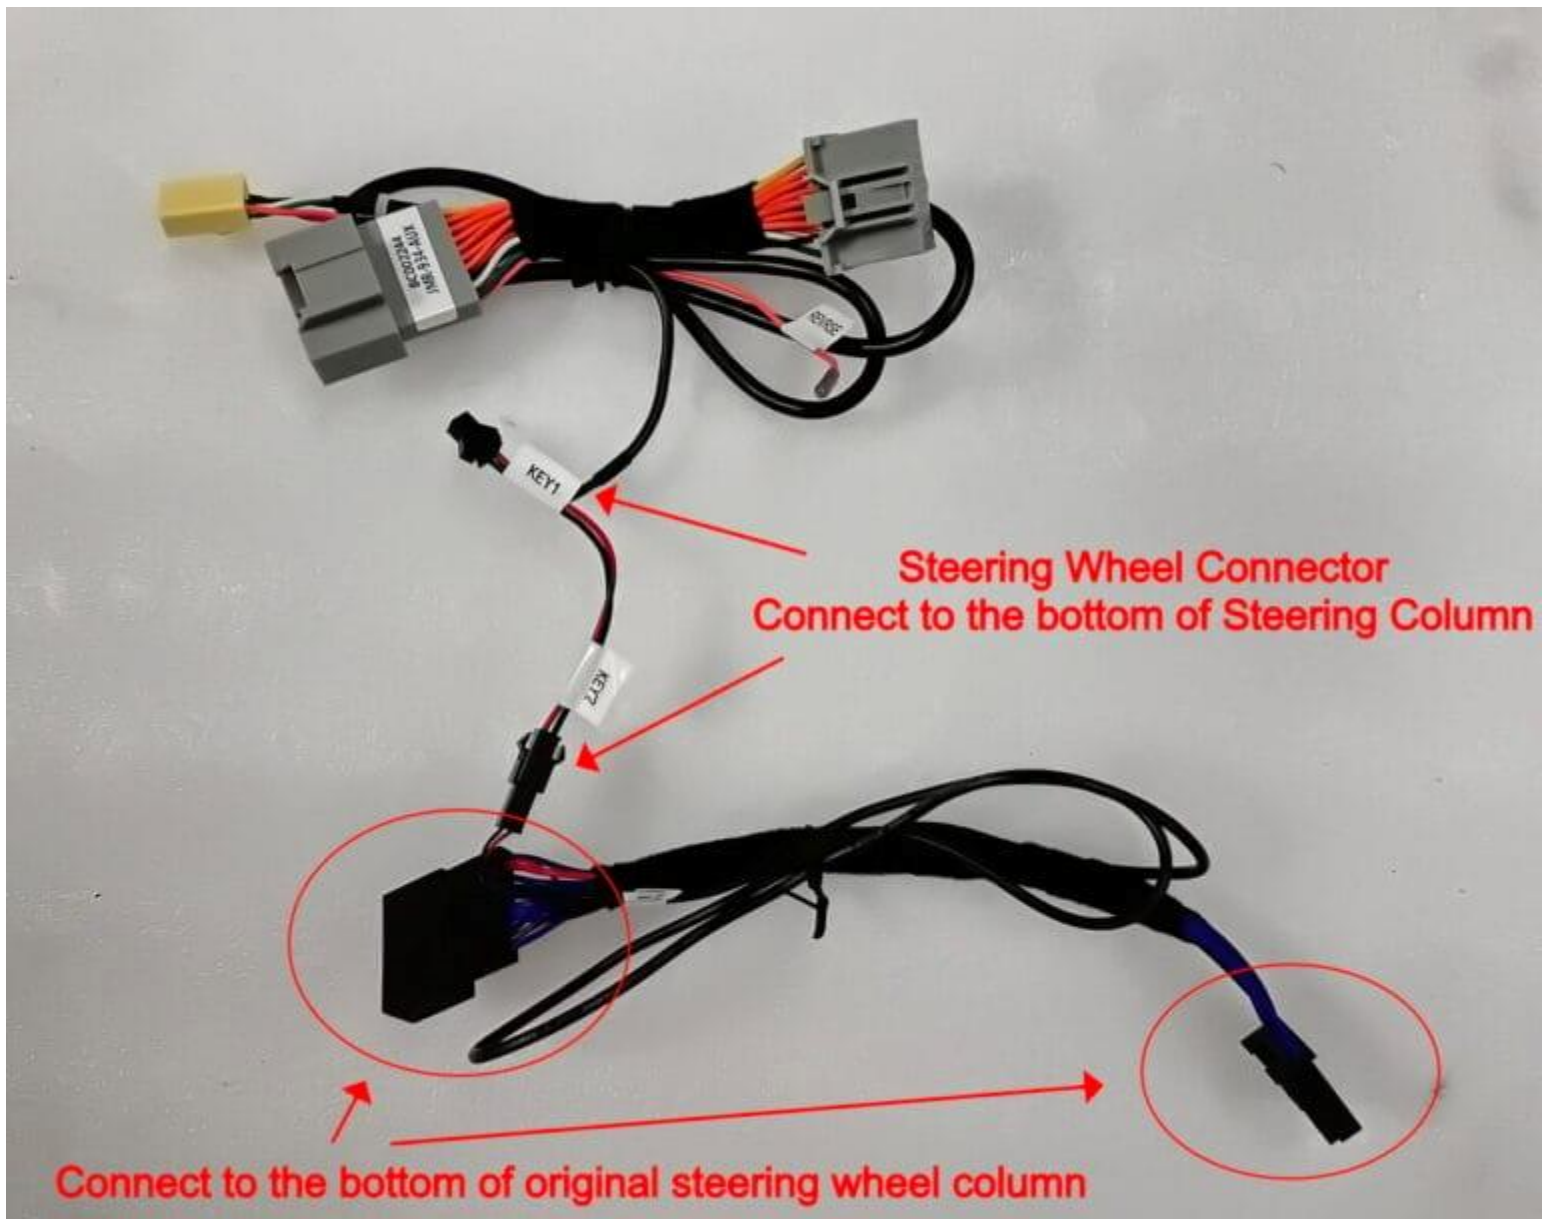

[Wiring Introduction – Android 13]

For all Android 13 systems, the Canbus decoder is integrated into the motherboard, and the wiring harness differs slightly from the Android 11 version, For further details, please take a look of the video below:

(IO3/IO4, IO5/IO6):



(IOB):



Attention:

This system is designed to work in conjunction with the original OnStar Communication Control Module. Please ensure that the module remains installed and connected in the original dashboard. If it is missing, the new system will not function properly.

[Installation Video Instruction]

[IO3/IO4, IO5/IO6]

Installation Video Instruction (IO3/IO4, IO5/IO6):

Version 1:



In order to learn how to setup the syste, please have a look on the video below:



[IOB]

Installation Video Instruction (IOB):



Wiring Instruction (IOB):



[How to use / setup the new infotainment system – Comprehensive Guideline]

The video tutorial below will show you step by step how to use and setup the infotainment system at the beginning. Please feel free to watch this video if you have any questions on how to operate the system.



How to change wallpaper on your tesla infotainment system?

1. **Switch to Modern Theme**
Go to **Settings** → **General** → **Theme**, and select **Modern**.
(Wallpaper is only supported in Modern theme.)
2. **Install Google Wallpaper**
Open the **App Store**, download **Google Wallpaper**, and install it.
3. **Apply Wallpaper**
Open the **Google Wallpaper** app and choose your new wallpaper.



Important: Please make sure all the harness mention shown in the picture below are connected properly. Even the harness is unused, they still need to be connected properly to the back of the unit. (From left to right, it should be: Blue > White > Yellow)
For some model, you may not require the blue harness.

Note:

1. “**Yellow**” Connector **MUST** be on the most **LEFT** side shown as the photo below. It’s the AUDIO source from the system.



[Original Screen Display]



This cable is only required if the vehicle comes with “ORIGINAL” headrest monitor, otherwise, please do NOT use this cable.

After the installation, if you have issues with the original screen displayed on the new system (Under Console), such as “original screen display as No Signal”, Lines on original screen, freezing...etc, you can follow the steps below for diagnostic.

Step 1:

If you have issues of the original Screen displaying on the new system (Console), such as freezing, Console touch screen not working, please make sure the micro-USB LVDS cable is not connected. If it's been connected, please remove it and try again.



Step 2:

Please check the settings on the system:

Note: If your vehicle is GMC Sierra, please select Silverado as the vehicle. Do not select General Motors, since GMC Sierra and Silverado share the same settings.

1. **Protocol needs to be set to “Xinbasi”.**
2. **Go to Settings – Systems – Setting Guide – Car Model/AC Model (Password: 666888) to confirm if you have the correct settings according to your original vehicle. Try different Car Models based on the year of your vehicle. You will also need to double click the “Car Model” to restart the system. For more details, please refer to our setup tutorial video instruction below.**
3. **For Screen Alignment: Go to Settings – Systems – Factory Settings (Password: 7890) – GM Screen Parameter (Please try different values, everytime when the new value is selected, please click “Save & Reboot”. This will also fix the issues of “Original screen” does not align up properly under the “Console” Screen.**



Note: After the installation, if the original camera doesn't show on the screen properly. Please make sure the original OnStar display properly first (By clicking on “Console” from the top of the menu bar) since the original camera signal belongs to the original screen signal. Also, you can try to connect a micro USB LVDS adapter as well. It's required for certain vehicle but not require for some other models, this Micro USB LVDS adapter mostly required for IO3/IO4 systems.

For more details, please have a look at the video below:



[Alignment of Original Screen under Console]

After installation, if original OnStar screen doesn't align up properly under “Console” menu, please follow the steps below:

1. **Go to Settings – Systems – Factory Settings (Password: 7890) – GM Screen Parameter (Please try different values, everytime when the new value is selected, please click “Save & Reboot”. This will also fix the issues of “Original screen” does not align up properly under the “Console” Screen.**

[Audio Setup Tutorial – AUX Version]

If you have any *Audio* issues after the installation, please refer to the link here: [HERE](#)

1. If the vehicle has an AUX port, connect the supplied AUX dummy connector to the original AUX port.

- Nothing needs to be plugged into the dummy connector.
- Its only purpose is to **activate the AUX option** in the factory radio menu.

2. On the factory radio, switch the source to AUX mode.

- Go to the “**Console**” to open the original interface and select AUX mode. Keep the Console running at the background. The audio from the new system should now go through the original AUX channel.
- You can switch to the original system’s AUX mode using the touchscreen or the steering wheel ‘Mode’ button.


If you CANNOT see the AUX option from the original media interface. Please check the original AUX port in the armrest since there might be issue on the original AUX port.

3. Test Audio – Open YouTube in the browser or play music/video on the new system to confirm that the sound works properly.



Important: Once the AUX connector is connected to the AUX port in the armrest, the original AUX channel will be activated under the original system. Please navigate to the “Console” to enter the original OnStar system and select AUX mode. The audio from the new system goes through the original AUX channel. If the audio quality is not as good as expected or if you hear the AUX noise, please make sure the original port is functioning properly. You can unplug the system and try the AUX port by connecting to any of AUX device and make sure the original system plays the music normally.

Important: Please double-check that **all connectors are securely and correctly connected** before proceeding.

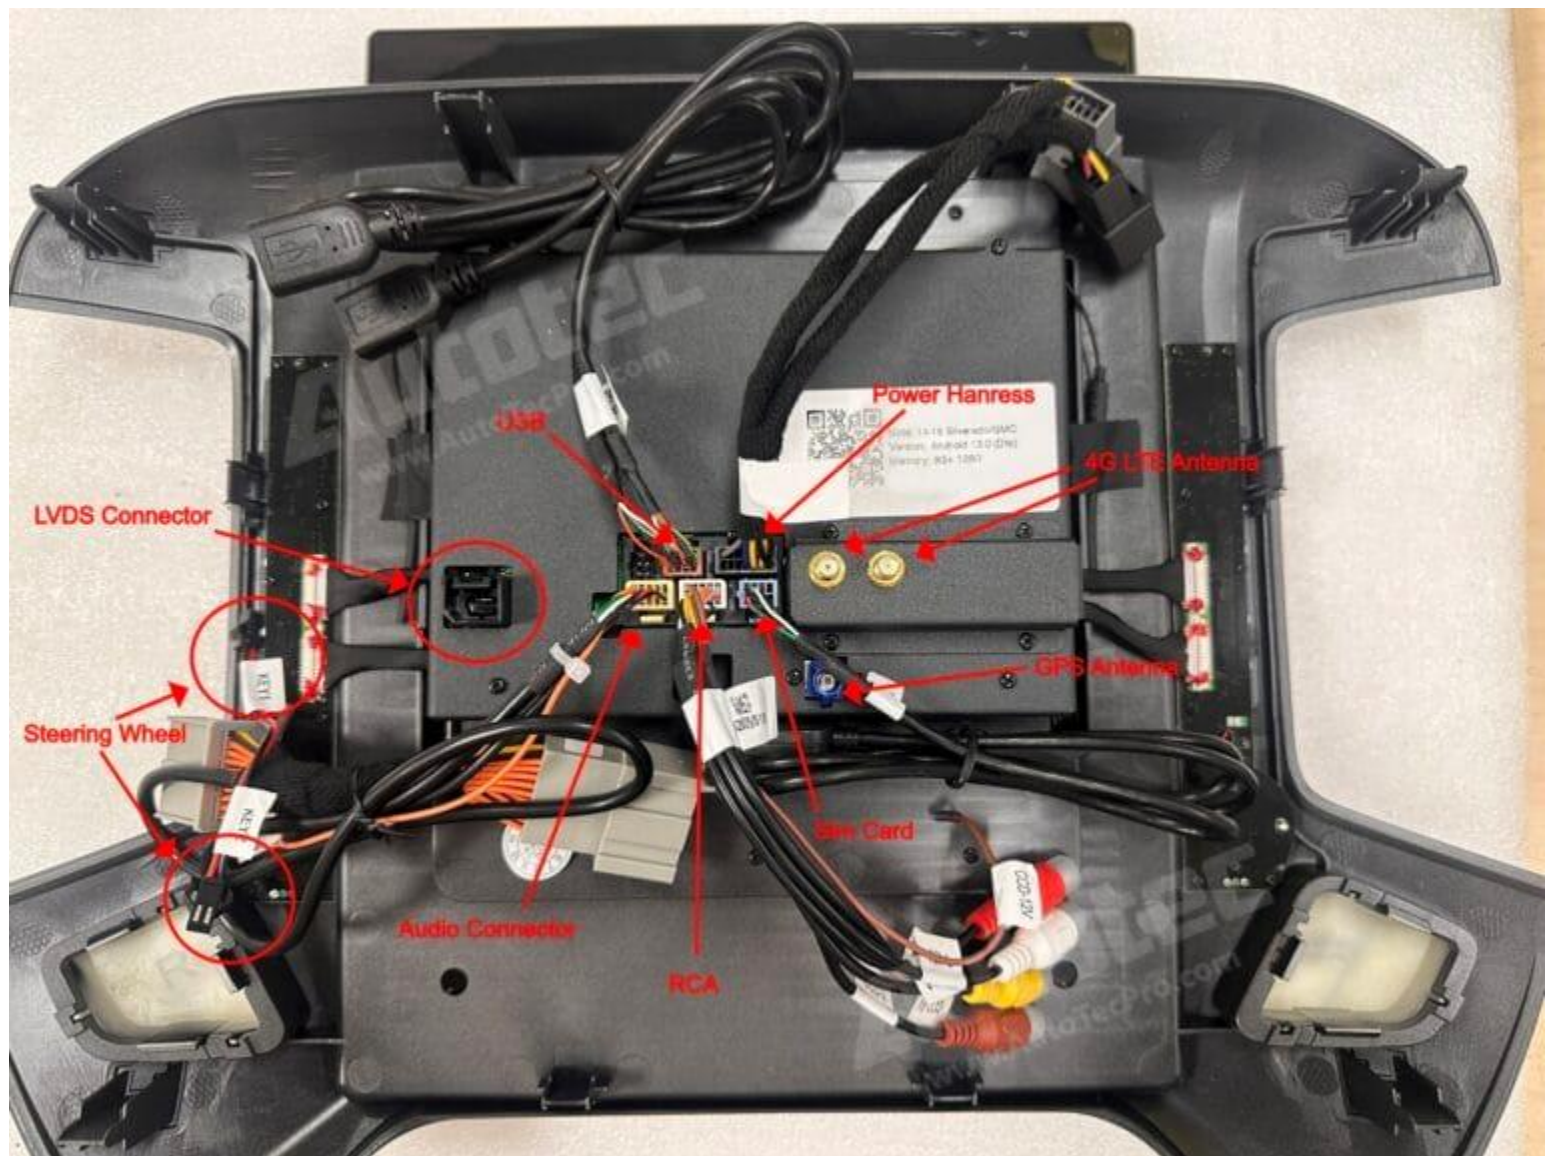

[AUX Port Replacement]

If after you have tried the steps above and still no sound. Please check if the original AUX port in the armrest is functional. In order to test it, you can connect an external music player by AUX. Make sure you can see and select the option AUX on the Original interface under “Console” mode.

Note: You will need to connect the dummy AUX connector in order to activate the AUX mode on the original system. So please make sure you have connected the dummy AUX connector properly to the armrest AUX port.

Otherwise, you can change the AUX port shown as below. We do not carry this adapter but you can purchase it from any Online Store or dealership as well.



[Static Audio Noise]

If the audio quality is not as good as expected or if you hear the AUX noise, please make sure the original port is functioning properly. You can unplug the system and try the AUX port by connecting to any of AUX device and make sure the original system plays the music normally.

- First confirm the original AUX port in the armrest is functioning. In order to confirm it, you can use an AUX cable to connect to an external audio device and play the music on it. Make sure the original AUX connector is working
- Connect the tiny AUX connector to the original AUX port in the armrest. (Please make sure the original AUX port is working originally.)
- Then go to the original OnStar menu under “Console”, go to original Media menu and manually select AUX on the screen. (If the original console screen is not working, please refer to the “Original Screen Display” section above to do a diagnostic.
- Once manually selected the AUX mode, click on the “Home” icon at the bottom left corner of the screen. By doing this way, the original OnStar system will be running at the background instead of closing it.
- Once the original system switched to the AUX channel, you can start to use the new system now.
- Try to play a video or YouTube and make sure the audio is working.

Note: If the audio is not working, please check the original AUX port in the armrest is functioning properly. You can try to hook up an external audio device with a AUX cable to confirm it. If it's not working, please change the original AUX port in the armrest.

After you have connected the AUX cable to the original AUX port (Located in the original armrest), if you can not hear anything or only the static noise, it could be because of the original AUX connector in the armrest that need to be replaced. Please try to change the AUX port in the armrest and try again.

[Audio Amplifier Setting]

After the installation, if your speakers are not fully functional. You can follow the steps below:

Step 1: Go to Settings – System – Setting Guide

Step 2: Turn on “Factory AMP”

Step 3: Select “Save & Reboot”



[Audio Setup Tutorial – BT Version]

Note: In order to setup the audio of the system, first you will need to connect the Bluetooth of the new tesla system to the original Bluetooth, since the audio from the new system goes through the original Bluetooth channel. When you want to use the new system, basically just need to go to the original media mode to switch to Bluetooth Audio.

How to Pair the New Tesla-Style System with the Original Bluetooth

1. Disconnect Phone from Original System

- Ensure your phone is **not** connected to the factory system via USB or Bluetooth.
- Delete any existing Bluetooth pairings from the factory system and remove all devices from its Bluetooth menu.

2. Access the Console

- Open the **Console** from the top menu bar.

3. Open Bluetooth Settings

- Tap the small “**Round Bluetooth icon**” that appears on the screen.
- On the factory system, go to **Bluetooth**.

4. Pair the Systems

- Pair the new Tesla-style system with the original Bluetooth.

5. Select Bluetooth Audio from the original radio (Important)

- From the factory media menu, select **Bluetooth Audio** and choose the new Tesla system as the source.

6. Test Audio

- Open YouTube in the browser or play music/video on the new system to confirm that the sound works properly.

For a detailed instruction, please take a look of the video below:

Audio Setup Tutorial :



[BT Trouble Shooting Guideline]

If you don't see the small “**Round Bluetooth icon**” under console mode. You can run a factory reset on the new system and try again.

1. Go to Setting – System
2. Scroll down the menu and select “Factory Reset”
3. Go to settings – Systems – Factory Setting (Password: 7890) – Reversing Format – Select “VGA”

[Stock Reverse Camera]

If the original camera is not showing on the screen while the original Onstar is showing on the “Console” Please check the settings below for Reverse Camera Settings.

-


[Rotary Knob Setting]

If you want to adjust the functionality of the rotary knobs on the unit. You can follow the steps below:

Step 1: Go to Settings – System – Setting Guide

Step 2: Adjust the setting on “SWC Prev/Next Button Negative”

Step 3: Select “Save & Reboot”

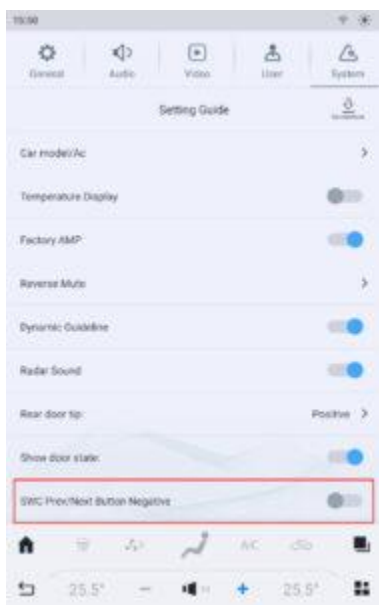

[Aftermarket Camera Installation Instruction (Front Camera / Reverse Camera)]

If you are trying to install an aftermarket Front Camera or Reverse Camera, please feel free to take a look here: [HERE](#)

[Backup Camera / Reverse Guideline]

You can turn ON/OFF the reverse guideline from the system by following the steps below:

Setting – System – Setting Guide – Dynamic Guideline

[BakupCamera / Reverse Mirrored Image]

If you have mirrored image when reverse (Left side become Right side / Right side become Left side), you can follow the steps below:

1. Change the gear to reverse and bring up the reverse screen first
2. Click on the Reverse setting menu on the bottom left corner
3. Adjust the settings of the option “Mirror”

[Reset Procedure]

Hardware Reset:

If the screen remains blank or black when you start the vehicle, please use a small pin (such as a SIM card tray ejector pin) to press the reset button.

Important: Do not use a paper clip or anything larger than the ejector pin, as it may crack the screen.

The reset button is usually located at the front of the unit and is labeled “**RST**” beside it. Once pressed, the system will restart.

Note: This will not erase the softwares that you installed on the unit recently, also, it will not change the settings back to factory default state.

Software Factory Reset:

If you want to reset the software and settings of the system back to factory state, you can follow the steps below:

1. Go to Setting – System
2. Scroll down the menu and select “Factory Reset”
3. Erase All Data

After a factory reset, if the CarAuto application (CarPlay/Android Auto) asks for activation, please follow these steps:

1. Connect to Wi-Fi and ensure the internet is working properly.
2. Verify that the time zone and system time are correctly set for your location.
3. Open the Chrome browser and try to play a video on YouTube to confirm that the internet connection is working properly.
4. Close the CarAuto app completely.
5. Reopen the CarAuto app.

The Apple CarPlay / Android Auto should activate automatically as long as the internet connection is active.

Note: This will erase the software that you installed on the unit recently, it will also reset the unit back to factory condition. If the reverse camera is not working after the reset, you can follow the steps below:

1. Go to settings – Systems – Factory Setting (Password: 7890) – Reversing Format – Select “VGA”

[Screen Calibration]

If the screen has some touch issue, you can re-calibrate the screen by following the steps below:


1. Hold FIVE fingers anywhere on the screen for around 10 seconds.
2. Follow the instruction on the screen
3. Click Save

[WiFi Connectivity]

In order to connect to WiFi, first you will need to make sure you are not using wireless Apple CarPlay or Android Auto at the same time. If you have connected to wireless Apple CarPlay, please turn it off from the cellphone first. For more details, please refer to the section below [Apple CarPlay].

1. Pull down the menu from the top edge of screen, hold the WiFi icon to open the WiFi connection menu.
2. Connect the WiFi to the hotspot of the cellphone.
3. Go to Setting – System – Android – Time Setting
4. Turn ON Network Time
5. Turn OFF auto time zone and manually adjust the time zone according to your area
6. Make sure the time on the upper left corner of the screen matches with your area’s local time.
7. Once the time matches with the local time, WiFi should work.
8. To check whether the internet connection is working, you can simply open YouTube in the internet browser. If it loads, the connection is successful.


Secondly, you can go to Setting from the main Android interface, select Time and manually change the date and time under this menu.

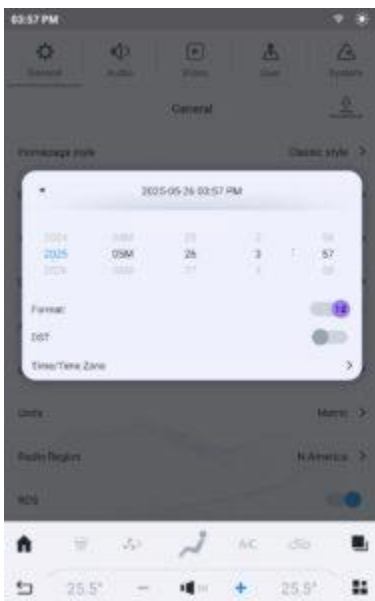

[Bluetooth]

If you are not able to pair the bluetooth with the screen. Please follow the steps below:

- Go to the Bluetooth menu of your cellphone, search for previous pairing record. Unpair and Delete it.
- Go to the Bluetooth menu of the new system. Click on the Connection icon on the Bluetooth menu.
- Turn off the Bluetooth of the cellphone and turn it back on again.
- Search the Bluetooth name of the new system again on the phone.

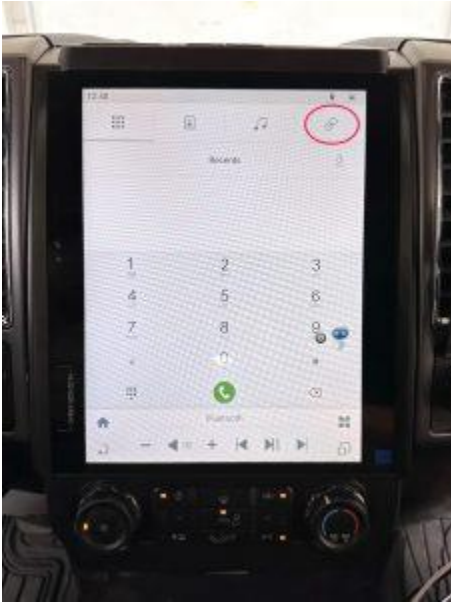

[Google App]

After the installation, if you can't use the Google App. Please make sure you have connected to a functioning network and follow the steps below:

1. Connect to the WiFi hotspot of the cellphone
2. Open the internet browser and confirm the internet is working.
3. Make sure the time zone is synchronized to your area.
4. Go to Setting – System – Factory Setting (Password: 7890)
5. Look up a setting “Google App”. Make sure it's turned on
6. Click “Save & Reboot”



[4G LTE]

After inserting the SIM card, please use a small pin (such as a SIM card tray ejector tool) to gently press the RESET button. The reset button is usually located at the front of the unit and labeled as “**RST**”. Once pressed, the system will restart and recognize the SIM card automatically.

Important: Do **not** use any object larger than the ejector pin, as it may crack the screen.

For better compatibility, we recommend using a data-only medium (micro) size SIM card, as cellular voice plans are not supported, only data plans will work. You may also need to configure the APN (Access Point Name) settings depending on your network provider. We have tested the unit with AT&T, Mint Mobile and T-Mobile, and both work well. Please also ensure that the 4G LTE antenna is positioned in a location with strong signal reception. If you experience weak signal or connection issues, try relocating the antenna to another spot with better coverage.

For Mint Mobile: All you need to do is to insert the SIM card with the unit power off and then power the unit back on and after a few seconds it recognizes the SIM card. Mint Mobile will ask you to download their app online whether you use your smartphone or your laptop and so you can activate the card online.

IMEI Number:


To locate the IMEI number, please follow these steps:

Go to Settings > Android Settings > Mobile Network, and you will find the IMEI number listed there.

In order to access the internet, please make sure the system time is synchronized with your local time.

1. Go to Setting – System – Android – Time Setting
2. Turn ON Network Time
3. Turn OFF auto time zone and manually adjust the time zone according to your area
4. Make sure the time on the upper left corner of the screen matches with your area's local time.
5. Once the time matches with the local time, WiFi should work.
6. To check whether the internet connection is working, you can simply open YouTube in the internet browser. If it loads, the connection is successful.

Secondly, you can go to Setting from the main Android interface, select Time and manually change the date and time under this menu.

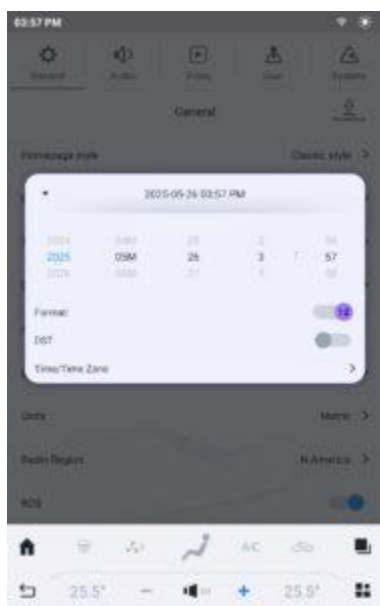

[Weather]

How to change the Weather Location on the main interface:




[Offline Navigation]

Using Google Maps for Offline Navigation. To use navigation without an internet connection, follow these steps:

1. Connect to WiFi – Ensure the device is connected to a stable WiFi network.
2. Update Google Maps – Open the Google Play Store, search for Google Maps, and update it to the latest version.
3. Download Offline Maps
4. Open the Google Maps app.
5. Tap your profile icon in the top right corner.
6. Select Offline maps > Select your own map.
7. Zoom and position the area you want to download.
8. Tap Download.

Once the map is downloaded, you'll be able to use navigation and search for locations in that area without an internet connection.

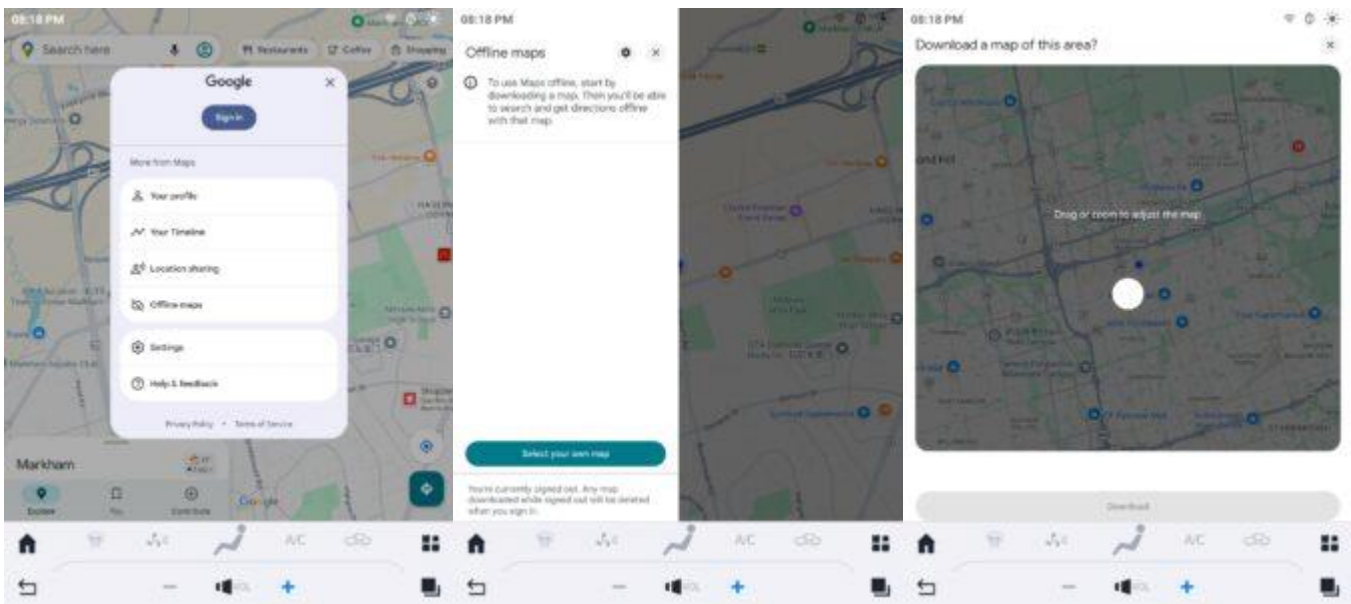

[Apple CarPlay / Android Auto Activation]

If the system asks for activation after a software reset, please follow these steps:

1. Connect to Wi-Fi and ensure the internet is working properly.
2. Verify that the **time zone** and **system time** are correctly set for your location.
3. Open the **Chrome browser** and try to play a video on **YouTube** to confirm that the **internet connection is working properly**.
4. Close the **CarAuto** app completely.
5. Reopen the **CarAuto** app.

The system should activate automatically as long as the internet connection is active.

[Apple CarPlay]

How to switch between Apple CarPlay and WiFi Hotspot:



How to connect / reset wireless Apple CarPlay:

Note: If you have any difficulties on connecting the CarPlay on the new system, please make sure you have **DISCONNECTED** the cellphone from the original Bluetooth first. You can go to the Bluetooth menu of the cellphone to confirm it. If you see any connections with the original system, please disconnect and unpair it before try to connect the CarPlay from the New Android Screen.

Wireless Apple CarPlay only use Bluetooth to pair at the beginning, once it got paired, it will automatically switch to the WiFi channel at the background. While using Wireless Apple CarPlay, you can not turn on WiFi hotspot at the same time. If you would like to turn on the WiFi Hotspot to use some of the applications (such as YouTube..etc), you will need to turn off the CarPlay first. The procedure to turn off the CarPlay shows as below:



CarPlay Reset Procedure:

Important Notes Before Pairing:

- **Disconnect the Original Bluetooth:** Ensure your phone is **disconnected and unpaired** from the vehicle's **original Bluetooth system**. Your phone can only connect to **one Bluetooth system** at a time.
- **Avoid USB Connection to the Original System:** Do **not connect your phone via USB** to the original car system, as it may cause conflicts.
- **Charging Recommendation:** If you need to charge your phone, use a **12V cigarette lighter charger** instead of the USB port. It provides faster charging (12V vs. 5V).
- **Wi-Fi Hotspot Limitation:** Wireless Apple CarPlay or Android Auto cannot be used while your phone's **Wi-Fi hotspot** is active.

How to Reset & Reconnect CarPlay/Android Auto

Part 1: Clear Previous Connection Data from iPhone

1. Erase CarPlay Settings (iPhone only):

- Go to (Phone): Settings > General > CarPlay
- Delete all previously connected vehicles.

2. Remove Bluetooth Pairing:

- Go to your phone's Bluetooth settings.
- Locate the Tesla screen's Bluetooth name.

- Select “Forget” or “Unpair”.

3. Restart Your Phone.

Part 2: Clear Previous Connections on Tesla Screen

1. Open the Bluetooth menu on the Tesla screen.
 2. Tap the **connection icon** (upper-right corner).
 3. **Delete all previously paired phones** from the list.
 4. **Restart the Tesla unit:**
- Use a pin to press the “RST” **reset button**, usually located at the front of the unit.

How to Connect Wireless Apple CarPlay:

1. On the Tesla Screen:

- Go to the Bluetooth menu.
- Tap the **connection icon**.

2. On Your Phone:

- Go to Bluetooth settings.
- Pair your phone with the new Tesla system.

Note: CarPlay uses Bluetooth only for initial pairing. After pairing, it switches to Wi-Fi automatically in the background. It’s normal for Bluetooth to show “Disconnected”—do not reconnect it manually.

3. Once paired, the screen should automatically launch **CarAuto** (CarPlay/Android Auto). If it doesn’t, open the **CarAuto** app manually from the app list.

4. On your iPhone, **accept the prompt** to authorize CarPlay connection.

Once setup is complete, you’re ready to enjoy Wireless CarPlay/Android Auto!

Guidelines for Using CarPlay/Android Auto:

Connection Requirements

- **Wireless CarPlay/Android Auto uses your phone’s WiFi channel** to operate.
- While connected, your phone’s WiFi is occupied by CarPlay/Android Auto.
- **Do not manually connect your phone’s WiFi hotspot to the Tesla system** while CarPlay/Android Auto is active — this may cause conflicts or connectivity issues.

Automatic Switching Behavior

- After pairing is complete, the system will **automatically switch from Bluetooth to WiFi** to run CarPlay/Android Auto.
- Once connected via WiFi, **Bluetooth will show as “Disconnected”** — this is normal.
- **Do not manually reconnect Bluetooth** after CarPlay/Android Auto is running.

How to Disconnect CarPlay and Use WiFi Hotspot Instead

If you prefer to use your phone’s WiFi hotspot for internet on the system rather than CarPlay/Android Auto, follow these steps:

Step 1: Disable CarPlay on iPhone

- Go to: Settings > General > CarPlay
- Find the Tesla system and **turn off CarPlay** (do not delete the connection).

Step 2: Enable Phone’s WiFi Hotspot

- Turn on the **WiFi hotspot** feature on your phone.

Step 3: Connect the System to Hotspot

- On the Tesla system, open **WiFi settings**.
- Connect to your phone’s hotspot.
- The system may automatically open the **CarAuto app** and disable WiFi again.

If this happens:

- **Close the CarAuto app.**
- **Manually re-enable WiFi** on the Tesla system.

Note: The system will automatically try to launch CarPlay/Android Auto anytime your phone connects via Bluetooth.

To Keep the System in Hotspot Mode

- Open the **CarAuto app settings** on the Tesla screen.
- **Disable the “Auto Connect” option** to prevent automatic switching back to CarPlay/Android Auto.

[Android Auto]

How to connect / reset wireless Android Auto:



How to Prevent CarPlay from Auto-Launching:

To keep the Tesla system connected to your phone's WiFi hotspot instead of automatically launching CarPlay/Android Auto:

1. **Disconnect your phone from the Tesla system** (turn off Bluetooth or forget the connection temporarily).
2. On the Tesla screen, **open the CarAuto app**.
3. Tap the **Settings icon** located at the bottom-right corner.
4. In the Settings menu, **disable the "Auto Connect" option**.

Result: CarPlay/Android Auto will no longer launch automatically when your phone connects. This allows the system to remain in WiFi Hotspot mode for internet access.

How to use original microphone and wifi hotspot on the new system at the same time:

1. Use the Original Microphone:

- To use your vehicle's **original microphone**, please **pair your phone only with the factory (original) Bluetooth**.
- **Do not pair your phone with the new Tesla-style system** at the same time.
- This setup ensures that your phone calls will continue to use the **factory-installed microphone** for better voice quality.

2. Share Wi-Fi Hotspot with the New System:

- You can **enable the Wi-Fi hotspot on your phone** and connect the new Tesla system to it.
- This allows the new system to **access the internet** for media streaming apps like **YouTube, Netflix**, and others.
- **Bluetooth and Wi-Fi can function independently**, so while Bluetooth is connected to the original system, Wi-Fi can still be shared with the new one.

Note:

- **Please note that connecting your phone this way means that you can not use wireless Apple CarPlay / Android Auto on the new system.**
- **Instead, you will be able to use the original microphone for phone calls while sharing your phone's internet with the new Tesla-style system for media streaming.**
- This is because your phone's Bluetooth must remain connected to the original radio for the microphone to function, and **wireless CarPlay requires a Bluetooth connection to the new system.**
- If wireless CarPlay is important to you, you would need to pair your phone with the new system instead, which would disable use of the original microphone.

[How to Install Aftermarket REVERSE Camera:]

In order to install the backup camera to the system, basically you only need to run the cable from the tailgate to the front unit underneath the vehicle. (Caution: At the back end of the camera wire, there are two wires RED and BLACK, please cut it and tape it. Please make sure both red wire and black wire do not touch each other and cause short circuit. Otherwise, it will burn

the camera). Please test the whole camera system and all the wire first before run the wire underneath the truck. Make sure the camera is working before run any camera wire.

The new system provides camera power through the wire labeled “CCD-12,” and the camera signal should be connected to the RCA connector labeled “CCD-V.” You only need to connect the CCD-12 power wire from the screen to the camera (typically the red power wire on the camera side). There is no need to connect any power from the reverse light at the rear of the vehicle. Instead, you should cut and properly tape off the “RED” and “BLACK” wires at the back end of the camera cable, ensuring they do not come into contact with each other, as any exposed metal could cause a short circuit and potentially damage the camera. Additionally, please go to the reverse settings and change the reversing format to “CVBS.” For more detailed instructions, you may continue reading below.

For the wiring instruction, you can also take a look of the video instruction below for a reference.

Below is a video tutorial to show you an introduction of the wiring harness. It may not be exactly the same as your model but it will be similar to all the models.:



Software Settings:

If you are installing the **aftermarket camera**, you will also need to go to Settings – System – Factory Setting (7890 / 666888) – Reversing Format – Change it to “**CVBS**“, then click “Save and Reboot”.

If it’s the **OEM camera**, you will also need to go to Settings – System – Factory Setting (7890 / 666888) – Reversing Format – Change it to “**VGA**“, then click “Save and Reboot”.

Trouble Shooting:


- 1) Please prepare a voltage tester. Make sure the wire CCD-12 provide 12V power.
- 2) Please make sure the RED wire at the back end of the camera wire (The end that connect to the reverse camera, it comes with RED and BLACK wire.) Since the system provides 12V power from the front to the camera , there should also be 12V power on the RED wire of the camera side.
- 3) Please make sure the Reversing Camera setting is set to “CVBS”.
- 4) Please make sure the camera wire is not damage.

[How to Install Aftermarket FRONT Camera:]

In order to install the front camera, currently we do not have instruction for it.

- 1) You can simply run the wire from the front to the screen, the camera signal can be connected to AUX-V, and
- 2) In order to provide the power to the camera, you can get the power from any of the accessory wire (+12V) in the vehicle. Please don't get the power directly from the unit, you can get the power from the fuse box of the vehicle.
- 3) In order to activate the front camera, you can click on the icon (AUX) from the app list.

Note: The power out put from the unit (CCD-12 / CCD-6) are only for the reverse camera power. The power can only be activated when the car is in reverse, therefore it can't be used for the front camera.

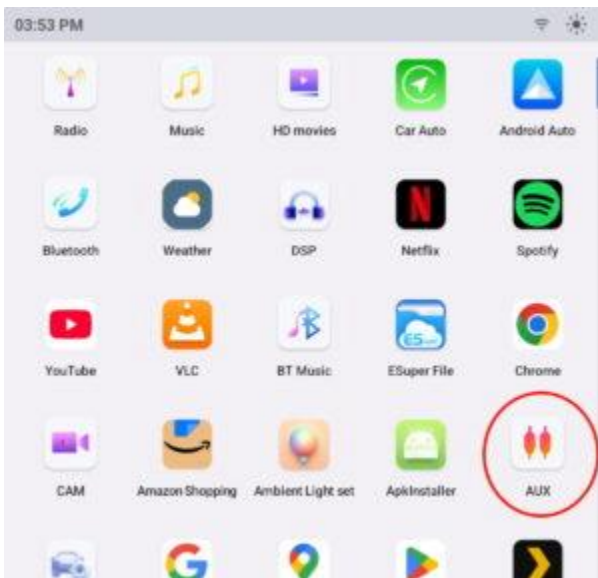

Camera Image & Parking Guideline Settings

Note: In order to switch the left and right mirror image of the camera, you can connect both “WHITE” and “GREEN” wire at the back end of the camera. The white one control the guidance line and the green one control the mirror image of the camera.

At the back of the front camera, you will find two small control wires: WHITE and GREEN. These wires are used to adjust the camera display settings.

WHITE wire – Parking Guidance Lines

This wire controls the on-screen parking guidelines (the colored lines that help estimate distance when parking). Before connecting or disconnecting these wires, please **disconnect the power from the camera first**. After adjusting the wires as needed, you can **reconnect the power to the camera** to apply the change

Connected (Disable Guideline) → Parking guideline lines will appear on the screen.

Disconnected (Enable Guideline) → Parking guideline lines will be disabled.

GREEN wire – Mirror Image (Left/Right Orientation)

This wire controls whether the camera image is displayed in mirror mode or normal mode. Before connecting or disconnecting these wires, please **disconnect the power from the camera first**. After adjusting the wires as needed, you can **reconnect the power to the camera** to apply the change.

Connected (For Front Camera) → The image will be displayed in mirror mode (left and right are reversed).

Disconnected (For Reverse Camera) → The image will be displayed in normal orientation.

Important:

For a front camera, it is usually recommended to enable the mirror mode so the image displays in the correct orientation.

These wires are located near the camera cable at the back end of the camera, and they can simply be connected together or left disconnected to change the settings.

How to install offline Navigation software and APK files:



How to update MCU / Firmware for the system | Android 13 (If applicable):



How to update System Software for the system | Android 13 (If applicable):

