



Fe-56 Semiconductor Equivalent Circuit

14α FCC-14 — $V_R/V_{BR} = 0.030$ — $M = 1.000$ (Small Signal)


A: Inter-Alpha Junction (Unit Cell)

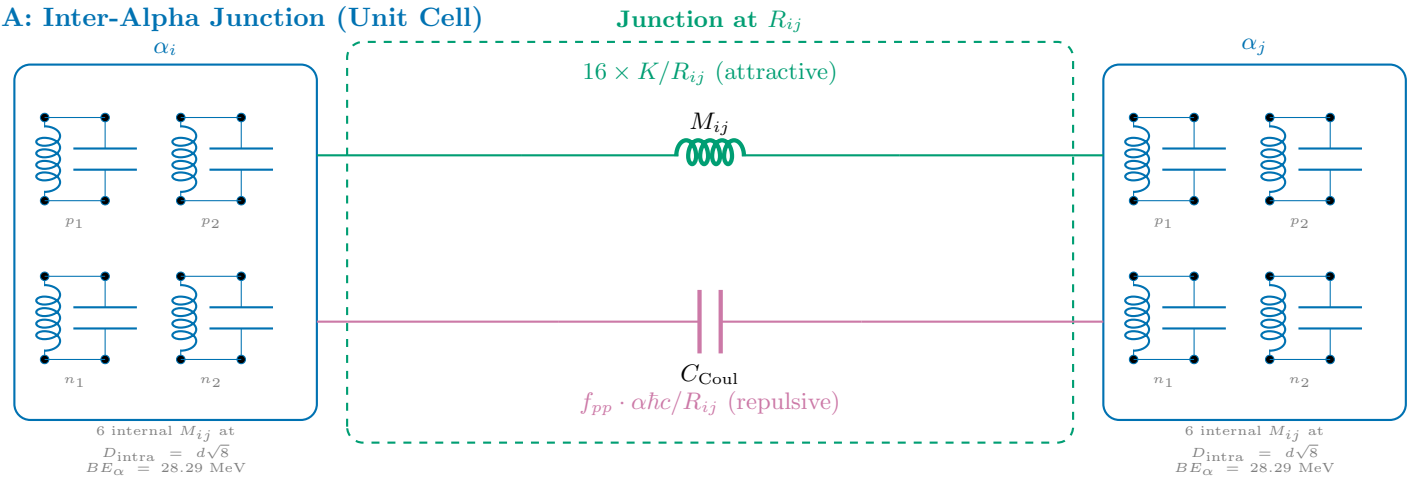

B: Miller Avalanche Stage

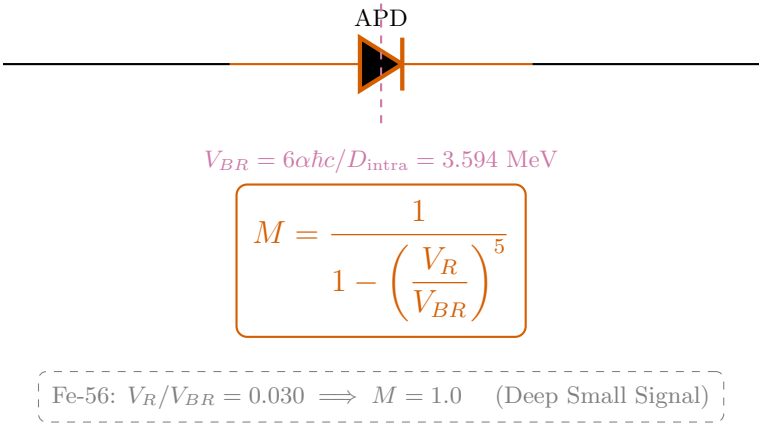

C: Fe-56 Topology (91 junctions)

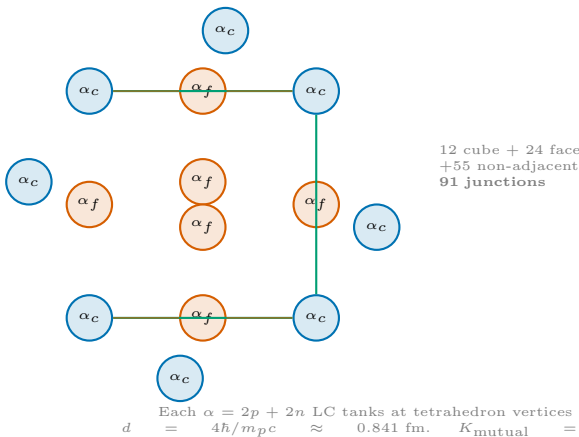

D: Energy Balance

Energy balance equations:

$$M_{\text{nuc}} = 14 M_\alpha - BE_{\text{net}}$$
$$BE_{\text{net}} = \underbrace{\sum_{i < j}^{91} 16 \cdot \frac{K}{R_{ij}}}_{\text{testStrong(attractive)}} - \underbrace{M \cdot \sum f_{pp} \frac{\alpha\hbar c}{R_{ij}}}_{\text{Coulomb (repulsive)}}$$

Strong: $\sum K/R = \text{engine-derived}$
Coulomb: $\sum \alpha\hbar c/R \times f_{pp}$
Miller: $M = 1.000$ ($V_R/V_{BR} = 0.030$)
Result: 52, 103.027 MeV (0.0001% error)