



S-32 Semiconductor Equivalent Circuit

8 α Cube — $V_R/V_{BR} = 0.994$ — $M = 32.800$ (Large Signal)


A: Inter-Alpha Junction (Unit Cell)

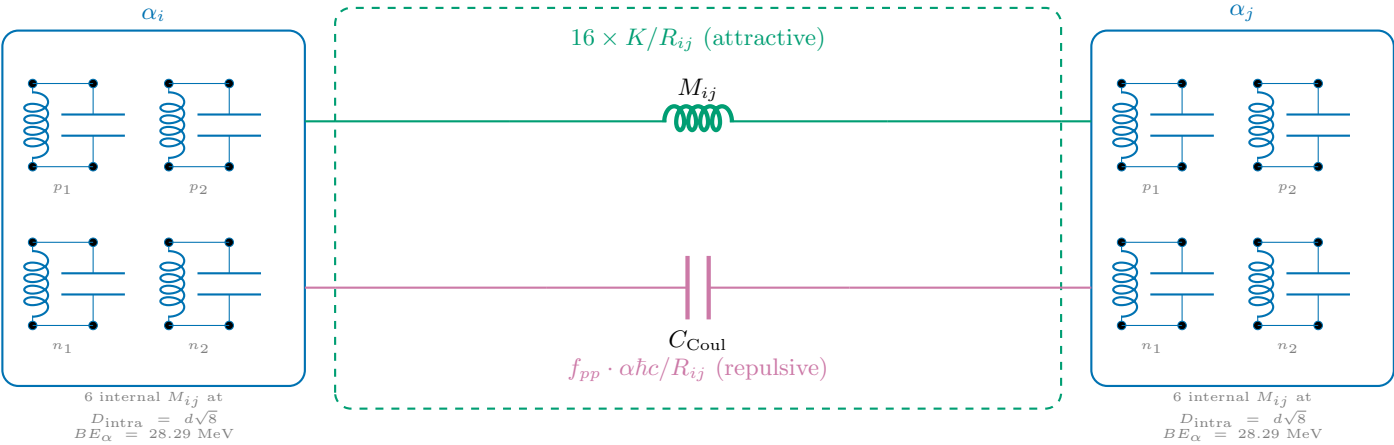

B: Miller Avalanche Stage

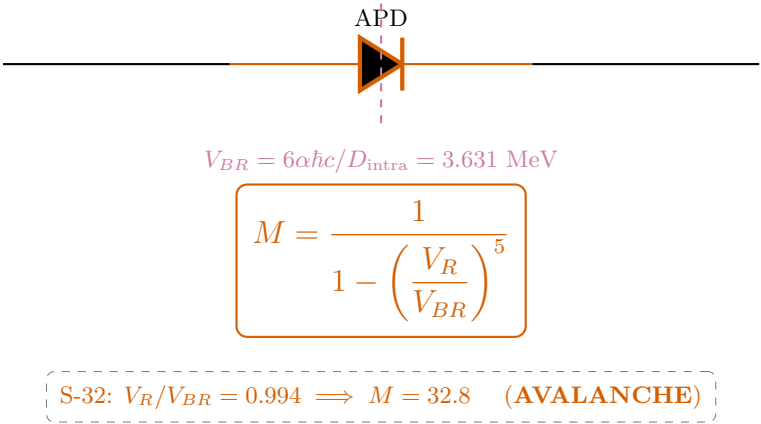

C: S-32 Topology (28 junctions)

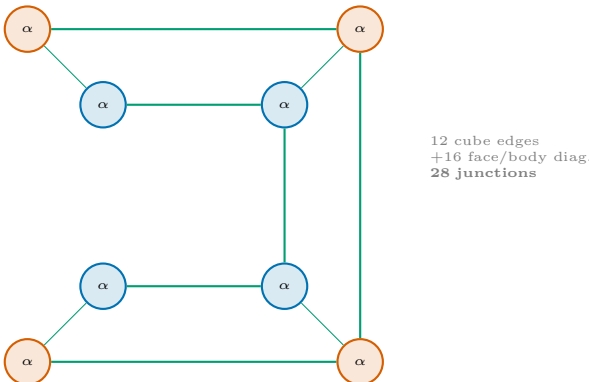

D: Energy Balance

$$M_{\text{nuc}} = 8 M_{\alpha} - BE_{\text{net}}$$

$$BE_{\text{net}} = \underbrace{\sum_{i < j}^{28} 16 \cdot \frac{K}{R_{ij}}}_{\text{testStrong(attractive)}} - \underbrace{M \cdot \sum f_{pp} \frac{\alpha \hbar c}{R_{ij}}}_{\text{Coulomb (repulsive)}}$$

Strong: $\sum K/R$ = engine-derived

Coulomb: $\sum \alpha \hbar c / R \times f_{pp}$

Miller: $M = 32.800$ ($V_R/V_{BR} = 0.994$)

Result: 29,855.525 MeV (0.0000% error)

Each $\alpha = 2p + 2n$ LC tanks at tetrahedron vertices ($D_{\text{intra}} = \frac{d\sqrt{8}}{V_{BR}} \approx \frac{2.38 \text{ fm}}{3.631 \text{ MeV}} = 0.658 \text{ fm}$).
 $d = \frac{4\hbar}{m_p c} \approx 0.841 \text{ fm}$. $K_{\text{mutual}} = 11.34 \text{ MeV} \cdot \text{fm}$.