



Na-23 Semiconductor Equivalent Circuit

$5\alpha + {}^3\text{H}$ Core+Halo — $V_R/V_{BR} = 0.032$ — $M = 1.000$ (Core+Halo)

A: Inter-Alpha Junction (Unit Cell)

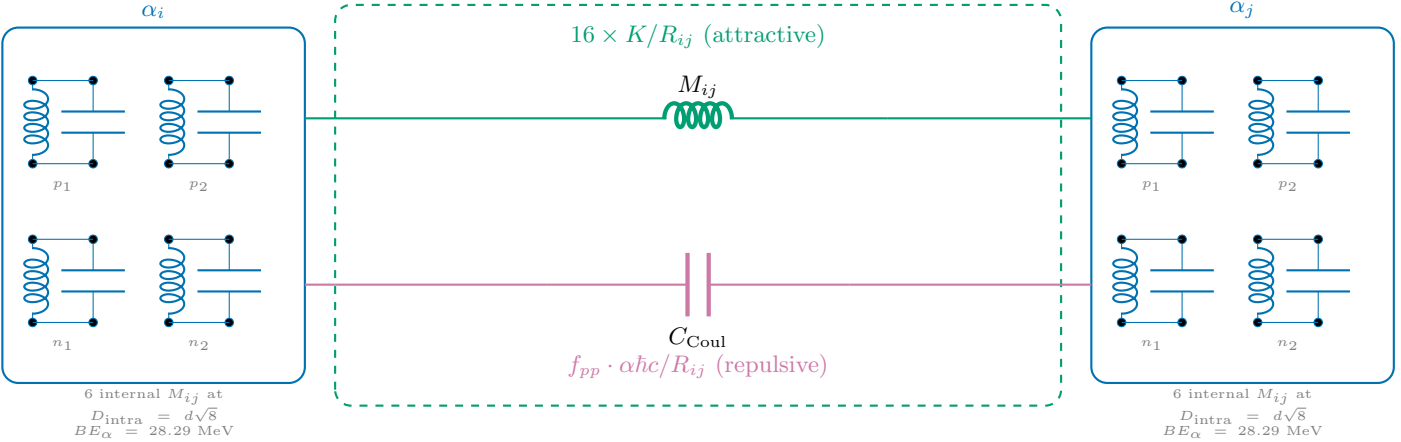


B: Miller Avalanche Stage

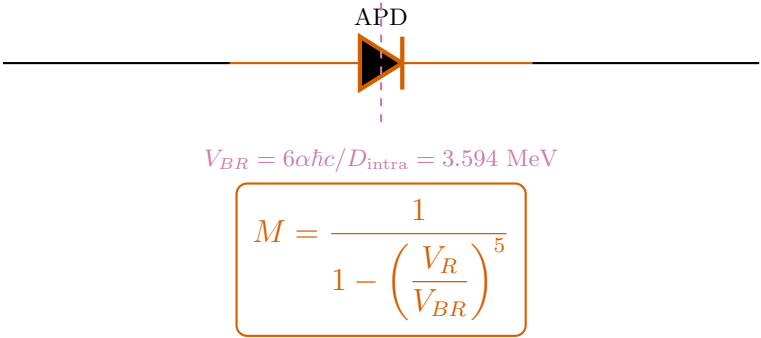

Na-23: Core $V_R/V_{BR} = 0.032 \implies M = 1.0$ (Core inherits parent regime)

C: Na-23 Topology (10 junctions)



D: Energy Balance

$$M_{\text{nuc}} = 5 M_\alpha - BE_{\text{net}}$$
$$BE_{\text{net}} = \underbrace{\sum_{i < j}^{10} 16 \cdot \frac{K}{R_{ij}}}_{\text{testStrong(attractive)}} - \underbrace{M \cdot \sum f_{pp} \frac{\alpha\hbar c}{R_{ij}}}_{\text{Coulomb (repulsive)}}$$

Strong: $\sum K/R$ = engine-derived

Coulomb: $\sum \alpha\hbar c/R \times f_{pp}$

Miller: $M = 1.000$ ($V_R/V_{BR} = 0.032$)

Result: 21,409.214 MeV (0.0000% error)

Each $\alpha = 2p + 2n$ LC tanks at tetrahedron vertices ($D_{\text{intra}} = d\sqrt{8} \approx 2.38$ fm).
 $d = 4\hbar/m_p c \approx 0.841$ fm. $K_{\text{mutual}} = 11.34$ MeV·fm. $V_{BR} = 3.594$ MeV.