WIDGET LUA SCRIPT for XICOY HUBPRO or ADAPTATER TELEX
for ETHOS 1.6.4 or above

Delete all older version of any Xicoy script on the radio

How to install the lua script on the radio ?

Using ETHOS Suite:


- Connect your radio on your computer than start Ethos Suite
- Select LUA Library
- Select the XICOY.ZIP file you have downloaded.

Without ETHOS Suite


- Extract the Zip files in the scripts folder on the radio.

How to set and configure the script installed ?


- Remove All sensors in the telemetry screen.

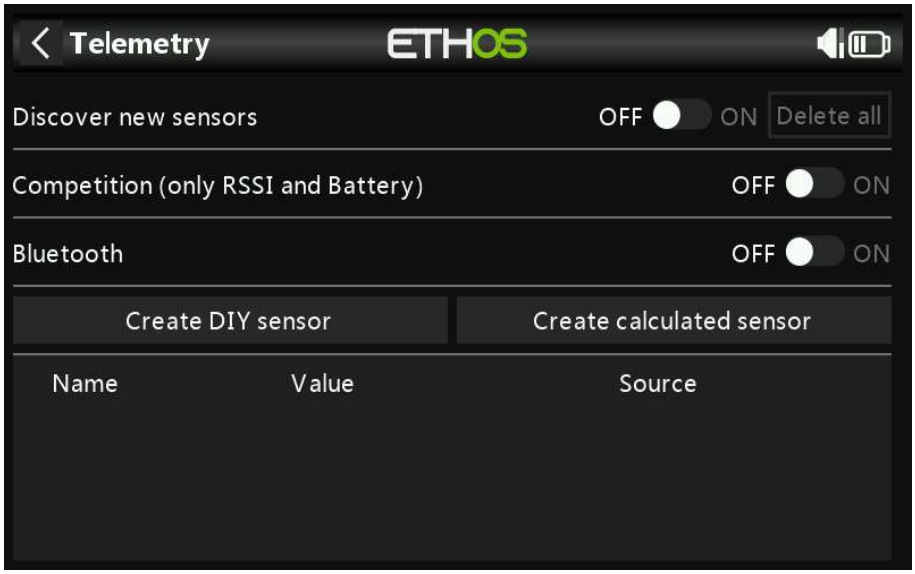


- Add a new screen using the full screen layout

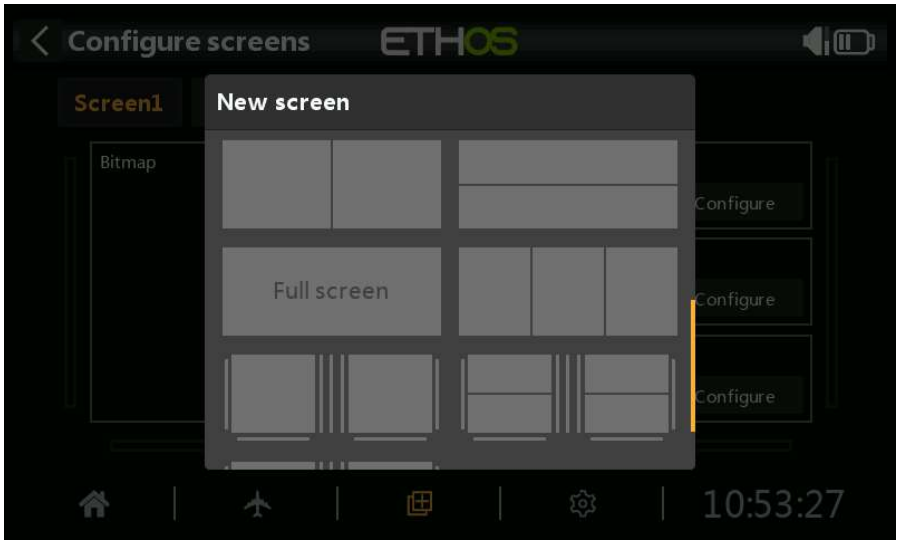

- Select the XICOY widget within the list available
- Configure the XICOY parameters according to your turbine and Xicoy adapter (default ID for HUBPRO is 12 and for the teleX adapter is 28)

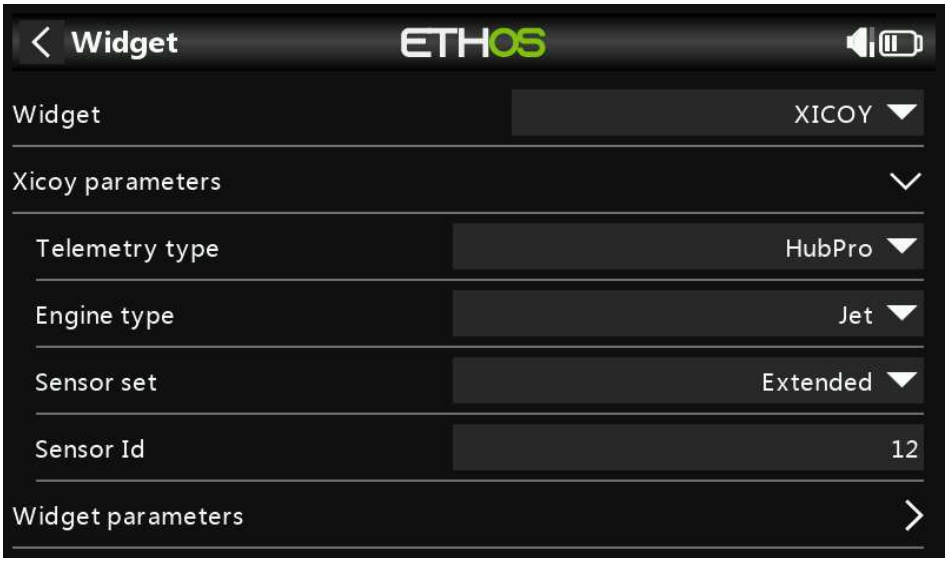

- Configure the widget parameters with the same tank capacity value configured in the HUBPRO or TeleX adapter. Select a voice announce for the fuel low level warnig and a switch if you want during the flight to listen to the fuel remaining.

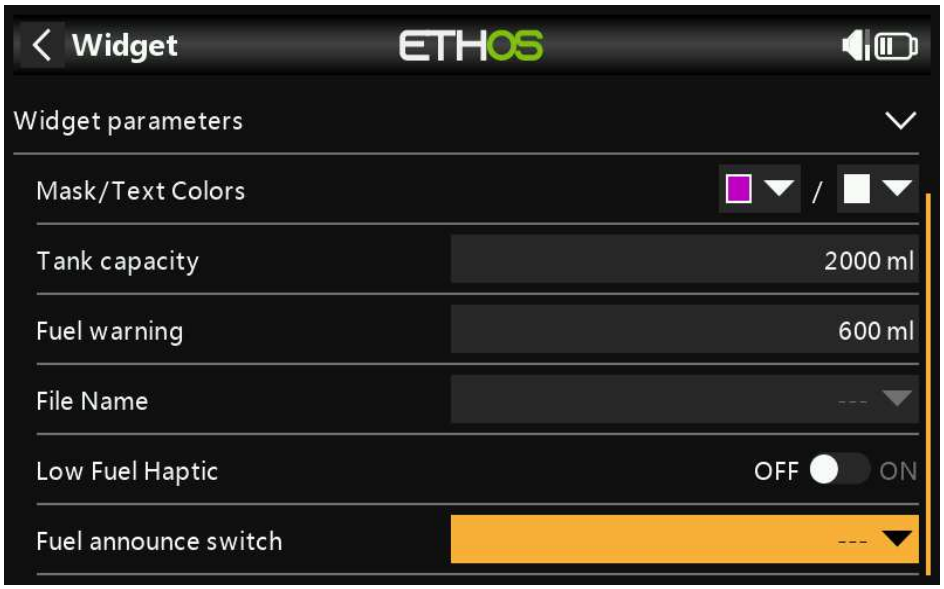

- Back to the main screen, let's check if all sensors has been added automaticaly in the telemetry screen.

- If you need to change any Sensor set or telemetry type or turbine type, the best is to start from the begining of this procedure.



- Let's go back and then Enjoy (example with HUBPRO in extended configuration with the fuel gauge on the right side)

