# Real-time EEG-based Emotion Recognition and its Applications

Yisi Liu, Olga Sourina, and Minh Khoa Nguyen

Nanyang Technological University
Singapore
{LIUY0053,EOSourina,RaymondKhoa}@ntu.edu.sg

**Abstract.** Since emotions play an important role in the daily life of human beings, the need and importance of automatic emotion recognition has grown with increasing role of human computer interface applications. Emotion recognition could be done from the text, speech, facial expression or gesture. In this paper, we concentrate on recognition of "inner" emotions from electroencephalogram (EEG) signals. We propose real-time fractal dimension based algorithm of quantification of basic emotions using Arousal-Valence emotion model. Two emotion induction experiments with music stimuli and sound stimuli from International Affective Digitized Sounds (IADS) database were proposed and implemented. Finally, the real-time algorithm was proposed, implemented and tested to recognize six emotions such as fear, frustrated, sad, happy, pleasant and satisfied. Real-time applications were proposed and implemented in 3D virtual environments. The user emotions are recognized and visualized in real time on his/her avatar adding one more so-called "emotion dimension" to human computer interfaces. An EEG-enabled music therapy site was proposed and implemented. The music played to the patients helps them deal with problems such as pain and depression. An EEG-based web-enable music player which can display the music according to the user's current emotion states was designed and implemented.

**Keywords:** emotion recognition, EEG, emotion visualization, fractal dimension, HCI, BCI

## 1 Introduction

Nowadays, new forms of human-centric and human-driven interaction with digital media have the potential of revolutionising entertainment, learning, and many other areas of life. Since emotions play an important role in the daily life of human beings, the need and importance of automatic emotion recognition has grown with an increasing role of human computer interface applications. Emotion recognition could be done from the text, speech, facial expression or gesture. Recently, more researches were done on emotion recognition from EEG [6, 18, 27, 28, 33, 43]. Traditionally, EEG-based technology has been used in medical applications. Currently, new wireless headsets that meet consumer criteria

for wearability, price, portability and ease-of-use are coming to the market. It makes possible to spread the technology to the areas such as entertainment, e-learning, virtual worlds, cyberworlds, etc. Automatic emotion recognition from EEG signals is receiving more attention with the development of new forms of human-centric and human-driven interaction with digital media. In this paper, we concentrate on recognition of the "inner" emotions from EEG signals as humans could control their facial expressions or vocal intonation.

There are different emotion classifications proposed by researchers. We follow two-dimensional Arousal-Valence model [38]. This model allows mapping of the discrete emotion labels to the Arousal-Valence coordinate system. One of emotion definitions is as follows: "The bodily changes follow directly the perception of the exciting fact, and that our feeling of the changes as they occur is the emotion" [20]. Our hypothesis is that the feeling of changes can be noticed from EEG as fractal dimension changes. We focused on study of fractal dimension model and algorithms, and proposed a fractal based approach to emotion recognition.

To evoke emotions, different stimuli could be used: visual, auditory, and combined. They activate different areas of the brain. Our hypothesis is that emotions have spatio-temporal location. There is no easily available benchmark databases of EEG labeled with emotions. But there are labeled databases of audio stimuli for emotion induction - International Affective Digitized Sounds (IADS) [8] and visual stimuli - International Affective Picture System (IAPS) [26]. Thus, we proposed and carried out one experiment on emotion induction using IADS database of labeled audio stimuli. We also proposed and implemented an experiment with music stimuli to induce emotions by playing music pieces. Both experiments were carried out with prepared questionnaires for the participants to label the recorded EEG with the corresponding emotions.

There are a number of algorithms for recognizing emotions. The main problem of such algorithms is a lack of accuracy. Research is needed to be carried out to evaluate different algorithms and propose algorithms with the improved accuracy. As emotion recognition is a new area, a benchmark database of EEG signals for different emotions is needed to be set up, which could be used for further research on EEG-based emotion recognition. Until now, only limited types of emotions could be recognized. Research could be done on more types of emotions recognition. Additionally, most of the emotion recognition algorithms were developed for off-line data processing. In our paper, we target on real-time emotion recognition and its applications. The user emotions are recognized and visualized in real time on his/her avatar. We add one more so-called "emotion dimension" to human computer interfaces. Also an EEG-based music therapy and a music player are implemented with our real-time emotion recognition algorithm. Although in this paper, we describe standalone implementations of emotion recognition and its applications, it could be easily extended for further use in collaborative environments/cyberworlds.

In Section 2.1, review on emotion classification is given. In Section 2.2, emotion induction experiments are introduced. In Section 2.3, emotion recognition algorithms from EEG are reviewed. In Section 2.4, a fractal dimension algorithm

proposed by Higuchi is described. Our approach, emotion induction experiments, a novel fractal-based emotion recognition algorithm, data analysis and results are given in Section 3. Real-time emotion recognition and visualization of human emotions on 3D avatar using Haptek system [2], the EEG-based music therapy and the EEG-based music player are described in Section 4. In Section 5, conclusion and future work are given.

## 2    Related Works

### 2.1    Emotion Classification

There are different emotion classification systems. The taxonomy can be seen from two perspectives: dimensional and discrete one [32]. Plutchik defines eight basic emotion states: anger, fear, sadness, disgust, surprise, anticipation, acceptance and joy. All other emotions can be formed by these basic ones, for example, disappointment is composed of surprise and sadness [36]. Another approach towards emotion classification is advocated by Paul Ekman. He revealed the relationship between facial expressions and emotions. In his theory, there are six emotions associated with facial expressions: anger, disgust, fear, happiness, sadness, and surprise. Later he expanded the basic emotion by adding: amusement, contempt, contentment, embarrassment, excitement, guilt, pride in achievement, relief, satisfaction, sensory pleasure, and shame [13].

From the dimensional perspective, the most widely used one is the bipolar model where arousal and valence dimensions are considered. This emotion classification approach is advocated by Russell [38]. Here, the arousal dimension ranges from not aroused to excited, and the valence dimension ranges from negative to positive. Another fundamental dimension is an approach-withdrew dimension which is based on the motivating aspects of the emotion [32]. For example, in this theory, anger is an approach motivated emotion in some cases, as it could encourage the person to make effort to change the situation.

The dimensional model is preferable in emotion recognition experiments due to the following advantage: dimensional model can locate discrete emotions in its space, even when no particular label can be used to define a certain feeling [10, 32].

### 2.2    Emotion Induction Experiments

In order to obtain affective EEG data, experiments are carried out with different kinds of stimuli such as audio, visual, and combined ones to induce emotions.

Among the EEG-based emotion recognition works which implemented experiments using audio stimuli to collect EEG data, there are some works where subjects' emotions were elicited by pre-labeled music with emotions. For example, in [28], it was reported that emotions were induced in 26 subjects by pre-assessed music pieces to collect EEG data. A 90% classification accuracy rate was received to distinguish four kinds of emotions: joy, anger, sadness and

pleasure. 32 channels were used, and a Multiclass Support Vector Machine was applied for the classification.

Another types of audio stimuli used in works on emotion recognition from EEG are retrieved from the labeled databases of audio stimuli, IADS database. For example, in [6], four kinds of emotion states including positive/aroused, positive/calm, negative/calm and negative/aroused were induced by sounds clips from IADS. The Binary Linear Fisher's Discriminant Analysis was employed to do the classification. They achieved 97.4% maximum rate for arousal levels recognition and 94.9% maximum rate for valence levels with Fpz and F3/F4 channels.

For experiments using visual stimuli, IAPS is a preferred choice. [6] also selected pictures from IAPS, however, it was reported that the EEG data collected with visual stimuli experiments are more difficult to classify. eNTERFACE project described in [42] established an EEG database using pictures selected from IAPS as stimuli, and 3 emotional states were elicited as follows: exciting positive, exciting negative, and calm state. Though this project did not target emotion recognition from EEG signals, they published EEG data labeled with emotions that were cited by other works on EEG-based emotion recognition as a benchmark. For example, [22] combined correlation dimension with statistical features which improved the results from 66.6% to 76.66%. [43] also used IAPS and it was reported that valence level was recognized with 62.07% accuracy. Another form of visual stimuli that was used in [35] employed a Mirror Neuron System. Pictures of affective facial expressions were used.

Combined stimuli were used in [51]. Films were selected to be the stimuli in that work.

### 2.3   Emotion Recognition Algorithms

There are an increasing number of researches done on EEG-based emotion recognition algorithms. In [28], short-time Fourier Transform was used to calculte the power difference between 12 symmetric electrodes pairs with 6 different EEG waves for feature extraction and Support Vector Machine (SVM) approach was employed to classify the data into different emotion modes. The result was 90.72% accuracy to distinguish the feelings of joy, sadness, anger and pleasure. A performance rate of 92.3% was obtained in [6] using Binary Linear Fisher's Discriminant Analysis and emotion states among positive/arousal, positive/calm, negative/calm and negative/arousal were differentiated. SVM was applied in [18] for emotion classification with the accuracy for valence and arousal identification as 32% and 37% respectively. By applying lifting based wavelet transforms to extract features and Fuzzy C-Means clustering to do classification, sadness, happiness, disgust, and fear were recognized in [33]. In [43], optimization such as different window sizes, band-pass filters, normalization approaches and dimensionality reduction methods were investigated, and it achieved an increase in accuracy from 36.3% to 62.07% by SVM after applying these optimizations. Three emotion states: pleasant, neutral, and unpleasant were distinguished. By

using Relevant Vector Machine, differentiation between happy and relaxed, relaxed and sad, happy and sad with a performance rate around 90% was obtained in [27].

Although the number of researches done on EEG-based emotion recognition algorithms in recent years has been increasing, EEG-based emotion recognition is still a new area of research. The effectiveness and the efficiency of these algorithms, however, are somewhat limited. Some unsolved issues in current algorithms and approaches are listed as follows:

1. Time constrains. The performance time consists from the time of feature extraction and time of classification. The number of electrodes used in the emotion recognition puts another time constrain on the algorithms. As a result, to our best knowledge, most of the algorithms were proposed for off-line emotion recognition.
2. Accuracy. The accuracy of the EEG-based emotion recognition still needs to be improved. The accuracy decreases when more emotions are needed to be recognized.
3. Number of electrodes. From the perspectives of the time to set up the EEG device, the comfort level of the users who wear the device and the amount of features to process, the number of electrodes should be reduced. However, most of the current works still require relatively big number of electrodes. For example, 16 channels were used in [43], and more than 32 channels were used in [11, 12, 28].
4. Number of the recognized emotions. Although there are varieties of emotional states to describe the human's feelings, until now only limited types of emotions can be recognized using EEG. The best performance obtained was reported in [35] where 3 channels were used and 83.33% maximum accuracy was achieved for differentiating 6 emotions.
5. Benchmark EEG affective databases. So far, a very few benchmark EEG databases with labeled emotions are available. EEG affective databases with different stimuli such as visual and audio are needed to be set up for future researches.

Additionally, as the brain is a complicated system, the EEG signal is nonlinear and chaotic [23, 24]. However, little has been done to investigate chaos of brain for emotion recognition. [6, 18, 27, 28, 33, 43] were based on linear analysis, however, linear analysis such as Fourier Transform only preserves the power spectrum in the signal, but destroys the spike-wave structure [49].

A fractal dimension analysis is suitable for analyzing nonlinear systems and could be used in real-time EEG signal processing [4, 29]. Early work such as [37] showed that fractal dimension could reflect the change of EEG signal; [30] showed that fractal dimension varied for different mental tasks; a more recent work like [24] revealed that when brain processed tasks which were of emotional difference only, fractal dimension can be used to differentiate these tasks. [44, 46] used music as stimuli to elicit emotions, and applied fractal dimension for the analysis of the EEG signal. [47, 52] applied fractal dimension to detect the concentration level of the subjects and developed EEG-based "serious" games. All

these works show that fractal dimension is a potentially promising approach to investigate EEG-based emotion recognition. In our research, fractal dimension model is explored to provide better accuracy and performance in EEG-based emotion recognition.

### 2.4  Fractal Dimension Model

For calculation of fractal dimension value, we implemented and analyzed two well-known algorithms: box-counting [5] and Higuchi [17]. Both of them were evaluated using Brownian and Weierstrass functions where "true value" is known [31]. Higuchi algorithm was chosen to process the data since it gave a better accuracy as it was closer to the theoretical FD values [53] and it outperformed in the processing of EEG data [45].

Let us describe the Higuchi algorithm as we apply it for FD calculation in our proposed fractal-based emotion recognition algorithm shown in Section 3.

Let $X(1), X(2), \ldots, X(N)$ be a finite set of time series samples, the new time series is constructed as follows:

$$X_k^m : X(m), X(m+k), X(m+2k), \ldots, X(m + [\frac{N-m}{k}] \cdot k) \ . \tag{1}$$

where $m = 1, 2, \ldots, k$, $m$ is the initial time and $k$ is the interval time.

Then, $k$ sets of $L_m(k)$ are calculated as follows:

$$L_m(k) = \frac{\left\{ (\sum_{i=1}^{[\frac{N-m}{k}]} |X(m+ik) - X(m + (i-1) \cdot k)|) \frac{N-1}{[\frac{N-m}{k}] \cdot k} \right\}}{k} \ . \tag{2}$$

$\langle L(k) \rangle$ denotes the average value over $k$ sets of $L_m(k)$ and the relationship exists as follows:

$$\langle L(k) \rangle \propto k^{-D} \ . \tag{3}$$

Finally, the fractal dimension can be obtained by logarithmic plotting between different $k$ and its associated $\langle L(k) \rangle$ [17].

## 3    Fractal Dimension Based Approach to Emotion Recognition

In this paper, we proposed a fractal dimension based approach to EEG-based emotion recognition. First, we designed and implemented emotion induction experiments using two-dimensional model to describe emotions. Then, we analyzed EEG recordings with Higuchi algorithm and our proposed algorithm for online emotion recognition.

### 3.1   Emotion Induction Experiments

As we mentioned in Introduction, there is no easily available benchmark database of EEG recordings with labeled emotions. We designed two experiments to elicit emotions with audio stimuli. Five truncated songs which lasted for 1 minute each were used in Experiment 1. The following music was chosen for the targeted emotions: "Wish to Wish" (S.E.N.S) for negative/low aroused (sad), "Cloud Smile" (Nobue Uematsu) for positive/low aroused (pleasant), "A Ghost in the Machine" (Angelo Badalamenti) for negative/high aroused (fear), "William Tell Overture: Finale" (Gioachino Rossini) for positive/high aroused (happy) and "Disposable Hero" (Metallica) for negative/high aroused (angry). 10 participants, 2 female and 8 male students whose ages ranged from 23 to 35, participated in the music experiment.

Sound clips selected from the International Affective Digitized Sounds (IADS) were used in Experiment 2. All the sounds in the IADS database are labeled with their arousal and valence values. IADS provides a set of standardized sound stimuli to evoke emotions that could be described by Arousal-Valence model. For example, positive valence and high arousal values define happy emotion. 27 clips were chosen to induce five emotional states: 3 clips for neutral with mean arousal ratings ranging between 4.79 and 5.15, mean valence rating ranging from 4.83 to 5.09; 6 clips for each of positive/low aroused, positive/high aroused, negative/low aroused and negative/high aroused emotions with mean arousal rating ranging between 3.36 and 4.47; 6.62 and 7.15; 3.51 and 4.75; 7.94 and 8.35 respectively, and mean valence rating ranging between 6.62 and 7.51; 7.17 and 7.90; 4.01 and 4.72; 1.36 and 1.76 respectively. 12 subjects, 3 female and 9 male students whose ages ranged from 22 to 35, participated in the sound experiment. None of the subjects participated in both experiments had history of mental illness.
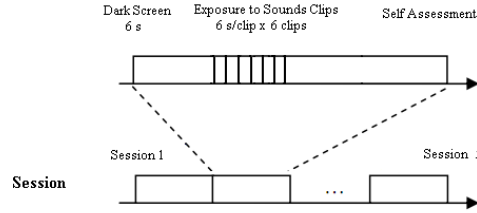
The procedures for both experiments are described as follows. After a participant was invited to the project room, he/she was briefly introduced to the experiment protocol and the usage of self-assessment questionnaire. Then, the participant was seated in front of the computer which played the audio stimuli. He/she was required to keep still and eyes closed during experiment sessions to avoid muscle movement and eye blinking artifacts.

As shown in Fig. 1, Experiment 1 was consisted from five sessions. Each session targeted one type of emotions. There was a 60 seconds silent period at the beginning of each session for the subject to calm down and get ready for the session. After that, one piece of music truncated to 1 minute duration was played to the subject.

For Experiment 2 using stimuli from IADS, 5 sessions, namely: session 1 - neutral, session 2 - positive/low aroused, session 3 - positive/high aroused, session 4 - negative/low aroused, session 5 - negative/high aroused were prepared as shown in Fig. 2. In each session, there was a 6 seconds' silent break, then 6 clips of IADS stimuli aiming at one particular emotion were played to the subjects. For neutral state, since only three sounds clips were available, each clip was played twice in order to keep the same interval of each session.
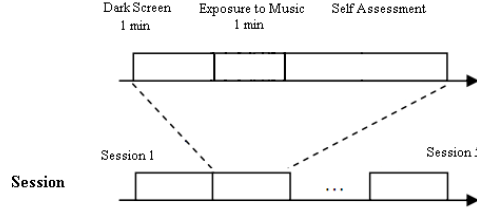
**Fig. 1.** The procedure of music experiment.



**Fig. 2.** The procedure of IADS experiment.

For both experiments, the subjects needed to complete the questionnaire after listening to music/sounds. In the questionnaire, the Self-Assessment Manikin (SAM) technique [7] with two dimensions: arousal and valence and five levels indicating the intensity of both dimensions, was employed for emotion state measurement. Additionally, the subjects were asked to write down their feelings in a few words such as happy, sad, etc.

Emotiv wireless headset [1] was used for carrying out experiments. Emotiv device has 14 electrodes locating at AF3, F7, F3, FC5, T7, P7, O1, O2, P8, T8, FC6, F4, F8, AF4 (CMS/DRL as references) following the American Electroencephalographic Society Standard [3]. The sampling rate of the Emotiv headset is 128Hz. The bandwidth of the device is 0.2-45Hz, and digital notch filters are at 50Hz and 60Hz. The A/D converter is with 16 bits resolution.

## 3.2   Data Analysis and Results

The data collected in our two experiments using the Emotiv headset were analyzed to find spatio-temporal emotion patterns of high and low arousal level with positive and negative valence level.

In the following analysis, we only focus on the analysis of data with negative/high aroused, positive/high aroused, negative/low aroused, and positive/low aroused labels. Since we have the questionnaires which give us the true reaction of the subjects to the stimuli, we ignore the cases in our processing when the

subjects' feelings were not compatible with the targeted emotions.

A 2 to 42 Hz band-pass filter was applied to the raw data as the major EEG waves (alpha, theta, beta, delta, and gamma) lie in this band [40, 41]. Then, Higuchi fractal dimension algorithm described in section 2.4. was applied for FD values calculations. We implemented the algorithm with a sliding window where the window size was 1024 samples and 99% overlapping was applied to calculate FD values of the filtered data.

In the first experiment using music stimuli, the data from 13th to 24th seconds of recording were processed. In the second experiment using IADS clips, the data from 2nd to the 13th seconds of recording were processed.

The arousal level could be identified from different electrode locations. FC6 was selected for the arousal level recognition as the FD values computed from it gave better arousal difference compared to other channels. The mean of FD values computed from FC6 aiming at recognizing the arousal level for all subjects in music and IADS experiments are shown in Table 1 and Table 2. Two FD values for high arousal level with negative and positive valence, and two FD values for low arousal level with negative and positive valence are presented in the tables as follows: negative high aroused (N/HA), positive high aroused (P/HA), negative low aroused (N/LA), and positive low aroused (P/LA). In Table 1, it is shown that 10 subjects participated in the Music experiment. In Table 2, it is shown that 12 subjects participated in IADS experiment. Based on the self-assessment questionnaires, 46 pairs of comparisons from different subjects between high aroused and low aroused states regardless of the valence level were used. 39/46 (84.9%) showed that the higher arousal was associated with the larger FD values. This phenomenon is illustrated in Table 1 and 2 as the mean of FD values for the high aroused states (N/HA and P/HA) is larger than the low aroused states (N/LA and P/LA). For example, for the subject #1 N/HA value 1.9028 is larger than N/LA value 1.7647 and P/LA value 1.8592, and P/HA value 1.9015 is larger than N/LA value 1.7647 and P/LA value 1.8592. In Table 1 and 2, we denoted the FD value as X if the subject's feeling was different from the targeted emotion by self-assessment questionnaire report. Thus, we eliminated such cases from our analysis.

The asymmetrical frontal EEG activity may reflect the valence level of emotion experienced. Generally, right hemisphere is more active during the experience of negative emotions while left hemisphere is more active during positive emotions. It was found that when one is watching a pleasant movie scene, a greater EEG activity is appeared in the left frontal lobe, and with unpleasant scene, right frontal lobe shows relatively higher EEG activity [21]. Another set of evidence supporting this hypothesis is described in work done by Canli et al. [9]. They used fMRI to investigate the human brain's response to visual stimuli, and got the results that greater left hemisphere activity is shown during the positive picture exposure but greater right hemisphere activity for negative pictures. However, there are also studies such as [25, 34] that oppose this hypothesis.

In our study, the difference between FD values from electrode pair AF3 (left

**Table 1.** Mean FD values for arousal level analysis of music experiment

| Music | Emotion State FD Value | | | |
|---|---|---|---|---|
| | N/HA | P/HA | N/LA | P/LA |
| Subject #1 | 1.9028 | 1.9015 | 1.7647 | 1.8592 |
| Subject #2 | X | 1.9274 | X | 1.9268 |
| Subject #3 | 1.9104 | 1.9274 | 1.7579 | 1.8426 |
| Subject #4 | 1.9842 | 1.956 | 1.8755 | 1.9361 |
| Subject #5 | 1.7909 | 1.8351 | 1.8242 | X |
| Subject #6 | 1.9111 | X | X | 1.9127 |
| Subject #7 | 1.9352 | 1.9231 | 1.9106 | 1.9204 |
| Subject #8 | X | X | X | X |
| Subject #9 | 1.9253 | 1.939 | X | 1.9203 |
| Subject #10 | 1.8507 | 1.8842 | X | 1.8798 |

**Table 2.** Mean FD values for arousal level analysis of IADS experiment

| IADS | Emotion State FD Value | | | |
|---|---|---|---|---|
| | N/HA | P/HA | N/LA | P/LA |
| Subject #1 | 1.8878 | 1.8478 | X | 1.8042 |
| Subject #2 | 1.9599 | 1.922 | 1.938 | 1.8237 |
| Subject #3 | 1.9418 | 1.9507 | 1.9201 | X |
| Subject #4 | 1.9215 | 1.917 | 1.9265 | 1.9118 |
| Subject #5 | 1.7215 | 1.9271 | X | 1.8659 |
| Subject #6 | 1.8898 | 1.8902 | 1.888 | X |
| Subject #7 | X | X | X | X |
| Subject #8 | X | X | X | X |
| Subject #9 | 1.9261 | 1.9241 | 1.7437 | X |
| Subject #10 | 1.9223 | 1.9333 | X | 1.9026 |
| Subject #11 | 1.8796 | 1.8543 | 1.7183 | X |
| Subject #12 | X | X | X | X |

hemisphere) and F4 (right hemisphere) were used to identify valence level and test the lateralization theory. It was found that more stable pattern can be achieved by differentiating valence level within the same arousal level, either high aroused or low aroused. In Fig. 3, a hierarchical scheme we used to distinguish emotions is shown.
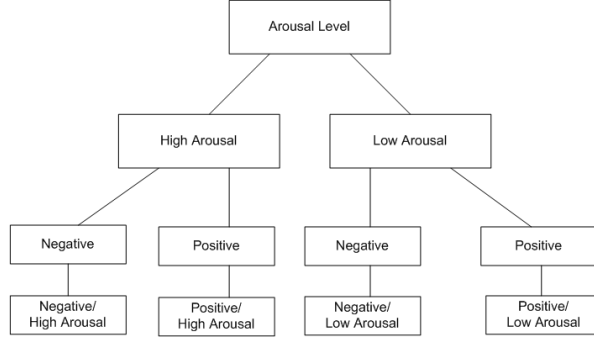


**Fig. 3.** The heriachical scheme of emotion recognition.

The results of the valence level recognition also revealed partial support for the asymmetric frontal hypothesis. Although not all the subjects' dominant hemisphere for positive or negative emotions was the same as expected in the asymmetric hypothesis, the pattern of lateralization for a particular subject was consistent among different experiments with similar arousal level. 10 subjects' data were available for comparison of positive and negative emotion states with similar arousal level. 9/10 (90%) has shown the consistent pattern as follows. For example, one subject's EEG data showed the larger difference between AF3 and F4 FD values for negative emotions than for positive emotions in all experiment trails with different valence levels but similar arousal levels. Five subjects had the larger difference of FD values between left hemisphere and right hemisphere (AF3-F4) during the experiencing of negative emotion, while 4 subjects had the larger difference of FD values when they experienced positive emotions. This phenomenon may indicate that the frontal lateralization exists with individual differences, and it may not be applicable for everyone that the left hemisphere is more active for positive and right hemisphere is more active for negative emotions. It could be opposite for some individuals, and this outcome complies with the conclusion made in [16] that individual difference may affect the processing of emotion by brain.

Based on the result of our analysis, we developed the following real-time emotion recognition algorithm described in the next section.

### 3.3   Real-time Emotion Recognition Algorithm

As it was mentioned in Introduction, we follow two-dimensional Arousal-Valence model described in section 2.1. This model allows the mapping of the discrete emotion labels in the Arousal-Valence coordinate system as shown in Fig. 4.

The advantage of using this model is that we can define arousal and valence levels of emotions with the calculated FD values. For example, the increase in arousal level corresponds to the increase of FD values. Then, by using ranges of arousal and valence level, we could obtain discrete emotions from the model. Finally, any emotion that can be represented in the Arousal-Valence model can be recognized by our emotion recognition algorithm.
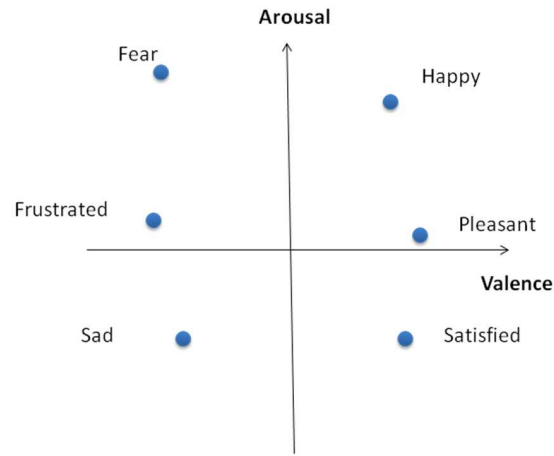


**Fig. 4.** Emotion labels in arousal-valence dimension(Adapted from Russell's circumplex model [39]).
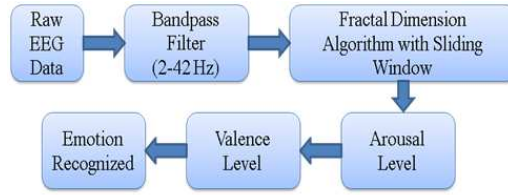
The emotion recognition algorithm for real time is illustrated in Fig. 5. The raw EEG data gathered from AF3, F4 and FC6 are the input to the 2 to 42 Hz band-pass filter. Then, Higuchi fractal dimension algorithm with a sliding window of window size 1024 and 99% overlapping is applied to the filtered data. The benefit of the usage of the sliding window is that it enables real-time processing.

The FD value calculated from FC6 is used to distinguish the arousal level independently by comparing with a default threshold extracted from our experiments' results described in section 3.2. As shown in Fig. 4, the change of FD could be mapped along the arousal axis since our experiments revealed that higher arousal level was associated with larger FD values. Based on this observation, continuous recognition of changing emotion from low arousal to high arousal is enabled. For example, satisfied, pleasant, and happy are all positive emotions but with different arousal levels - ranging from low arousal to high

arousal level, and their corresponding FD values also ranges from small one to large one.

The difference of FD values between left hemisphere and right hemisphere (AF3-F4) is computed simultaneously. After the arousal level has been identified, the valence level of emotions is recognized within the similar arousal level by comparing the difference of FD with another threshold which is set for valence level recognition.

Finally based on the arousal level and valence level, the emotions are mapped into 2D model.



**Fig. 5.** The emotion recognition algorithm overview.

In the algorithm, we set default thresholds for real-time emotion recognition based on the experiments' results. However, because of the existence of individual difference which means the pattern of emotion for one particular subject is consistent but FD values may vary among different subjects, a training session is needed to be introduced in order to improve the accuracy.

The training session scheme is illustrated in Fig. 6. The procedure is similar to the real-time scheme, except the input is EEG data of the labeled emotions of the particular subject. Then, thresholds are calculated and the lateralization pattern is found based on the data collected from the training session for each subject. When the subject wants to use this system after training, the procedure is illustrated as the lower part below the dash line in Fig. 6. The pattern of newly collected EEG data is recognized according to the comparisons with the calculated thresholds obtained from the training session.

## 4   Real-time Applications

The real-time EEG-based emotion recognition can be applied to many fields such as entertainment, education, medicine, etc. In our work, we implemented three applications: an emotional avatar, EEG-based music therapy, and EEG-based music player.
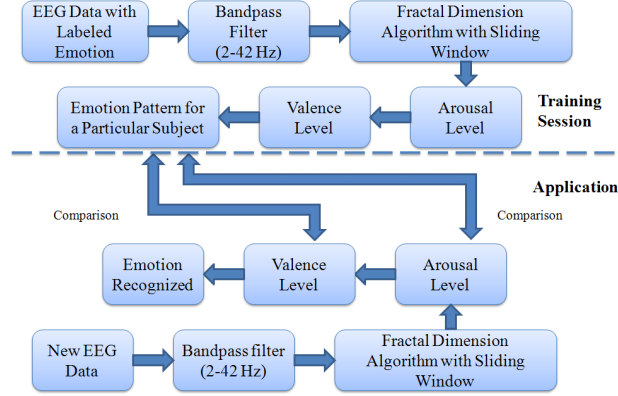
**Fig. 6.** An emotion recognition scheme with training session.
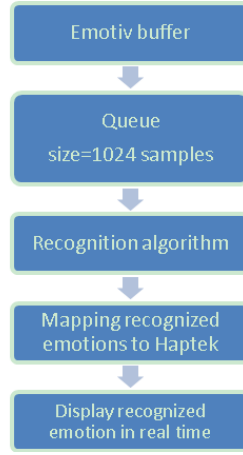
### 4.1  Emotional Avatar

In order to visualize the recognized emotions, we implemented our algorithm with Haptek activex control system [2]. Microsoft Visual C++ 2008 was used in this project. Haptek software is a 3D model with predefined parameters for controlling facial muscles visualization, thereby enables users to create customized emotions and expressions. Haptek supports stand-alone and web-based application.

**Data Acquisition** EEG data are acquired using Emotiv headset at 128 Hz. We used Emotiv Software Development Kit for acquiring raw data from the device. Three out of fourteen Emotiv's channels at locations AF3, F4 and FC6 are fed into the algorithm for the emotion recognition process.

**Data Processing** A data stream from the Emotiv device is stored in a buffer. Every time a read command is triggered, all the samples in the buffer are taken out and the buffer is cleared. Therefore, the number of data obtainable at a time depends on how long the samples have accumulated in the buffer.

The fractal algorithm requires data to be fed in a bunch of 1024 samples at a time for one channel. Therefore, we use a queue to buffer the data from Emotiv's buffer to the algorithm. The queue is refreshed by the current number of samples in Emotiv's buffer every time the read command is triggered as shown in Fig. 7. In the algorithm, those obsolete values in the queue are replaced by latest values in the Emotiv buffer at the time.

**Emotion Mapping to Haptex** Haptek Activex control provides functions and commands to change facial expressions of 3D avatars. We used an avatar available with version of Haptek development package [2]. The face of the avatar

**Fig. 7.** Implementation process of the emotional avatar application.

can be changed according to the photo image of the user's face. We defined six emotions by changing the parameters controlling the facial muscles of the Haptek emotional avatar. Those emotions are: fear, frustrated, sad, happy, pleasant and satisfied. The above emotions can be recognized by the proposed emotion recognition algorithm described in the section 3.

For the mapping, arousal and valence levels are transformed into discrete values using thresholds. After this step, arousal level can only take one of the following values 0, 1 or 2 and valence 0 or 1 as shown in Fig. 8. Combination of discrete values of arousal and valence level gives six types of emotions.
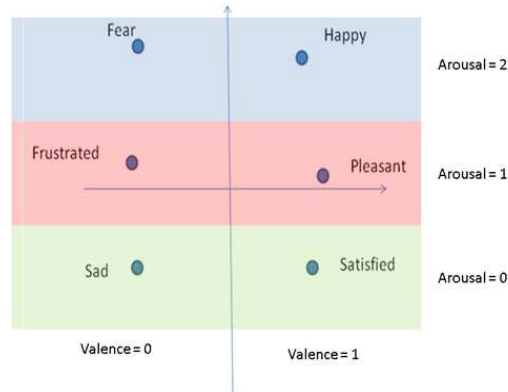


**Fig. 8.** Illustration of discrete arousal and valence levels.

Mapping of discrete values of (Arousal level, Valence level) into 6 emotions is shown in Table 3.

**Table 3.** Mapping of combinations of (Valence, Arousal) and corresponding emotions

| (Valence, Arousal) | Emotion |
|:---:|:---:|
| (0,0) | Sad |
| (0,1) | Frustrated |
| (0,2) | Fear |
| (1,0) | Satisfied |
| (1,1) | Pleasant |
| (1,2) | Happy |

Picture of the user with the Emotiv headset and emotional avatar and pictures of six emotions created using Haptek are shown in Fig. 9 and Fig. 10 respectively.



**Fig. 9.** User with Emotiv headset and emotional avatar.

### 4.2   EEG-based Music Therapy

Music therapy is considered as a nonpharmacological intervention to help the patients deal with the stress, anxiety and depression problems. In [50], the patients reported that their anxiety was released by listening to music during their surgery. [15] also gave a positive support to the effectiveness of the music therapy in the treatment of the patients who suffered from Alzeheimer's disease. Their anxiety level dropped sharply after the music therapy session.
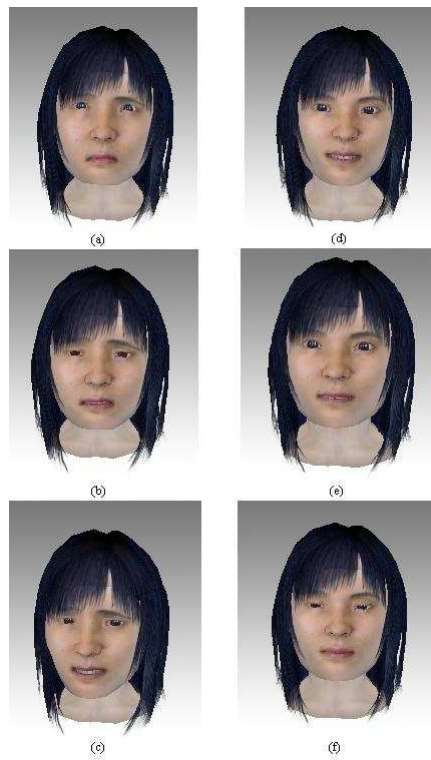
**Fig. 10.** Six visualized emotions with Haptek (a) Fear (b) Frustrated (c) Sad (d) Happy (e) Pleasant (f) Satisfied.

Since music therapy is proved to be a helpful approach in the medical area, we combined it with our real-time EEG-based human emotion recognition algorithm. By this, we can identify the patient's current emotional state and adjust the music therapy based on the patient brain feedback in real time.

The general music therapy can be described as follows. First, the patient needs to choose the type of music therapy such as pain management, depression, etc. Then the corresponding music is selected and played. The emotion state of the patient is continuously checked by his/her EEG in real time, and if the currently playing music does not effectively evoke the targeted emotion of the therapy, the music is changed and another song is played. If the present emotion is in the accordance to the targeted emotion state, the music is played to maintain the target emotion. When a piece of music is over, another piece of music is played.

The length of the music therapy usually lasts from 25 to 40 minutes [14]. In our application, we denote the duration of maintaining the patient in the targeted emotion for one particular music therapy as $t1$. Then, $t1$ is compared with $t$ which is accumulated by the efficient time slices $te_i$ of each music piece played and evoked the targeted emotion in a whole therapy treatment as follows:

$$t = \sum_{i=1}^{n} te_i \ .$$

(4)

where $n$ is the number of the music pieces played in one music therapy, and $te_i$ defines the efficient time slices of all music pieces played during the music therapy. It can be a whole piece of music duration, or only part of a song. For example, music 1 keeps the patient feel positive for 2 minutes, and then, it fails to induce the positive emotion, so it is replaced by music 2. Suppose music 2 is displayed for 4 minutes as it can induce the positive state through that duration. Then, these 2 minutes and 4 minutes time-intervals compose two components in $te_i$ as $te_1 = 2$, $te_2 = 4$, and they are reckoned in $t$. When the constantly accumulating summation of $t$ is larger than $t1$, the music will be stopped, and the end of one music therapy session is reached.

Fig. 11 shows the music therapy website we implemented. For implementation, emotion recognition algorithm is packaged as an ActiveX Component so it can be used in the Internet Explorer environment. Visual C++ was used to integrate the ActiveX Component. The user's "inner" emotion is recognized from the EEG signals in real time. For music therapy on pain management, happy (positive/high aroused) songs are played to the user to distract his/her attention from the pain he/she is suffering. This strategy is compatible with [48] which implemented EEG-based games to switch patient attention from the pain feeling. The user's emotion state is checked in real time by his/her EEG data. If the happy emotion is not evoked by the current song, the player automatically switches to another one. For music therapy dealing with depression, pleasant (positive/low aroused) songs are played to the user to make him/her feel re-

laxed. The song is changed according to the EEG feedback.



**Fig. 11.** Subject is accessing the music therapy website.

### 4.3   EEG-based Music Player

Another application of real-time EEG-based emotion recognition is an EEG-based music player website. In this application, the user's current emotion state is recognized, and then, the corresponding music is played according to the identified emotion. The user's emotion is detected by the algorithm running behind the scene. Songs are categorized into six emotion types: fear, sad, frustrated, happy, satisfied and pleasant.

The design of the player is shown in Fig. 12. Information about the current emotional state of the user and the music being played is given on the display of the player. For example, as shown in Fig. 12, the emotion state is recognized as pleasant, and the music which is categorized as pleasant music is played to the user.

## 5   Conclusion and Future Work

In this paper, emotion classifications, emotion evoking experiments and emotion recognition algorithms were reviewed. We proposed and implemented a novel fractal dimension based algorithm for recognition of emotions from EEG in real time. We implemented our algorithm with Haptek system. The system allows visualization of emotions as facial expressions of personalized avatars in

**Fig. 12.** Subject with EEG-based music player.

3D collaborative environments in real time. We also developed a prototype for an EEG-based music therapy and one EEG-based music player. Compared with other works, our algorithm uses fewer electrodes. We recognized emotions with AF3, F4 and FC6 electrodes, however, for example, in [33] and [43], 63 and 16 electrodes were used respectively. Until now, to our best knowledge there is no real-time EEG-based emotion recognition algorithms reported. We implemented a novel real-time emotion recognition algorithm based on fractal dimension calculation. In this paper, we implemented recognition of six emotions: fear, frustrated, sad, happy, pleasant and satisfied. However, our approach based on FD calculation allows recognize even more emotions that can be defined in 2-dimensional Arousal-Valence model.

Currently, the real-time emotion recognition and its applications are standalone implementations. The next step of the project is an integration of our tools in Co-Spaces on the Web targeting entertainment industry.

Short videos about the emotion recognition algorithm implemented in real time with the Haptex system and the music player, and more information about our project EmoDEx are presented in [19].

# References

1. Emotiv, `http://www.emotiv.com`
2. Haptek, `http://www.haptek.com`

3. American electroencephalographic society guidelines for standard electrode position nomenclature. Journal of Clinical Neurophysiology 8(2), 200–202 (1991)
4. Accardo, A., Affinito, M., Carrozzi, M., Bouquet, F.: Use of the fractal dimension for the analysis of electroencephalographic time series. Biological Cybernetics 77(5), 339–350 (1997)
5. Block, A., Von Bloh, W., Schellnhuber, H.J.: Efficient box-counting determination of generalized fractal dimensions. Physical Review A 42(4), 1869–1874 (1990)
6. Bos., D.O.: EEG-based emotion recognition [online] (2006), `http://hmi.ewi.utwente.nl/verslagen/capita-selecta/CS-Oude_Bos-Danny.pdf`
7. Bradley, M.M.: Measuring emotion: The self-assessment manikin and the semantic differential. Journal of Behavior Therapy and Experimental Psychiatry 25(1), 49–59 (1994)
8. Bradley, M.M., Lang, P.J.: The international affective digitized sounds (2nd edition; IADS-2): Affective ratings of sounds and instruction manual. Tech. rep., University of Florida, Gainesville (2007)
9. Canli, T., Desmond, J.E., Zhao, Z., Glover, G., Gabrieli, J.D.E.: Hemispheric asymmetry for emotional stimuli detected with fMRI. NeuroReport 9(14), 3233–3239 (1998)
10. Chanel, G.: Emotion assessment for affective-computing based on brain and peripheral signals. Ph.D. thesis, University of Geneva, Geneva (2009)
11. Chanel, G., Kierkels, J.J.M., Soleymani, M., Pun, T.: Short-term emotion assessment in a recall paradigm. International Journal of Human Computer Studies 67(8), 607–627 (2009)
12. Chanel, G., Kronegg, J., Grandjean, D., Pun, T.: Emotion assessment: Arousal evaluation using EEG's and peripheral physiological signals (2006)
13. Ekman, P.: Basic emotions. In: Dalgleish, T., Power, M. (eds.) Handbook of Cognition and Emotion. Wiley, New York (1999)
14. Grocke, D.E., Wigram, T.: Receptive Methods in Music Therapy: Techniques and Clinical Applications for Music Therapy Clinicians, Educators and Students. Jessica Kingsley Publishers, 1st edn. (2007)
15. Guetin, S., Portet, F., Picot, M.C., Defez, C., Pose, C., Blayac, J.P., Touchon, J.: Impact of music therapy on anxiety and depression for patients with alzheimer's disease and on the burden felt by the main caregiver (feasibility study). Interets de la musicotherapie sur l'anxiete, la depression des patients atteints de la maladie d'Alzheimer et sur la charge ressentie par l'accompagnant principal 35(1), 57–65 (2009)
16. Hamann, S., Canli, T.: Individual differences in emotion processing. Current Opinion in Neurobiology 14(2), 233–238 (2004)
17. Higuchi, T.: Approach to an irregular time series on the basis of the fractal theory. Physica D: Nonlinear Phenomena 31(2), 277–283 (1988)
18. Horlings, R.: Emotion recognition using brain activity. Ph.D. thesis, Delft University of Technology (2008)
19. IDM-Project: Emotion-based personalized digital media experience in co-spaces (2008), `http://www3.ntu.edu.sg/home/eosourina/CHCILab/projects.html`
20. James, W.: What is an emotion. Mind 9(34), 188–205 (1984)
21. Jones, N.A., Fox, N.A.: Electroencephalogram asymmetry during emotionally evocative films and its relation to positive and negative affectivity. Brain and Cognition 20(2), 280–299 (1992)
22. Khalili, Z., Moradi, M.H.: Emotion recognition system using brain and peripheral signals: Using correlation dimension to improve the results of eeg. In: Proceedings of the International Joint Conference on Neural Networks. pp. 1571–1575 (2009)

23. Kulish, V., Sourin, A., Sourina, O.: Analysis and visualization of human electroencephalograms seen as fractal time series. Journal of Mechanics in Medicine and Biology, World Scientific 26(2), 175–188 (2006)
24. Kulish, V., Sourin, A., Sourina, O.: Human electroencephalograms seen as fractal time series: Mathematical analysis and visualization. Computers in Biology and Medicine 36(3), 291–302 (2006)
25. Lane, R.D., Reiman, E.M., Bradley, M.M., Lang, P.J., Ahern, G.L., Davidson, R.J., Schwartz, G.E.: Neuroanatomical correlates of pleasant and unpleasant emotion. Neuropsychologia 35(11), 1437–1444 (1997)
26. Lang, P., Bradley, M., Cuthbert, B.: International affective picture system (IAPS): Affective ratings of pictures and instruction manual. Tech. rep., University of Florida, Gainesville, FL. (2008)
27. Li, M., Chai, Q., Kaixiang, T., Wahab, A., Abut, H.: EEG emotion recognition system. In: In-Vehicle Corpus and Signal Processing for Driver Behavior, pp. 125–135. Springer US (2009)
28. Lin, Y.P., Wang, C.H., Wu, T.L., Jeng, S.K., Chen, J.H.: EEG-based emotion recognition in music listening: A comparison of schemes for multiclass support vector machine. In: ICASSP, IEEE International Conference on Acoustics, Speech and Signal Processing - Proceedings. pp. 489–492. Taipei (2009)
29. Liu, Y., Sourina, O., Nguyen, M.K.: Real-time EEG-based human emotion recognition and visualization. In: Proc. 2010 Int. Conf. on Cyberworlds. pp. 262–269. Singapore (2010)
30. Lutzenberger, W., Elbert, T., Birbaumer, N., Ray, W.J., Schupp, H.: The scalp distribution of the fractal dimension of the EEG and its variation with mental tasks. Brain Topography 5(1), 27–34 (1992)
31. Maragos, P., Sun, F.K.: Measuring the fractal dimension of signals: morphological covers and iterative optimization. IEEE Transactions on Signal Processing 41(1), 108–121 (1993)
32. Mauss, I.B., Robinson, M.D.: Measures of emotion: A review. Cognition and Emotion 23(2), 209–237 (2009)
33. Murugappan, M., Rizon, M., Nagarajan, R., Yaacob, S., Zunaidi, I., Hazry, D.: Lifting scheme for human emotion recognition using EEG. In: Information Technology, 2008. ITSim 2008. International Symposium on. vol. 2 (2008)
34. Pardo, J.V., Pardo, P.J., Raichle, M.E.: Neural correlates of self-induced dysphoria. American Journal of Psychiatry 150(5), 713–719 (1993)
35. Petrantonakis, P.C., Hadjileontiadis, L.J.: Emotion recognition from EEG using higher order crossings. IEEE Transactions on Information Technology in Biomedicine 14(2), 186–197 (2010)
36. Plutchik, R.: Emotions and life : perspectives from psychology, biology, and evolution. American Psychological Association, Washington, DC, 1st edn. (2003)
37. Pradhan, N., Narayana Dutt, D.: Use of running fractal dimension for the analysis of changing patterns in electroencephalograms. Computers in Biology and Medicine 23(5), 381–388 (1993)
38. Russell, J.A.: Affective space is bipolar. Journal of Personality and Social Psychology 37(3), 345–356 (1979)
39. Russell, J.A.: A circumplex model of affect. Journal of Personality and Social Psychology 39(6), 1161–1178 (1980)
40. Sammler, D., Grigutsch, M., Fritz, T., Koelsch, S.: Music and emotion: Electrophysiological correlates of the processing of pleasant and unpleasant music. Psychophysiology 44(2), 293–304 (2007)

41. Sanei, S., Chambers, J.: EEG signal processing. John Wiley & Sons, Chichester, England ; Hoboken, NJ (2007)
42. Savran, A., Ciftci, K., Chanel, G., Mota, J., Viet, L., Sankur, B., Akarun, L., Caplier, A., Rombaut, M.: Emotion detection in the loop from brain signals and facial images (2006), `http://www.enterface.net/results/`
43. Schaaff, K.: EEG-based emotion recognition. Ph.D. thesis, Universitat Karlsruhe (TH) (2008)
44. Sourina, O., Kulish, V.V., Sourin, A.: Novel tools for quantification of brain responses to music stimuli. In: Proc of 13th International Conference on Biomedical Engineering ICBME 2008. pp. 411–414 (2008)
45. Sourina, O., Liu, Y.: A fractal-based algorithm of emotion recognition from EEG using arousal-valence model. In: Biosignals 2011. Rome, Italy, accepted (2011)
46. Sourina, O., Sourin, A., Kulish, V.: EEG data driven animation and its application. In: 4th International Conference on Computer Vision/Computer Graphics Collaboration Techniques, MIRAGE 2009. vol. 5496 LNCS, pp. 380–388. Rocquencourt (2009)
47. Sourina, O., Wang, Q., Liu, Y., Nguyen, M.K.: A real-time fracal-based brain state recognition from EEG and its application. In: Biosignals 2011. Rome, Italy, accepted (2011)
48. Sourina, O., Wang, Q., Nguyen, M.K.: EEG-based "serious" games and monitoring tools for pain management. In: Proc. MMVR18. Newport Beach, California, accepted (2011)
49. Stam, C.J.: Nonlinear dynamical analysis of EEG and MEG: Review of an emerging field. Clinical Neurophysiology 116(10), 2266–2301 (2005)
50. Stevens, K.: Patients' perceptions of music during surgery. Journal of advanced nursing 15(9), 1045–1051 (1990)
51. Takahashi, K.: Remarks on emotion recognition from multi-modal bio-potential signals. In: Industrial Technology, 2004. IEEE ICIT '04. 2004 IEEE International Conference on. vol. 3, pp. 1138–1143 (2004)
52. Wang, Q., Sourina, O., Nguyen, M.K.: EEG-based "serious" games design for medical applications. In: Proc. 2010 Int. Conf. on Cyberworlds. pp. 270–276. Singapore (2010)
53. Wang, Q., Sourina, O., Nguyen, M.K.: Fractal dimension based algorithm for neurofeedback games. In: Proc. CGI 2010. p. SP25. Singapore (2010)