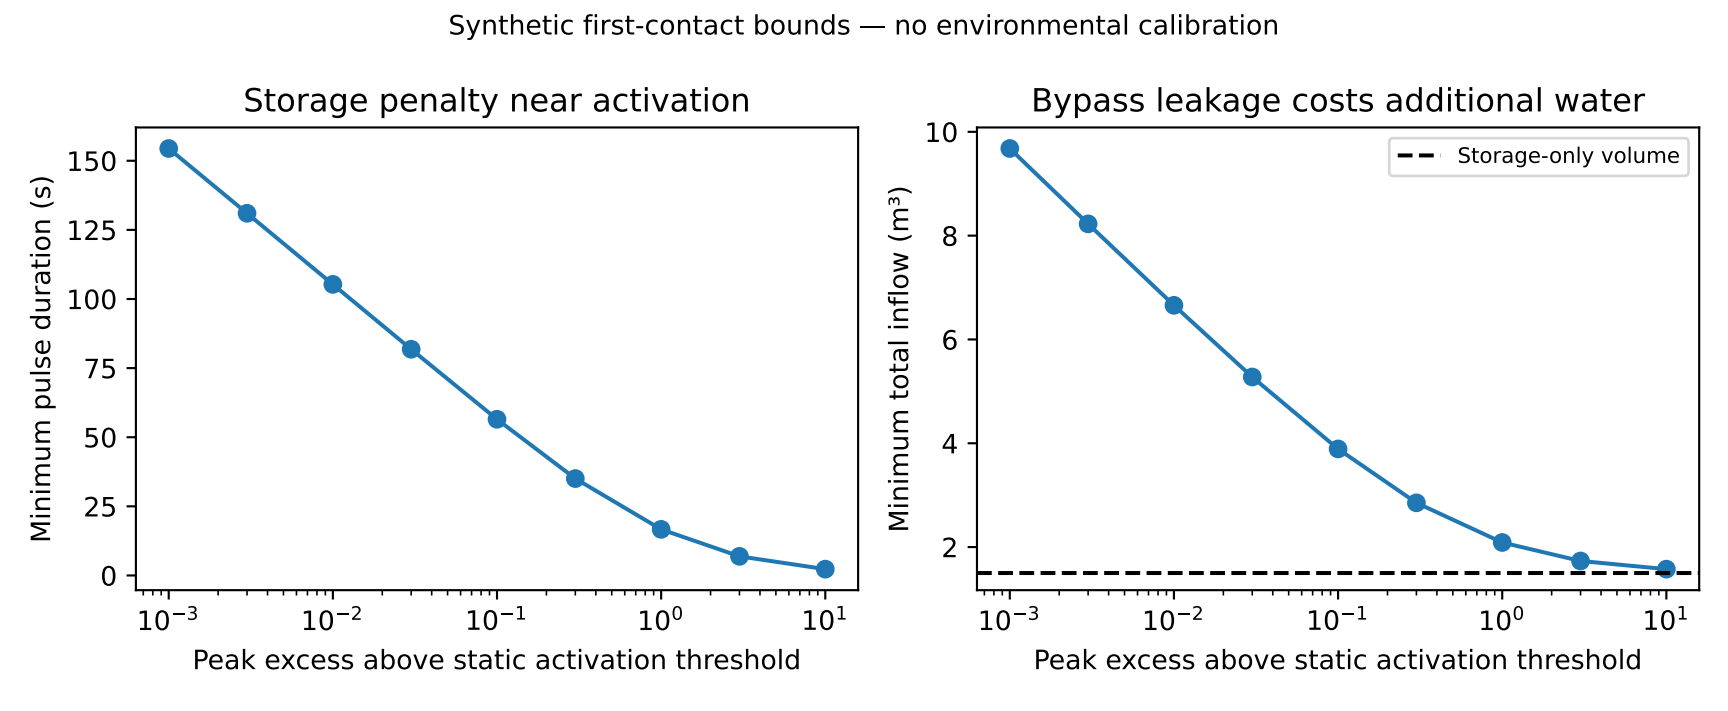
Synthetic first-contact bounds — no environmental calibration
Storage penalty near activation
Minimum pulse duration (s)
150
125
100
75
50
25
0
10^{-3}
10^{-2}
10^{-1}
10^{0}
10^{1}
Peak excess above static activation threshold
Bypass leakage costs additional water
Minimum total inflow (m³)
10
8
6
4
2
Storage-only volume
10^{-3}
10^{-2}
10^{-1}
10^{0}
10^{1}
Peak excess above static activation threshold