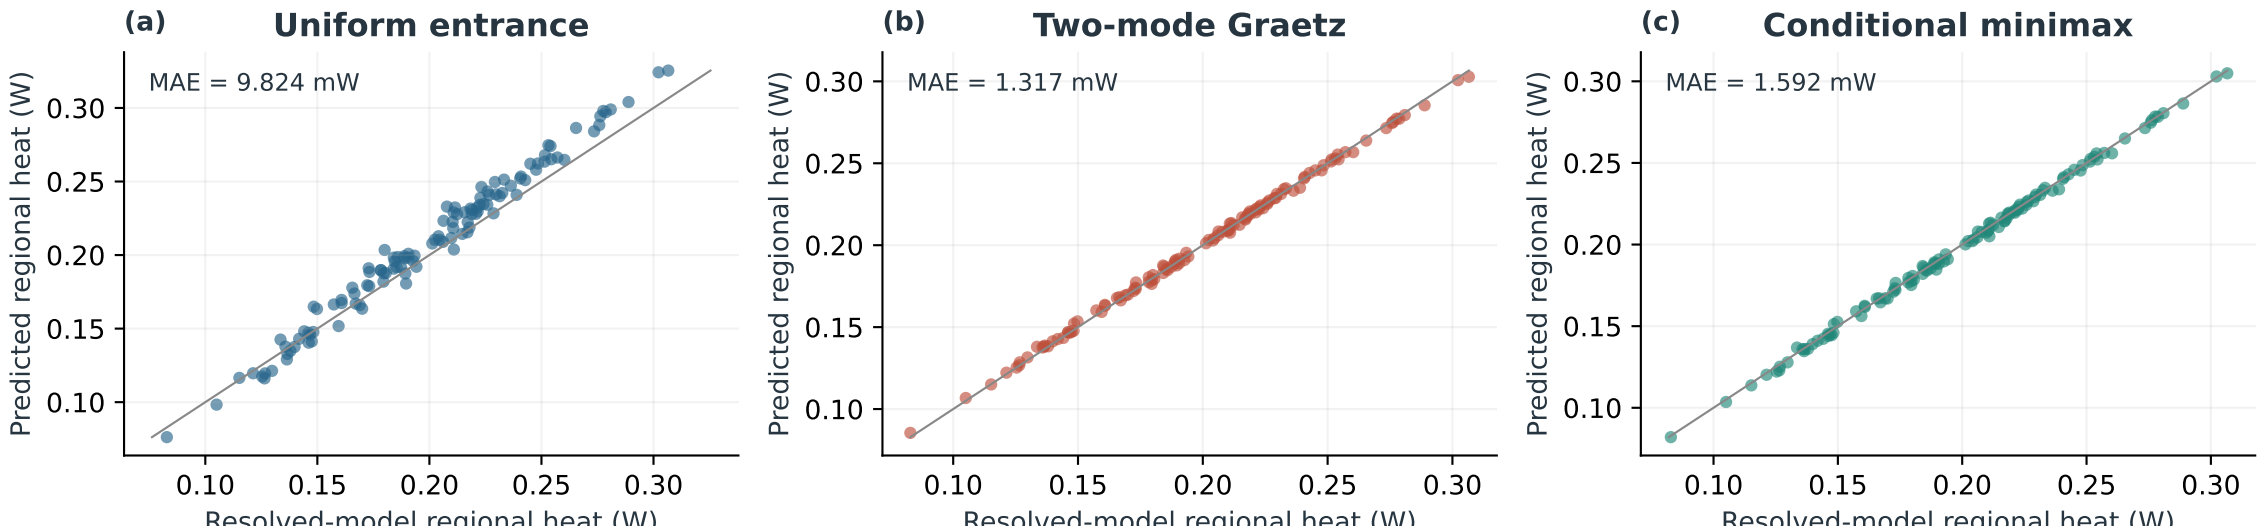
Comparison on 120 seeded smooth admissible inlet profiles
(a)
Uniform entrance
MAE = 9.824 mW
(b)
Two-mode Graetz
MAE = 1.317 mW
(c)
Conditional minimax
MAE = 1.592 mW
Predicted regional heat (W)
Resolved-model regional heat (W)
0.10
0.15
0.20
0.25
0.30
SYNTHETIC FIXED-FLOW MODEL