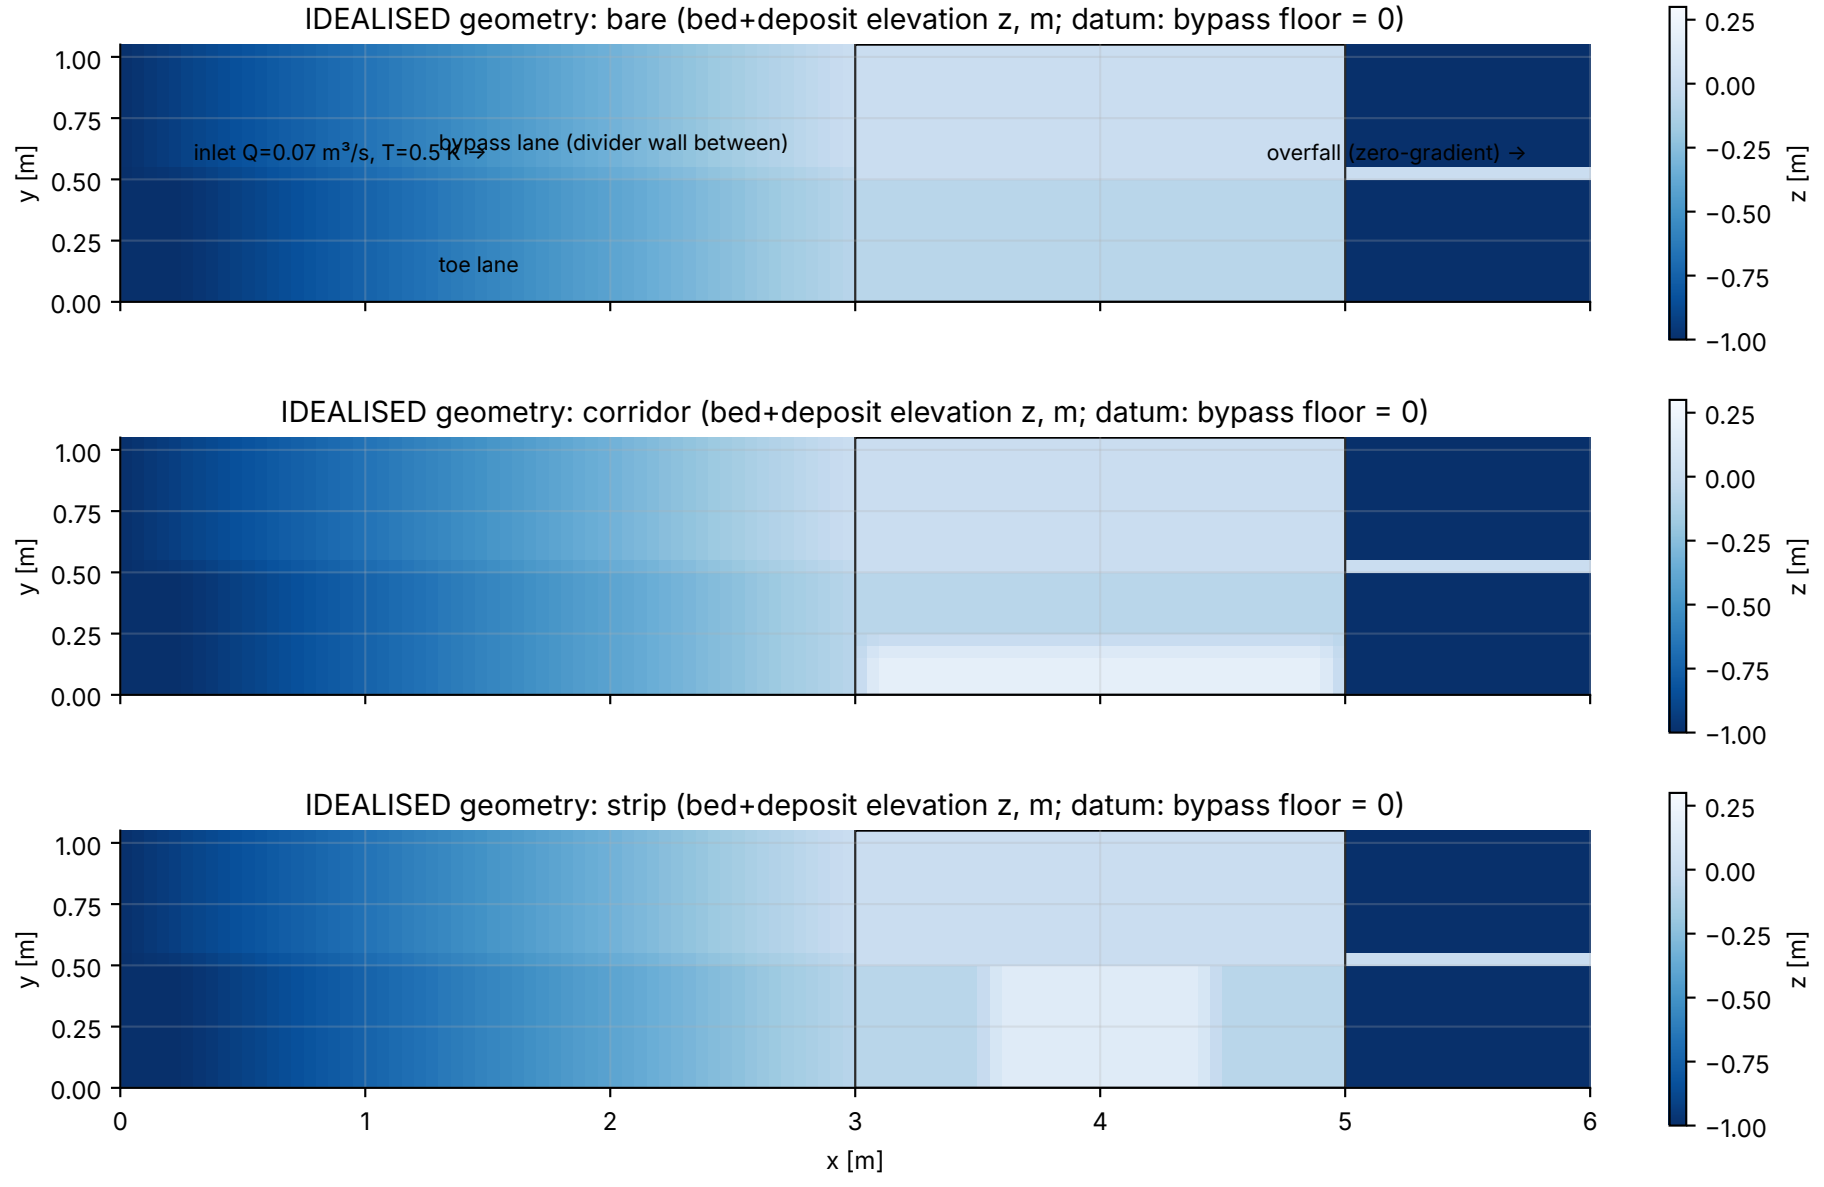

IDEALISED geometry: bare (bed+deposit elevation z, m; datum: bypass floor = 0)
inlet Q=0.07 m³/s, T=0.5 K →
bypass lane (divider wall between)
overfall (zero-gradient) →
toe lane
IDEALISED geometry: corridor (bed+deposit elevation z, m; datum: bypass floor = 0)
IDEALISED geometry: strip (bed+deposit elevation z, m; datum: bypass floor = 0)
y [m]
x [m]
z [m]
0.00
0.25
0.50
0.75
1.00
0
1
2
3
4
5
6
0.25
0.00
−0.25
−0.50
−0.75
−1.00