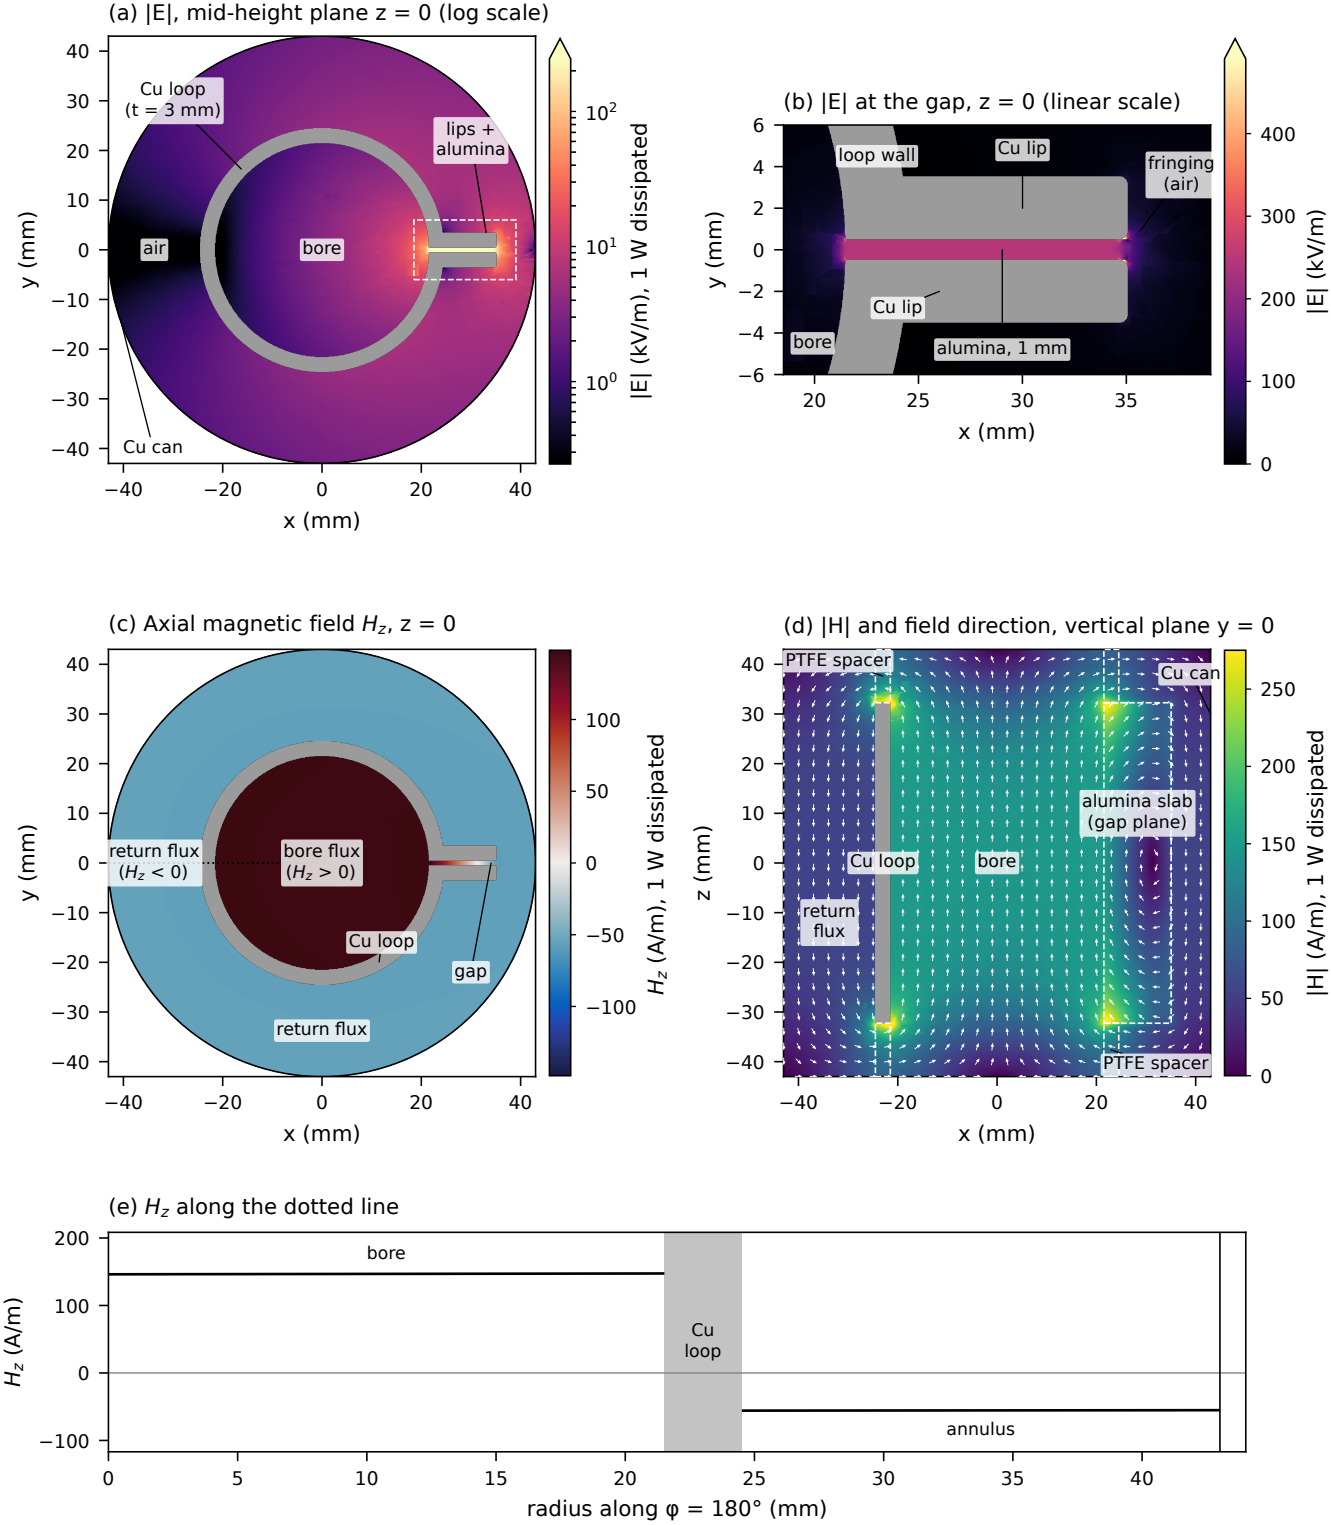

(a) |E|, mid-height plane z = 0 (log scale)
Cu loop
(t = 3 mm)
lips +
alumina
air
bore
Cu can
x (mm)
y (mm)
|E| (kV/m), 1 W dissipated
(b) |E| at the gap, z = 0 (linear scale)
loop wall
Cu lip
fringing
(air)
Cu lip
bore
alumina, 1 mm
x (mm)
y (mm)
|E| (kV/m)
(c) Axial magnetic field H_z, z = 0
return flux
(H_z < 0)
bore flux
(H_z > 0)
Cu loop
gap
return flux
x (mm)
y (mm)
H_z (A/m), 1 W dissipated
(d) |H| and field direction, vertical plane y = 0
PTFE spacer
Cu can
alumina slab
(gap plane)
Cu loop
bore
return
flux
PTFE spacer
x (mm)
z (mm)
|H| (A/m), 1 W dissipated
(e) H_z along the dotted line
bore
Cu
loop
annulus
H_z (A/m)
radius along φ = 180° (mm)