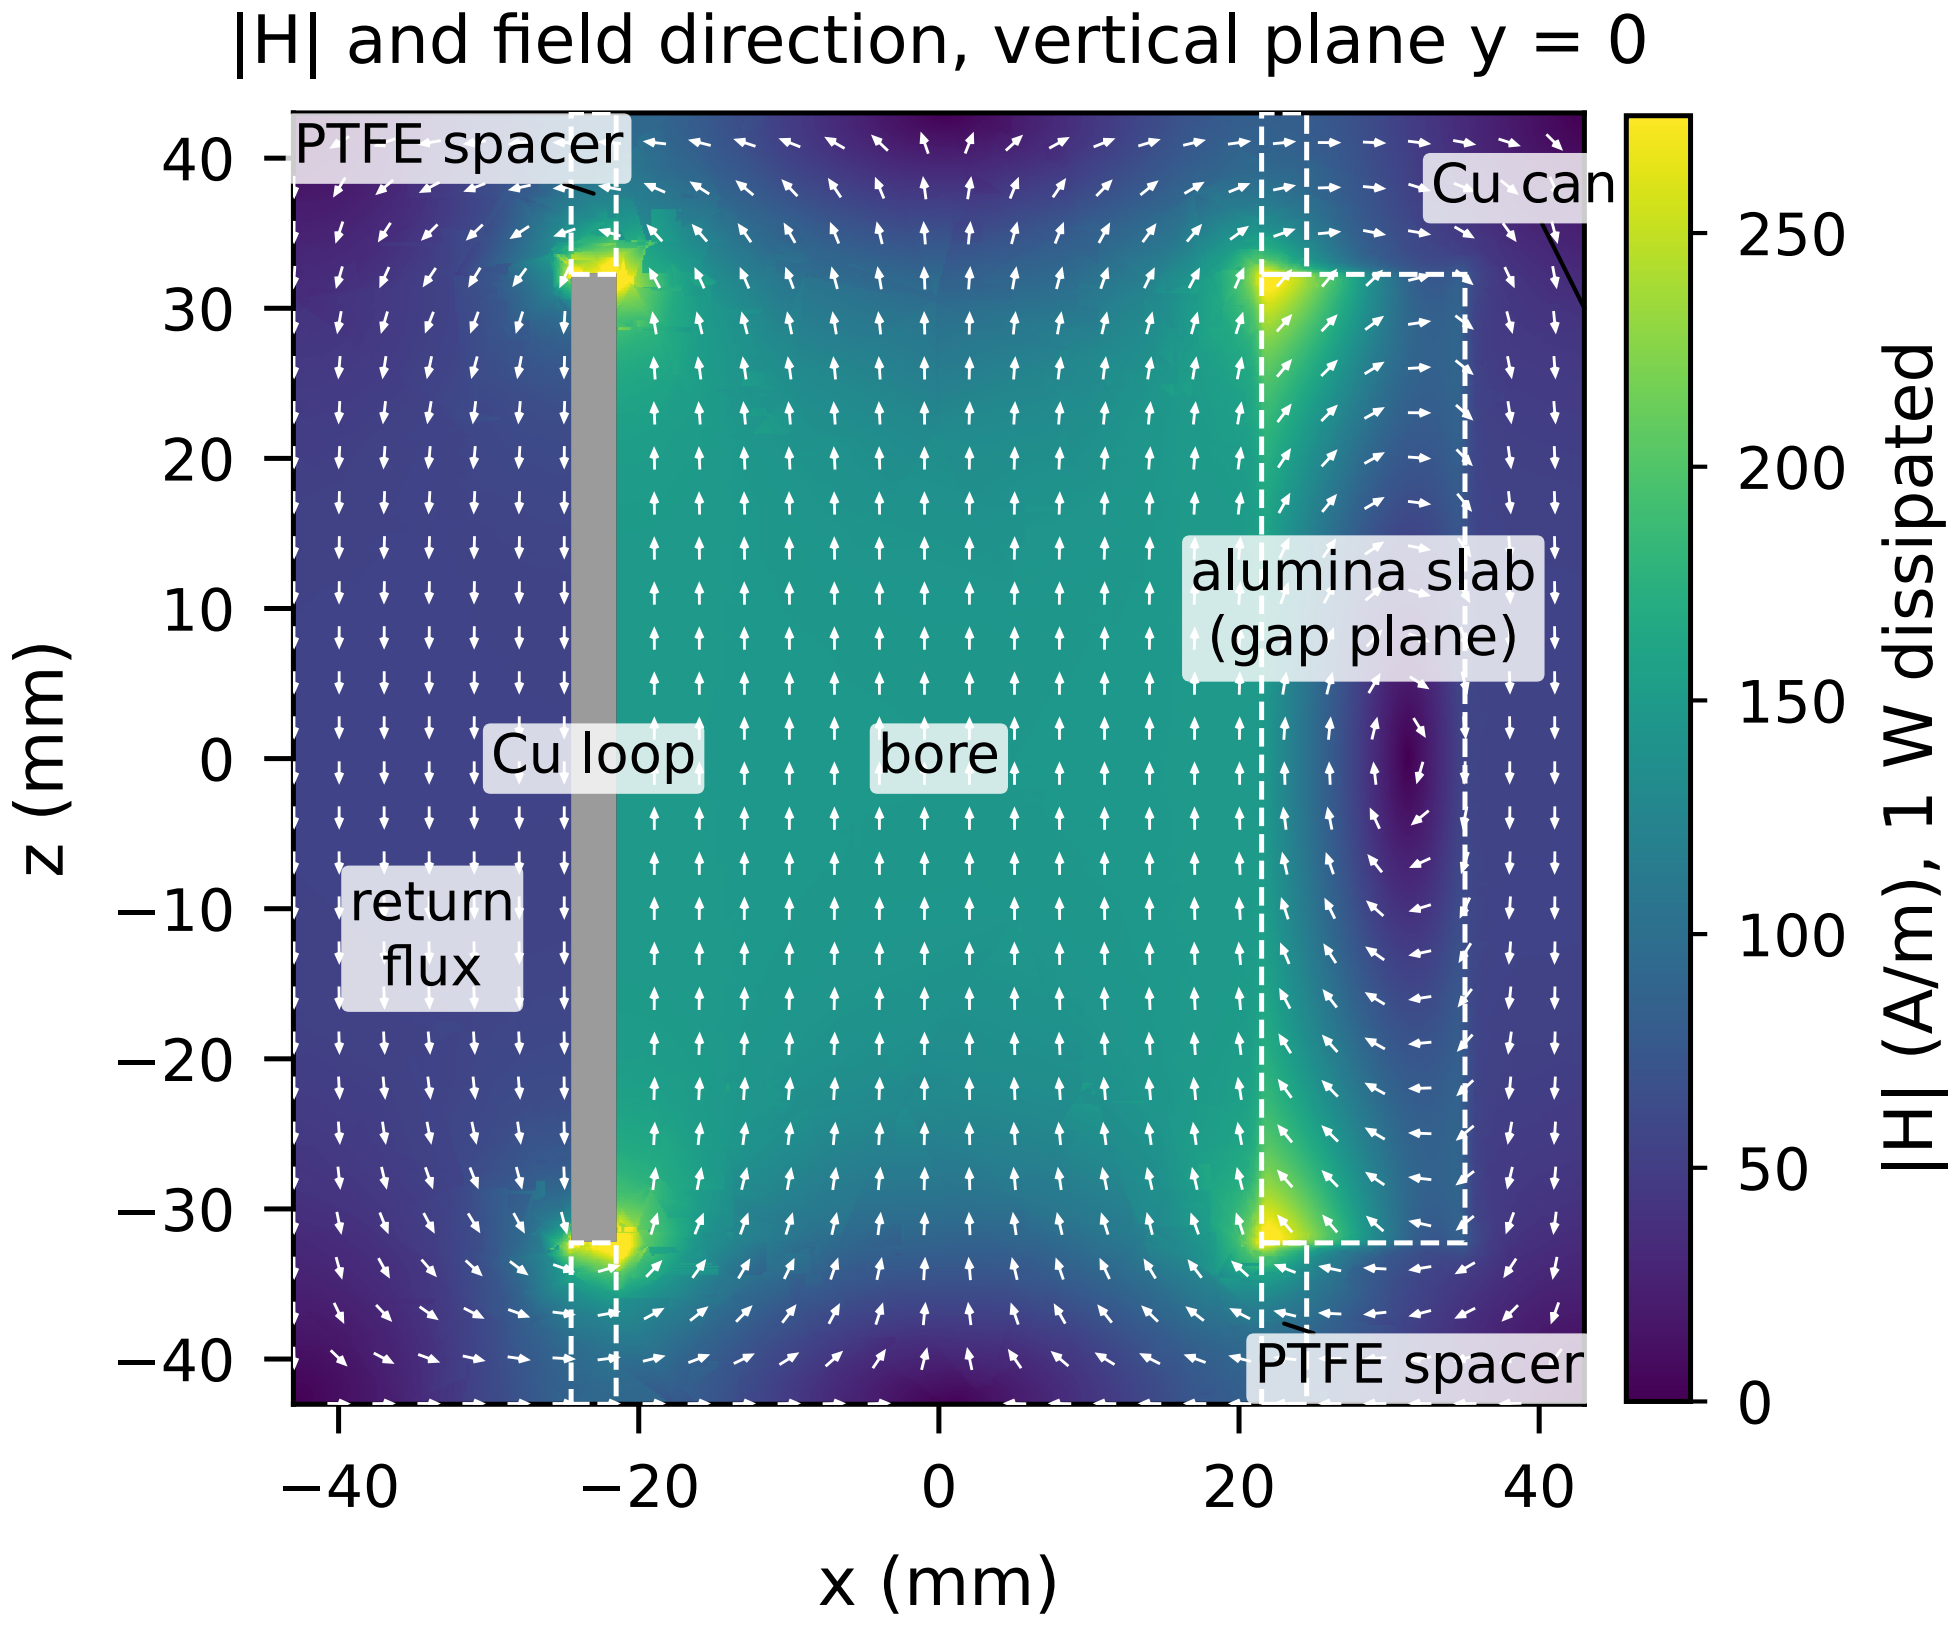

|H| and field direction, vertical plane y = 0
PTFE spacer
Cu can
alumina slab
(gap plane)
Cu loop
bore
return
flux
PTFE spacer
z (mm)
x (mm)
|H| (A/m), 1 W dissipated
40
30
20
10
0
−10
−20
−30
−40
−40
−20
0
20
40
250
200
150
100
50
0