Lab 7

Commented [1]: 5-3 wireshark file

The firewalls were disabled on the PCs in the physical setup due to it blocking packets, causing the ping commands to fail. This lab utilized Wireshark software.

1
1

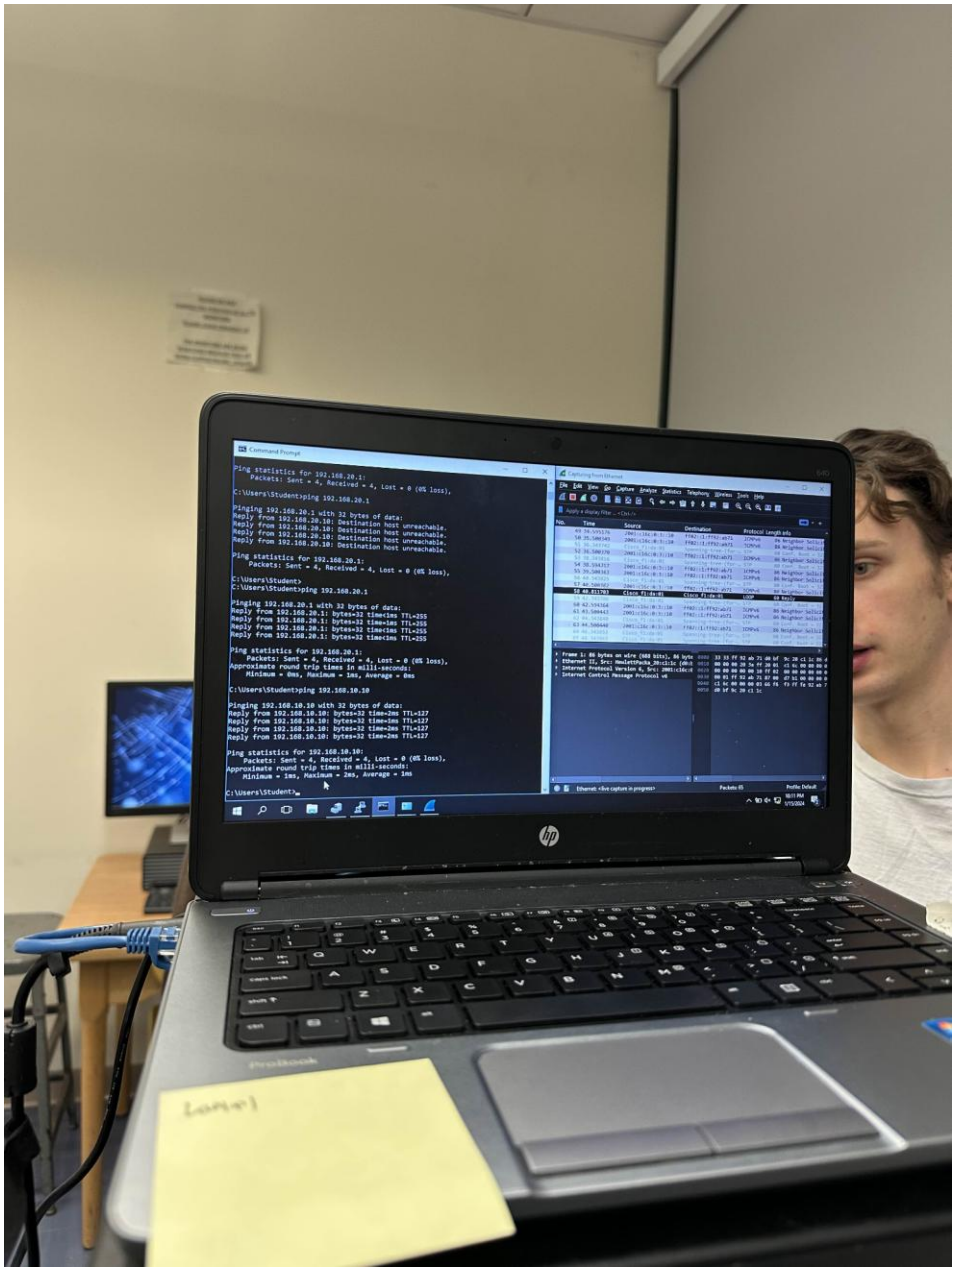
Command Prompt
Ping statistics for 192.168.20.1:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
C:\Users\Student>ping 192.168.20.1
Pinging 192.168.20.1 with 32 bytes of data:
Reply from 192.168.20.10: Destination host unreachable.
Reply from 192.168.20.10: Destination host unreachable.
Reply from 192.168.20.10: Destination host unreachable.
Reply from 192.168.20.10: Destination host unreachable.
Ping statistics for 192.168.20.1:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
C:\Users\Student>
C:\Users\Student>ping 192.168.20.1
Pinging 192.168.20.1 with 32 bytes of data:
Reply from 192.168.20.1: bytes=32 time=1ms TTL=255
Reply from 192.168.20.1: bytes=32 time=1ms TTL=255
Reply from 192.168.20.1: bytes=32 time=1ms TTL=255
Reply from 192.168.20.1: bytes=32 time=1ms TTL=255
Ping statistics for 192.168.20.1:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 1ms, Average = 0ms
C:\Users\Student>ping 192.168.10.10
Pinging 192.168.10.10 with 32 bytes of data:
Reply from 192.168.10.10: bytes=32 time=2ms TTL=127
Reply from 192.168.10.10: bytes=32 time=1ms TTL=127
Reply from 192.168.10.10: bytes=32 time=2ms TTL=127
Reply from 192.168.10.10: bytes=32 time=2ms TTL=127
Ping statistics for 192.168.10.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 2ms, Average = 1ms
C:\Users\Student>
Capturing from Ethernet
Packets: 85
Profile: Default

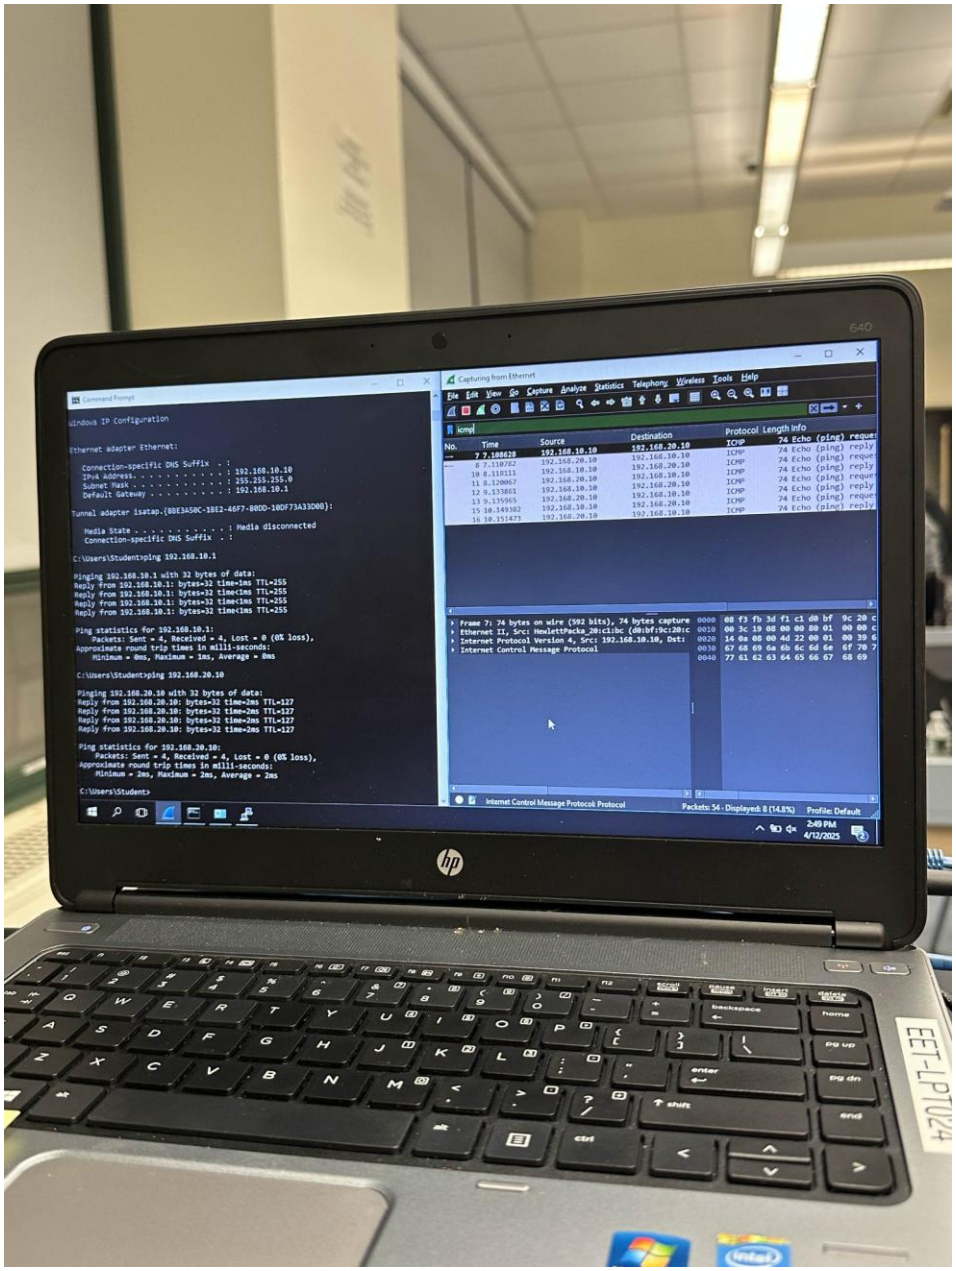
Command Prompt
Windows IP Configuration
Ethernet adapter Ethernet:
Connection-specific DNS Suffix . :
IPv4 Address. . . . . : 192.168.10.10
Subnet Mask . . . . . : 255.255.255.0
Default Gateway . . . . . : 192.168.10.1
Tunnel adapter isatap.{8BE3A50C-1BE2-46F7-B0DD-10DF73A33D8B}:
Media State . . . . . : Media disconnected
Connection-specific DNS Suffix . :
C:\Users\Student>ping 192.168.10.1
Pinging 192.168.10.1 with 32 bytes of data:
Reply from 192.168.10.1: bytes=32 time=1ms TTL=255
Reply from 192.168.10.1: bytes=32 time<1ms TTL=255
Reply from 192.168.10.1: bytes=32 time<1ms TTL=255
Reply from 192.168.10.1: bytes=32 time<1ms TTL=255
Ping statistics for 192.168.10.1:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 1ms, Average = 0ms
C:\Users\Student>ping 192.168.20.10
Pinging 192.168.20.10 with 32 bytes of data:
Reply from 192.168.20.10: bytes=32 time=2ms TTL=127
Reply from 192.168.20.10: bytes=32 time=2ms TTL=127
Reply from 192.168.20.10: bytes=32 time=2ms TTL=127
Reply from 192.168.20.10: bytes=32 time=2ms TTL=127
Ping statistics for 192.168.20.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 2ms, Maximum = 2ms, Average = 2ms
C:\Users\Student>
Capturing from Ethernet
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
icmp
No. Time Source Destination Protocol Length Info
7 7.108628 192.168.10.10 192.168.20.10 ICMP 74 Echo (ping) reque
8 7.110782 192.168.20.10 192.168.10.10 ICMP 74 Echo (ping) reply
10 8.118111 192.168.10.10 192.168.20.10 ICMP 74 Echo (ping) reque
11 8.120067 192.168.20.10 192.168.10.10 ICMP 74 Echo (ping) reply
12 9.133861 192.168.10.10 192.168.20.10 ICMP 74 Echo (ping) reque
13 9.135965 192.168.20.10 192.168.10.10 ICMP 74 Echo (ping) reply
15 10.149382 192.168.10.10 192.168.20.10 ICMP 74 Echo (ping) reque
16 10.151473 192.168.20.10 192.168.10.10 ICMP 74 Echo (ping) reply
Frame 7: 74 bytes on wire (592 bits), 74 bytes capture
Ethernet II, Src: HewlettPacka_20:c1:bc (d0:bf:9c:20:c
Internet Protocol Version 4, Src: 192.168.10.10, Dst:
Internet Control Message Protocol
Internet Control Message Protocol: Protocol
Packets: 54 · Displayed: 8 (14.8%)
Profile: Default
2:49 PM
4/12/2025
EET-LPTU24

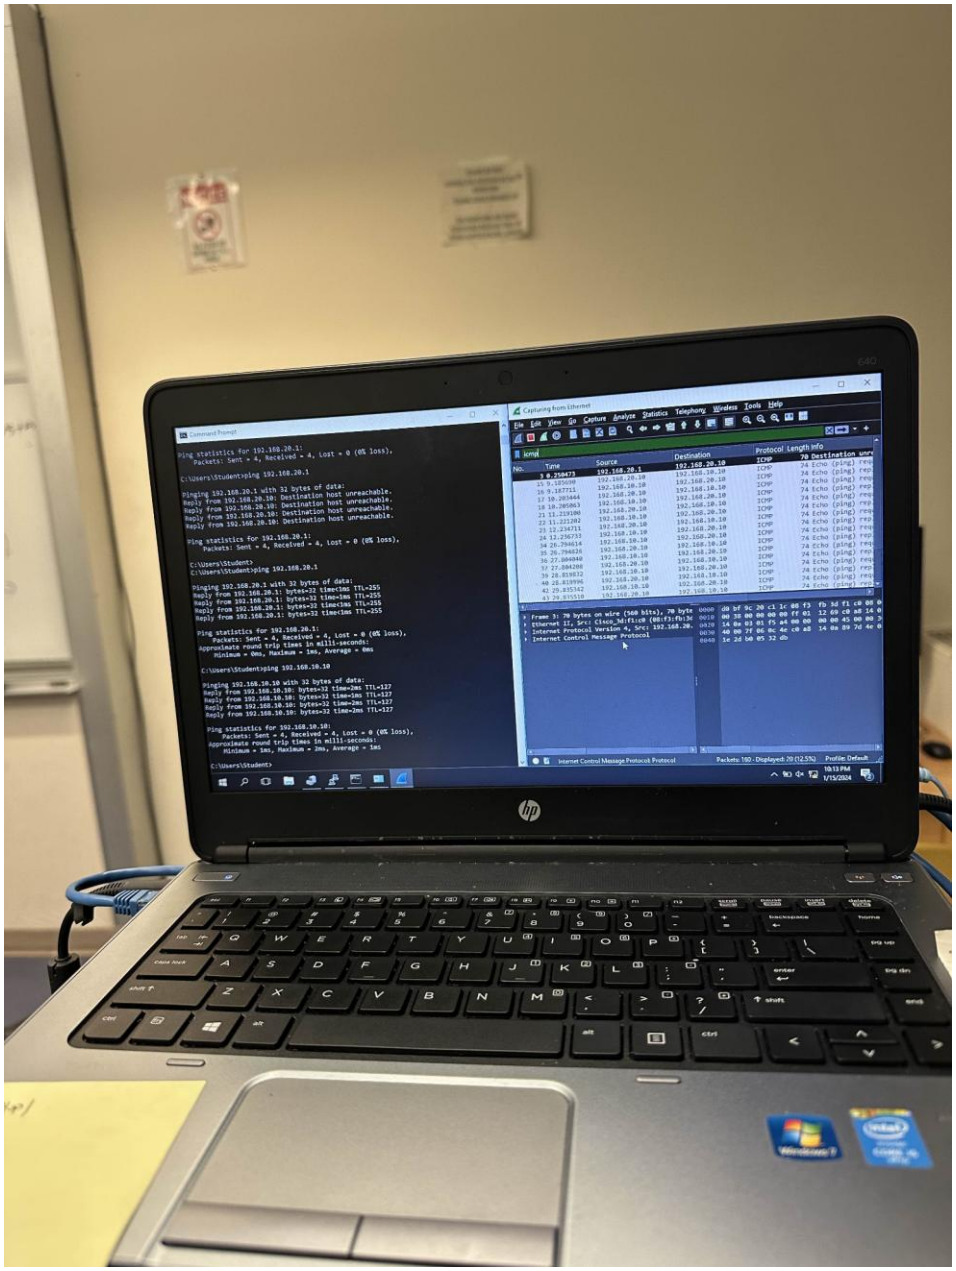
Command Prompt
Ping statistics for 192.168.20.1:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
C:\Users\Student>ping 192.168.20.1
Pinging 192.168.20.1 with 32 bytes of data:
Reply from 192.168.20.10: Destination host unreachable.
Reply from 192.168.20.10: Destination host unreachable.
Reply from 192.168.20.10: Destination host unreachable.
Reply from 192.168.20.10: Destination host unreachable.
Ping statistics for 192.168.20.1:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
C:\Users\Student>
C:\Users\Student>ping 192.168.20.1
Pinging 192.168.20.1 with 32 bytes of data:
Reply from 192.168.20.1: bytes=32 time<1ms TTL=255
Reply from 192.168.20.1: bytes=32 time<1ms TTL=255
Reply from 192.168.20.1: bytes=32 time<1ms TTL=255
Reply from 192.168.20.1: bytes=32 time<1ms TTL=255
Ping statistics for 192.168.20.1:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 1ms, Average = 0ms
C:\Users\Student>ping 192.168.10.10
Pinging 192.168.10.10 with 32 bytes of data:
Reply from 192.168.10.10: bytes=32 time=2ms TTL=127
Reply from 192.168.10.10: bytes=32 time=1ms TTL=127
Reply from 192.168.10.10: bytes=32 time=2ms TTL=127
Reply from 192.168.10.10: bytes=32 time=2ms TTL=127
Ping statistics for 192.168.10.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 2ms, Average = 1ms
C:\Users\Student>
Capturing from Ethernet
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
icmp
No. Time Source Destination Protocol Length Info
Frame 3: 70 bytes on wire (560 bits), 70 byte
Ethernet II, Src: Cisco_3d:f1:c0 (00:f3:fb:3d
Internet Protocol Version 4, Src: 192.168.20.
Internet Control Message Protocol
Internet Control Message Protocol Protocol
Packets: 160 · Displayed: 20 (12.5%)
Profile: Default
10:13 PM
1/15/2024

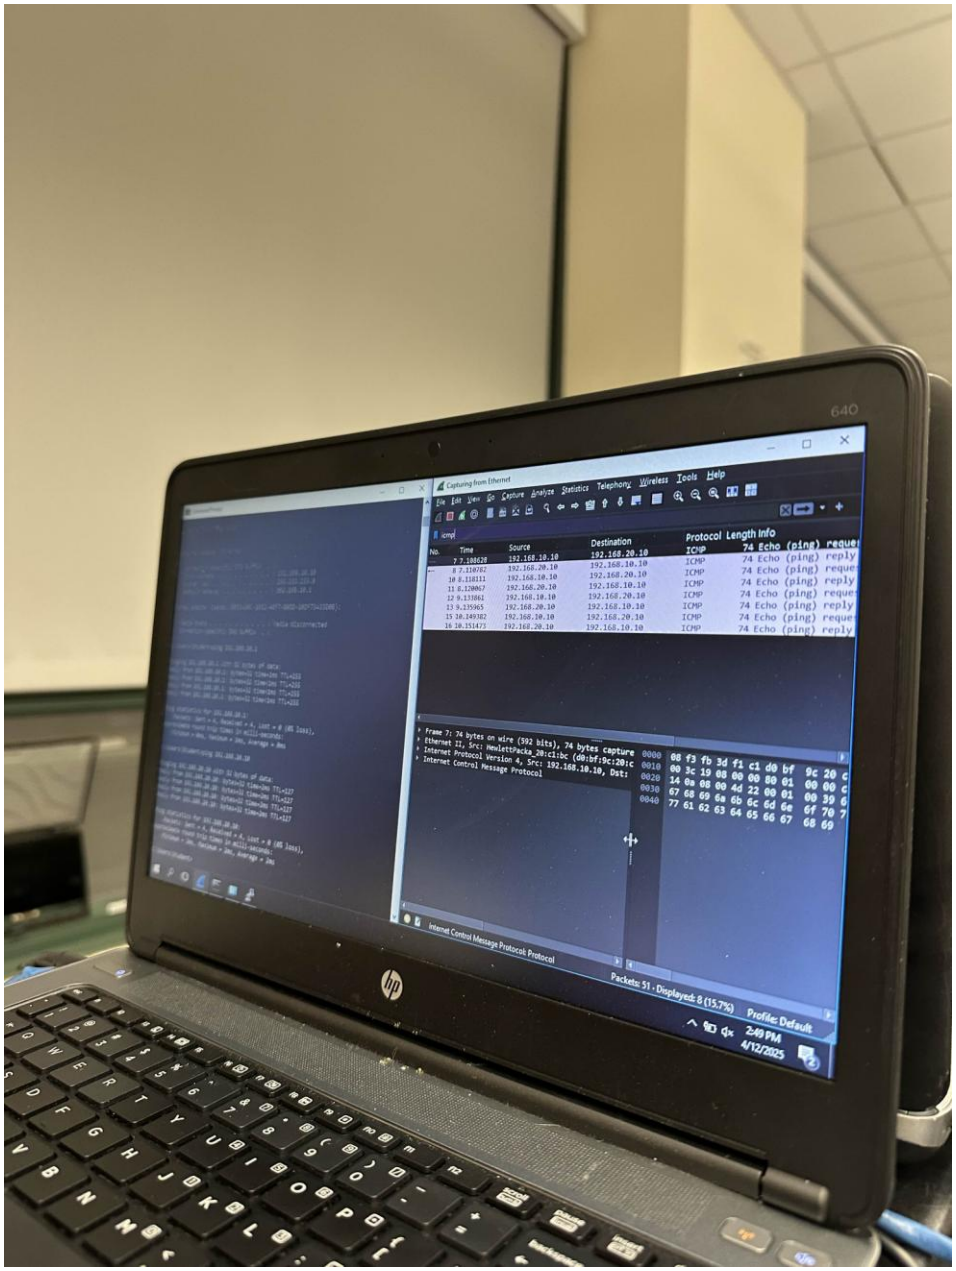
Capturing from Ethernet
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
icmp
No. Time Source Destination Protocol Length Info
7 7.100628 192.168.10.10 192.168.20.10 ICMP 74 Echo (ping) reque
8 7.110782 192.168.20.10 192.168.10.10 ICMP 74 Echo (ping) reply
10 8.110111 192.168.10.10 192.168.20.10 ICMP 74 Echo (ping) reque
11 8.120067 192.168.20.10 192.168.10.10 ICMP 74 Echo (ping) reply
12 9.133061 192.168.10.10 192.168.20.10 ICMP 74 Echo (ping) reque
13 9.135965 192.168.20.10 192.168.10.10 ICMP 74 Echo (ping) reply
15 10.149382 192.168.10.10 192.168.20.10 ICMP 74 Echo (ping) reque
16 10.151473 192.168.20.10 192.168.10.10 ICMP 74 Echo (ping) reply
Frame 7: 74 bytes on wire (592 bits), 74 bytes capture
Ethernet II, Src: HewlettPacka_20:c1:bc (d0:bf:9c:20:c
Internet Protocol Version 4, Src: 192.168.10.10, Dst:
Internet Control Message Protocol
0000 00 f3 fb 3d f1 c1 d0 bf 9c 20 c
0010 00 3c 19 00 00 00 80 01 00 00 c
0020 14 0a 08 00 4d 22 00 01 00 39 6
0030 67 68 69 6a 6b 6c 6d 6e 6f 70 7
0040 77 61 62 63 64 65 66 67 68 69
Internet Control Message Protocol: Protocol
Packets: 51 · Displayed: 8 (15.7%)
Profile: Default
2:40 PM
4/12/2025