Lab 1

In the physical configuration, everything is the same as the Cisco packet tracer topology. The only difference is that the firewalls were disabled on the PCs in the physical setup due to it blocking packets, causing the ping commands to fail.

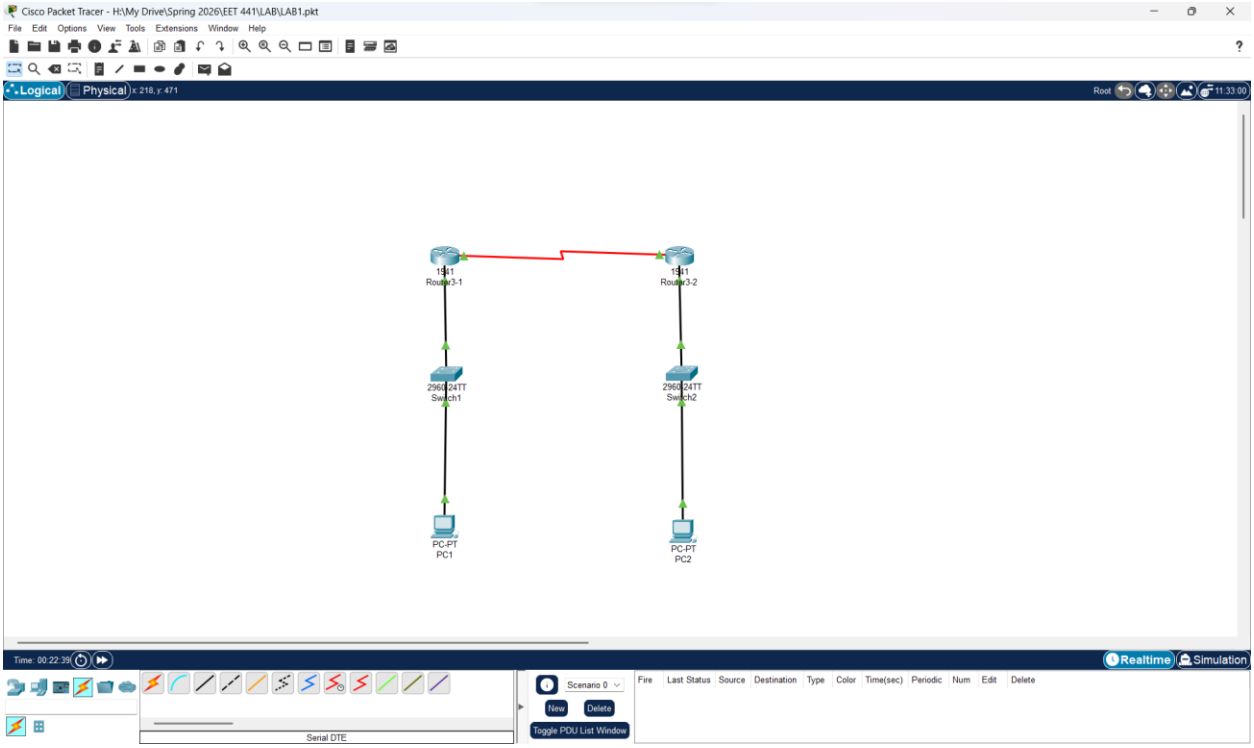

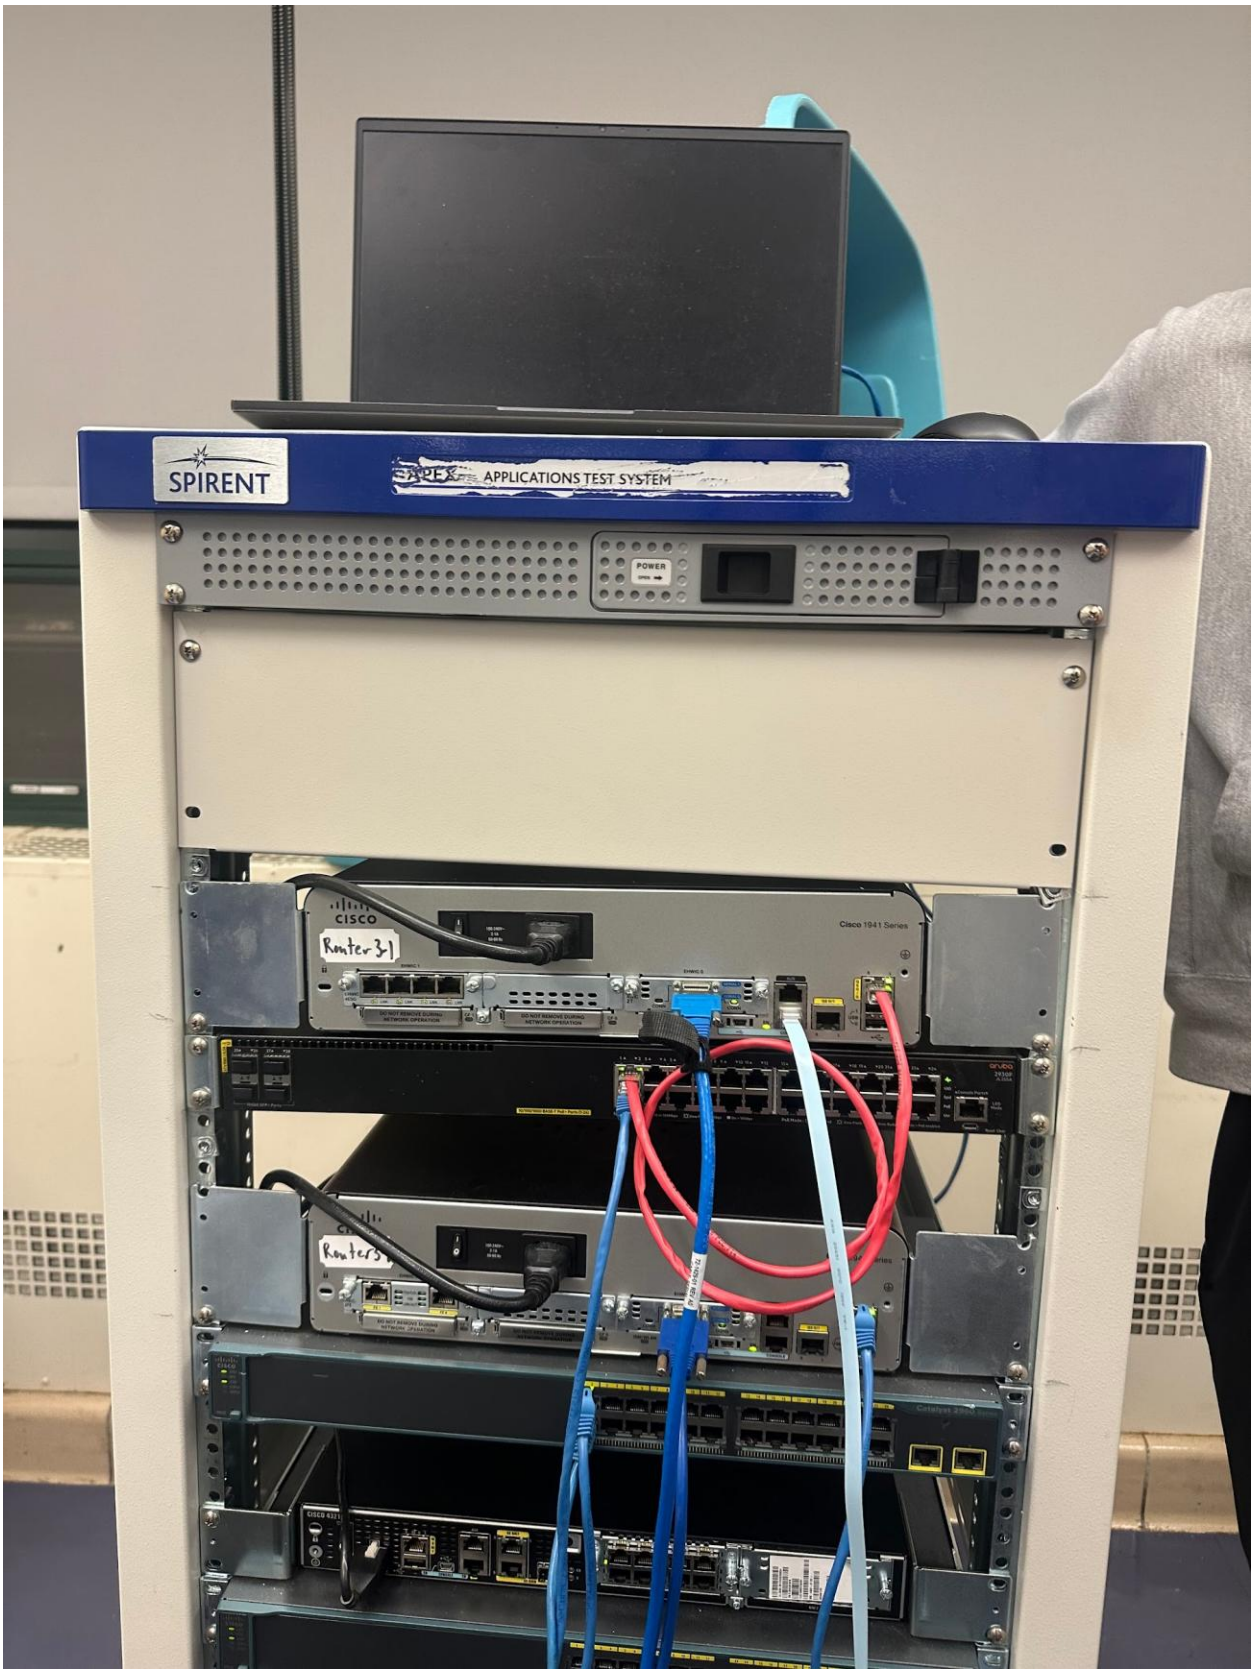
SPIRENT
APPLICATIONS TEST SYSTEM
POWER
CISCO
Router 3-1
Cisco 1941 Series

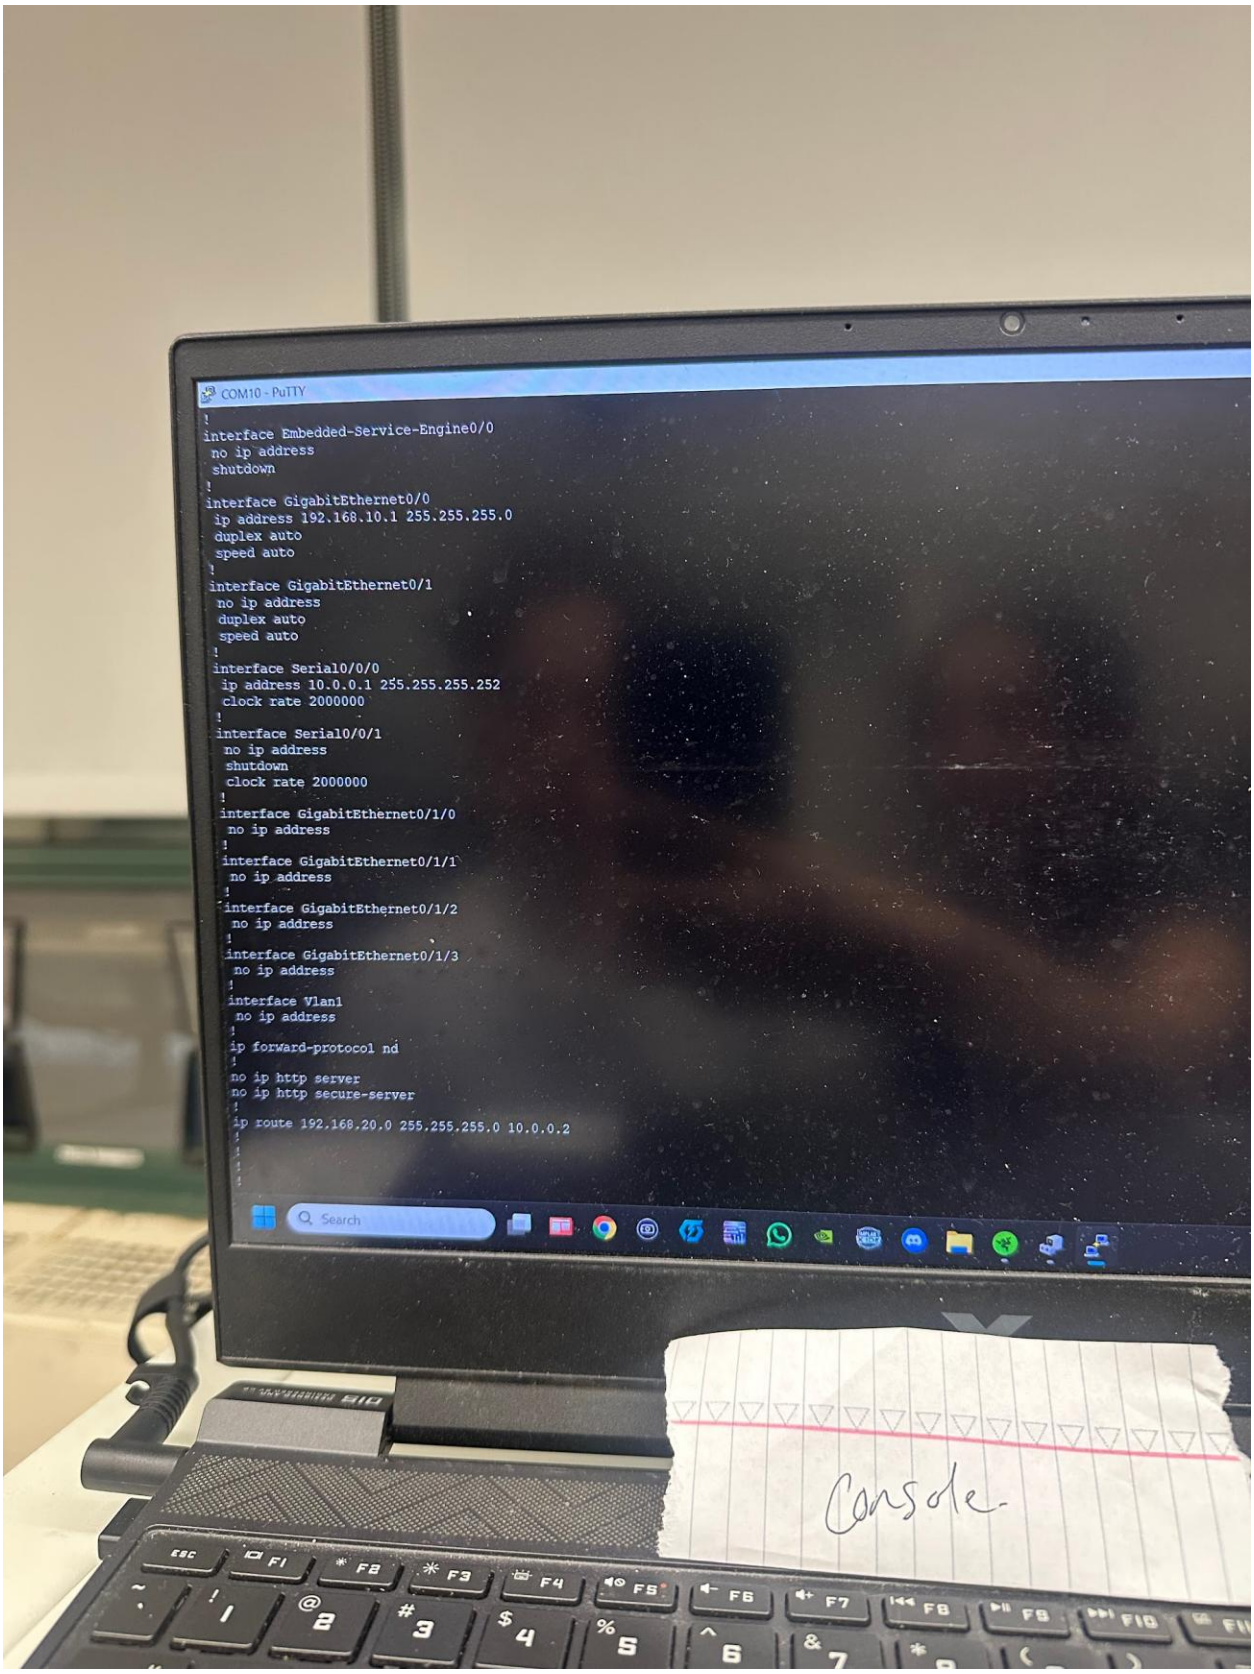
COM10 - PuTTY
!
interface Embedded-Service-Engine0/0
no ip address
shutdown
!
interface GigabitEthernet0/0
ip address 192.168.10.1 255.255.255.0
duplex auto
speed auto
!
interface GigabitEthernet0/1
no ip address
duplex auto
speed auto
!
interface Serial0/0/0
ip address 10.0.0.1 255.255.255.252
clock rate 2000000
!
interface Serial0/0/1
no ip address
shutdown
clock rate 2000000
!
interface GigabitEthernet0/1/0
no ip address
!
interface GigabitEthernet0/1/1
no ip address
!
interface GigabitEthernet0/1/2
no ip address
!
interface GigabitEthernet0/1/3
no ip address
!
interface Vlan1
no ip address
!
ip forward-protocol nd
!
no ip http server
no ip http secure-server
!
ip route 192.168.20.0 255.255.255.0 10.0.0.2
Search
Console-

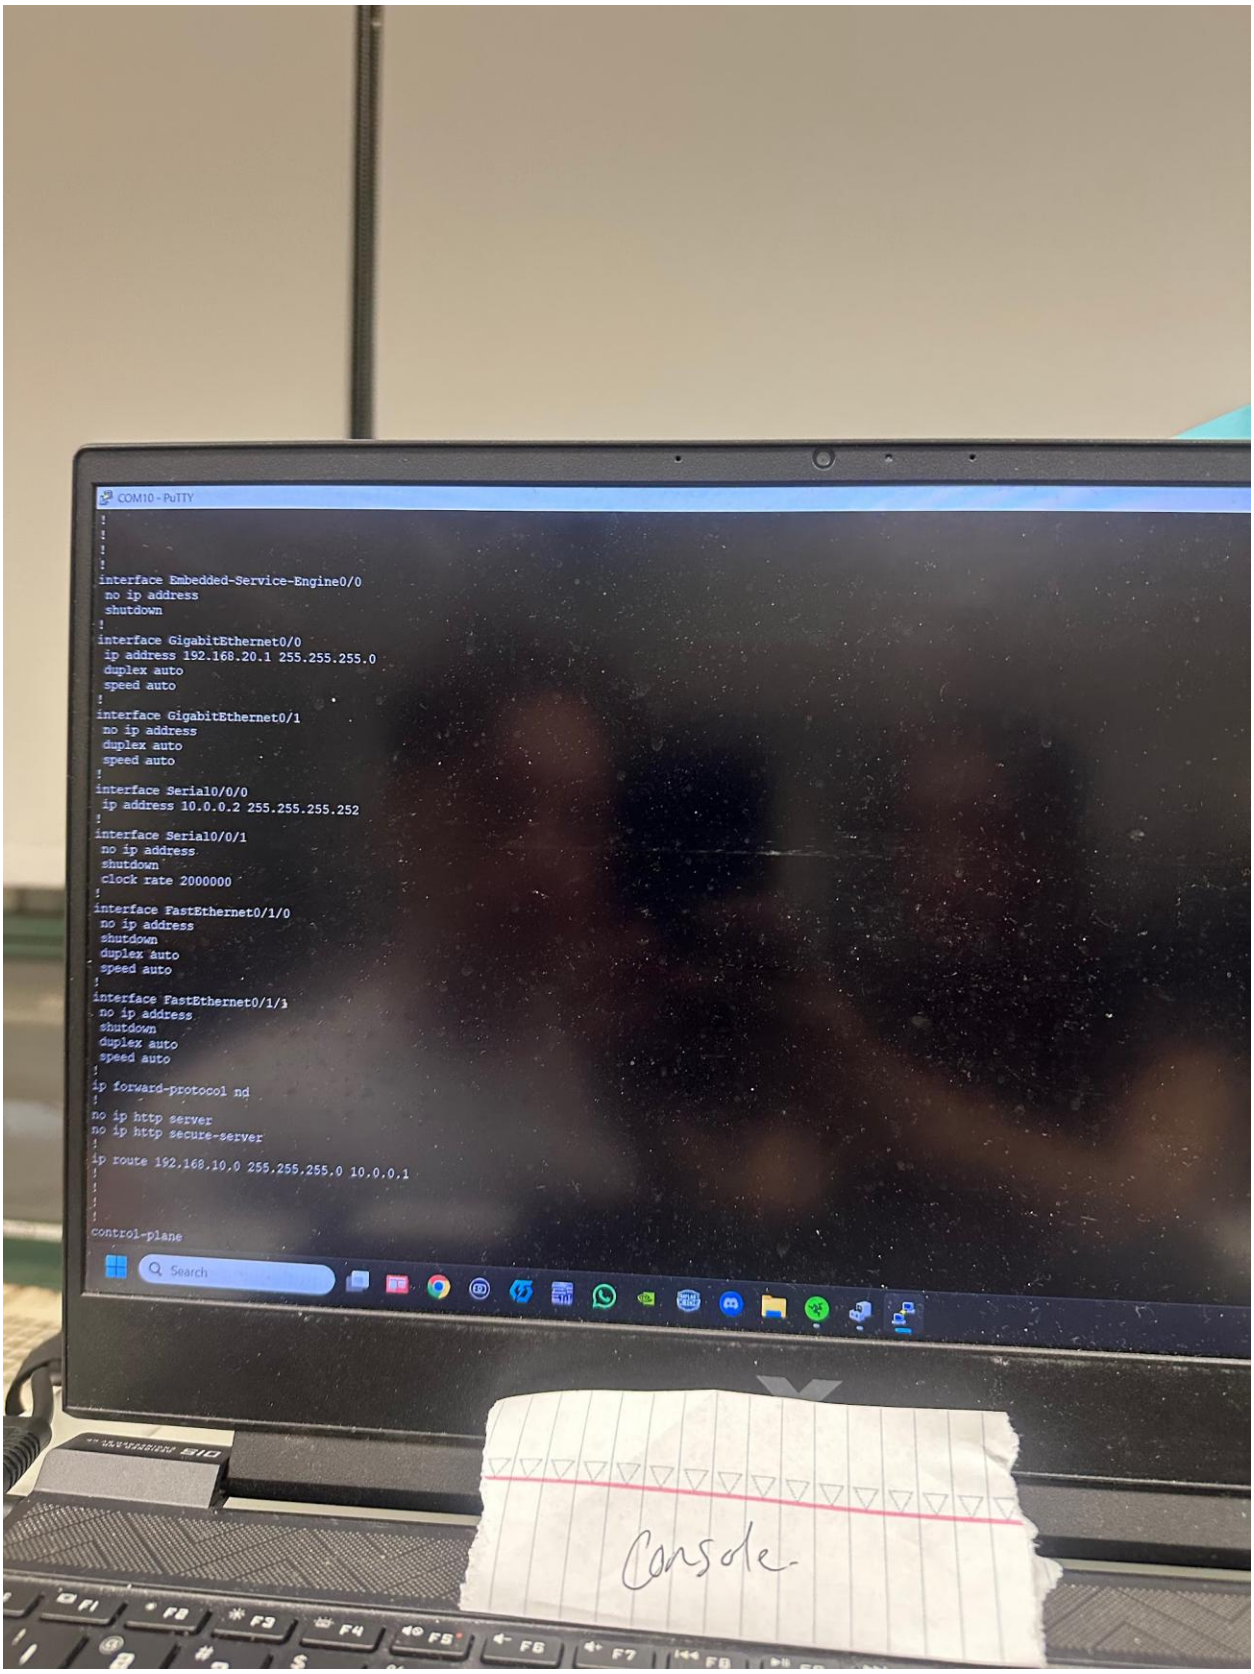
COM10 - PuTTY
!
!
!
!
interface Embedded-Service-Engine0/0
no ip address
shutdown
!
interface GigabitEthernet0/0
ip address 192.168.20.1 255.255.255.0
duplex auto
speed auto
!
interface GigabitEthernet0/1
no ip address
duplex auto
speed auto
!
interface Serial0/0/0
ip address 10.0.0.2 255.255.255.252
!
interface Serial0/0/1
no ip address
shutdown
clock rate 2000000
!
interface FastEthernet0/1/0
no ip address
shutdown
duplex auto
speed auto
!
interface FastEthernet0/1/1
no ip address
shutdown
duplex auto
speed auto
!
ip forward-protocol nd
!
no ip http server
no ip http secure-server
!
ip route 192.168.10.0 255.255.255.0 10.0.0.1
!
!
!
!
control-plane
Search
Console

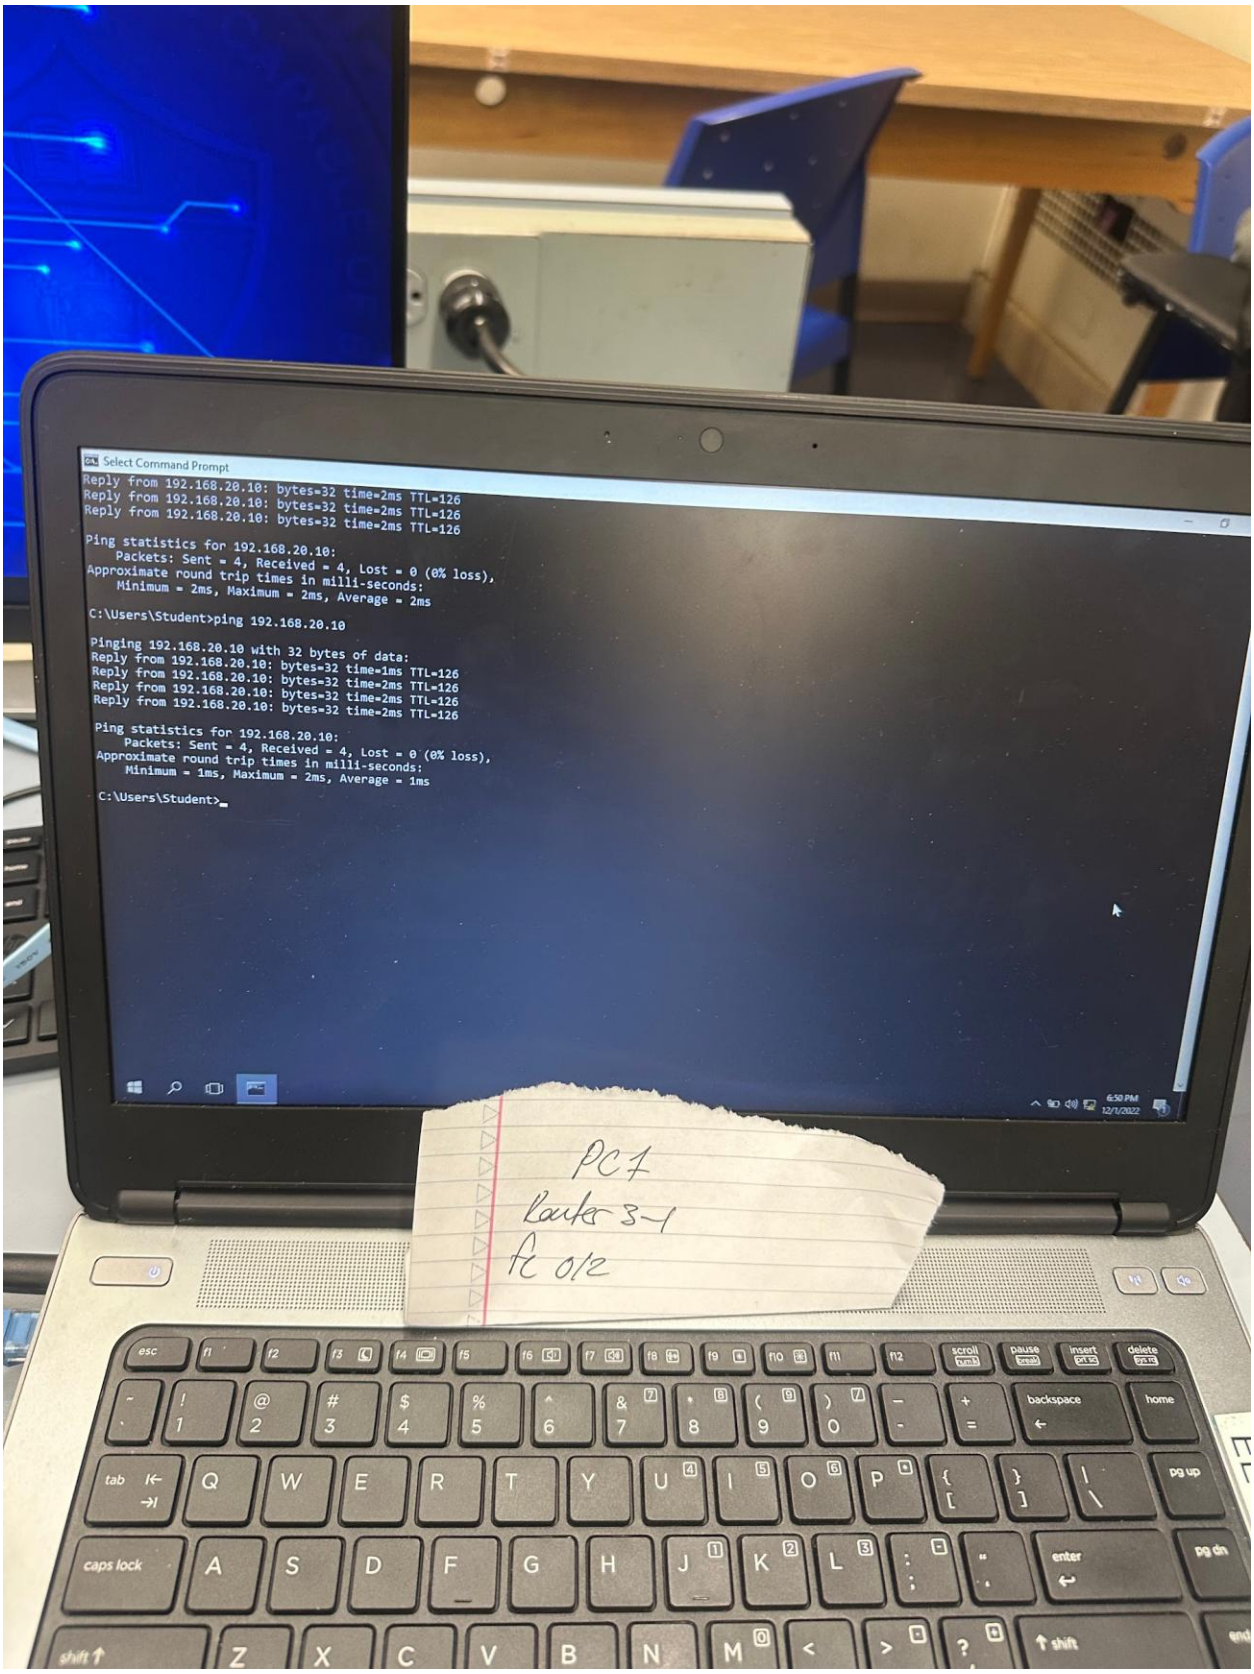
Select Command Prompt
Reply from 192.168.20.10: bytes=32 time=2ms TTL=126
Reply from 192.168.20.10: bytes=32 time=2ms TTL=126
Reply from 192.168.20.10: bytes=32 time=2ms TTL=126
Ping statistics for 192.168.20.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 2ms, Maximum = 2ms, Average = 2ms
C:\Users\Student>ping 192.168.20.10
Pinging 192.168.20.10 with 32 bytes of data:
Reply from 192.168.20.10: bytes=32 time=1ms TTL=126
Reply from 192.168.20.10: bytes=32 time=2ms TTL=126
Reply from 192.168.20.10: bytes=32 time=2ms TTL=126
Reply from 192.168.20.10: bytes=32 time=2ms TTL=126
Ping statistics for 192.168.20.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 2ms, Average = 1ms
C:\Users\Student>
PC1
Router 3-1
fc 0/2

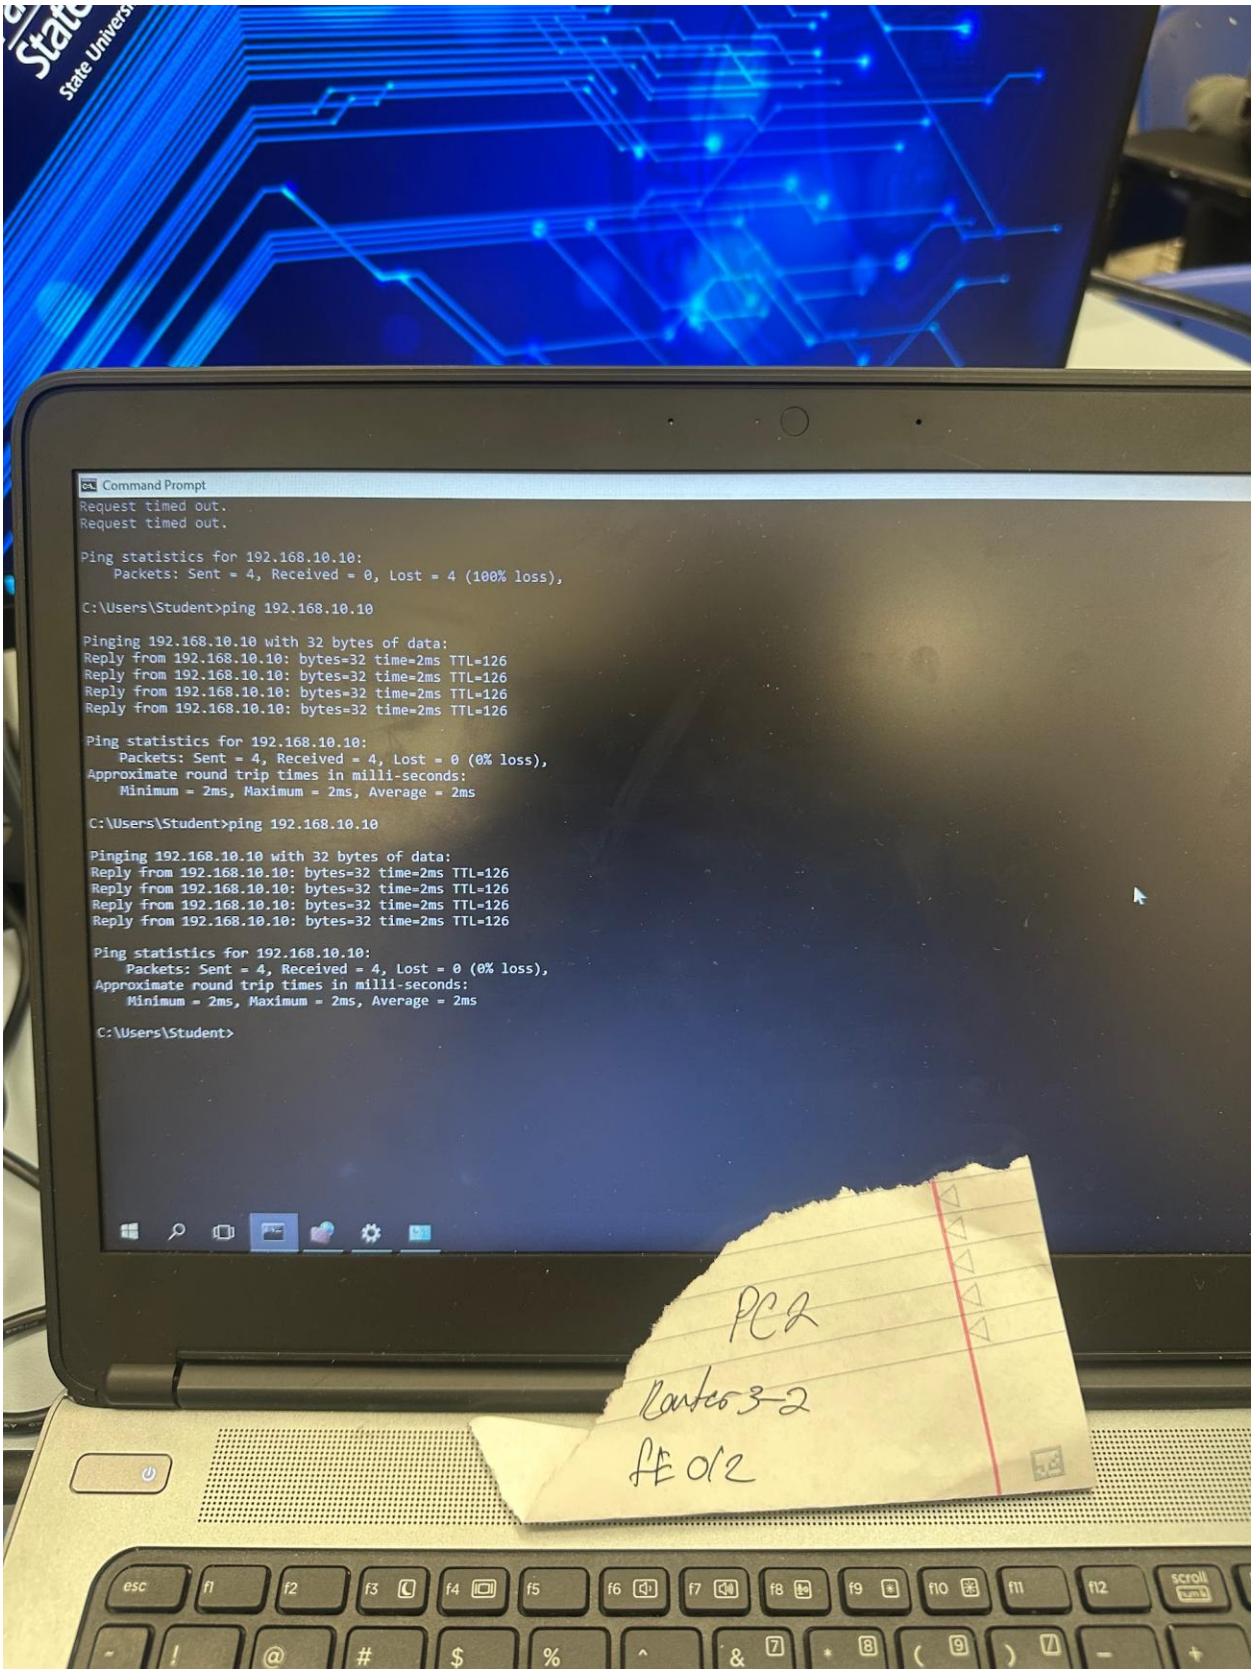
Command Prompt
Request timed out.
Request timed out.
Ping statistics for 192.168.10.10:
Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
C:\Users\Student>ping 192.168.10.10
Pinging 192.168.10.10 with 32 bytes of data:
Reply from 192.168.10.10: bytes=32 time=2ms TTL=126
Reply from 192.168.10.10: bytes=32 time=2ms TTL=126
Reply from 192.168.10.10: bytes=32 time=2ms TTL=126
Reply from 192.168.10.10: bytes=32 time=2ms TTL=126
Ping statistics for 192.168.10.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 2ms, Maximum = 2ms, Average = 2ms
C:\Users\Student>ping 192.168.10.10
Pinging 192.168.10.10 with 32 bytes of data:
Reply from 192.168.10.10: bytes=32 time=2ms TTL=126
Reply from 192.168.10.10: bytes=32 time=2ms TTL=126
Reply from 192.168.10.10: bytes=32 time=2ms TTL=126
Reply from 192.168.10.10: bytes=32 time=2ms TTL=126
Ping statistics for 192.168.10.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 2ms, Maximum = 2ms, Average = 2ms
C:\Users\Student>
PC2
Router 3-2
fE 0/2

**Router3-1 Config:**

```
Router3-1#show running-config
Building configuration...

Current configuration : 794 bytes
!
version 15.1
no service timestamps log datetime msec
no service timestamps debug datetime msec
no service password-encryption
!
hostname Router3-1
!
!
!
!
!
!
!
!
no ip cef
no ipv6 cef
!
!
!
!
license udi pid CISCO1941/K9 sn FTX1524R9H4-
!
!
!
!
!
!
!
!
!
!
!
spanning-tree mode pvst
!
```

```
!
!
!
!
!
interface GigabitEthernet0/0
 ip address 192.168.10.1 255.255.255.0
 duplex auto
 speed auto
!
interface GigabitEthernet0/1
 no ip address
 duplex auto
 speed auto
!
interface Serial0/0/0
 ip address 10.0.0.1 255.255.255.252
!
interface Serial0/0/1
 no ip address
 clock rate 2000000
 shutdown
!
interface Vlan1
 no ip address
 shutdown
!
ip classless
ip route 192.168.20.0 255.255.255.0 10.0.0.2
!
ip flow-export version 9
!
!
!
!
!
!
!
line con 0
!
```

```
line aux 0
!
line vty 0 4
 login
!
!
!
end
```

**Router 3-2 Config:**

```
Router3-2#show running-config
Building configuration...

Current configuration : 814 bytes
!
version 15.1
no service timestamps log datetime msec
no service timestamps debug datetime msec
no service password-encryption
!
hostname Router3-2
!
!
!
!
!
!
!
!
no ip cef
no ipv6 cef
!
!
!
!
license udi pid CISCO1941/K9 sn FTX1524H4TZ-
!
!
!
!
!
!
!
!
!
!
!
spanning-tree mode pvst
!
```

```
!
!
!
!
!
interface GigabitEthernet0/0
 ip address 192.168.20.1 255.255.255.0
 duplex auto
 speed auto
!
interface GigabitEthernet0/1
 no ip address
 duplex auto
 speed auto
!
interface Serial0/0/0
 ip address 10.0.0.2 255.255.255.252
 clock rate 2000000
!
interface Serial0/0/1
 no ip address
 clock rate 2000000
 shutdown
!
interface Vlan1
 no ip address
 shutdown
!
ip classless
ip route 192.168.10.0 255.255.255.0 10.0.0.1
!
ip flow-export version 9
!
!
!
!
!
!
!
line con 0
```

```
!
line aux 0
!
line vty 0 4
 login
!
!
!
end
```

## PC1 Config:

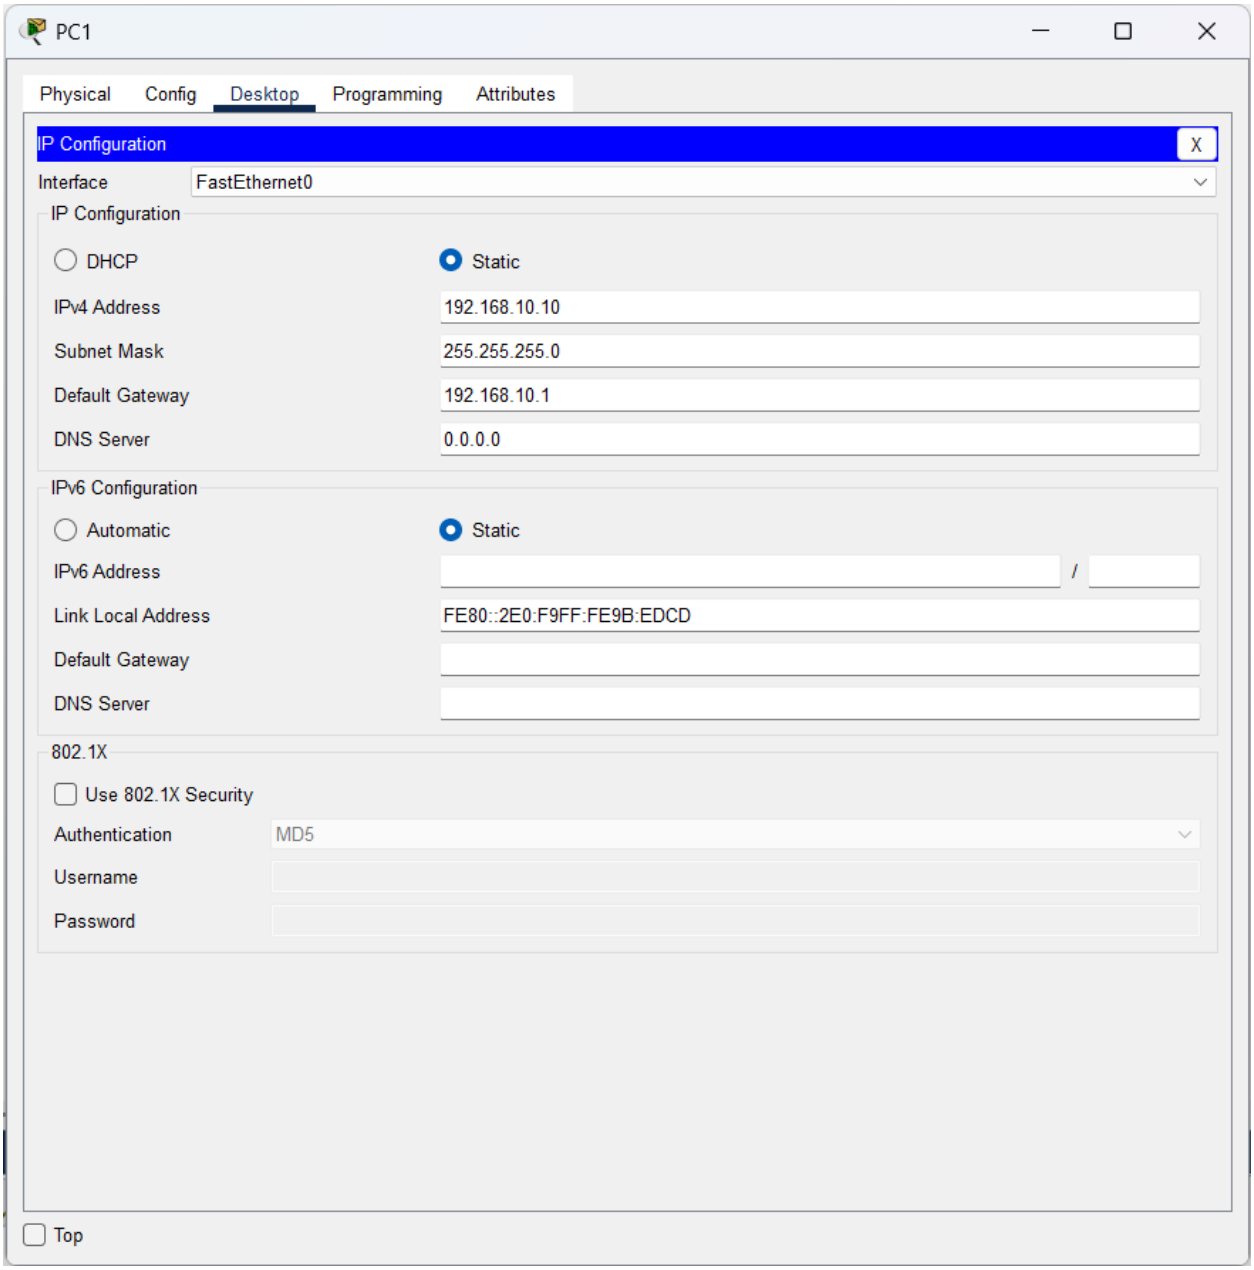
PC1
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.10.10
Subnet Mask
255.255.255.0
Default Gateway
192.168.10.1
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
/
Link Local Address
FE80::2E0:F9FF:FE9B:EDCD
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top

## PC2 Config:

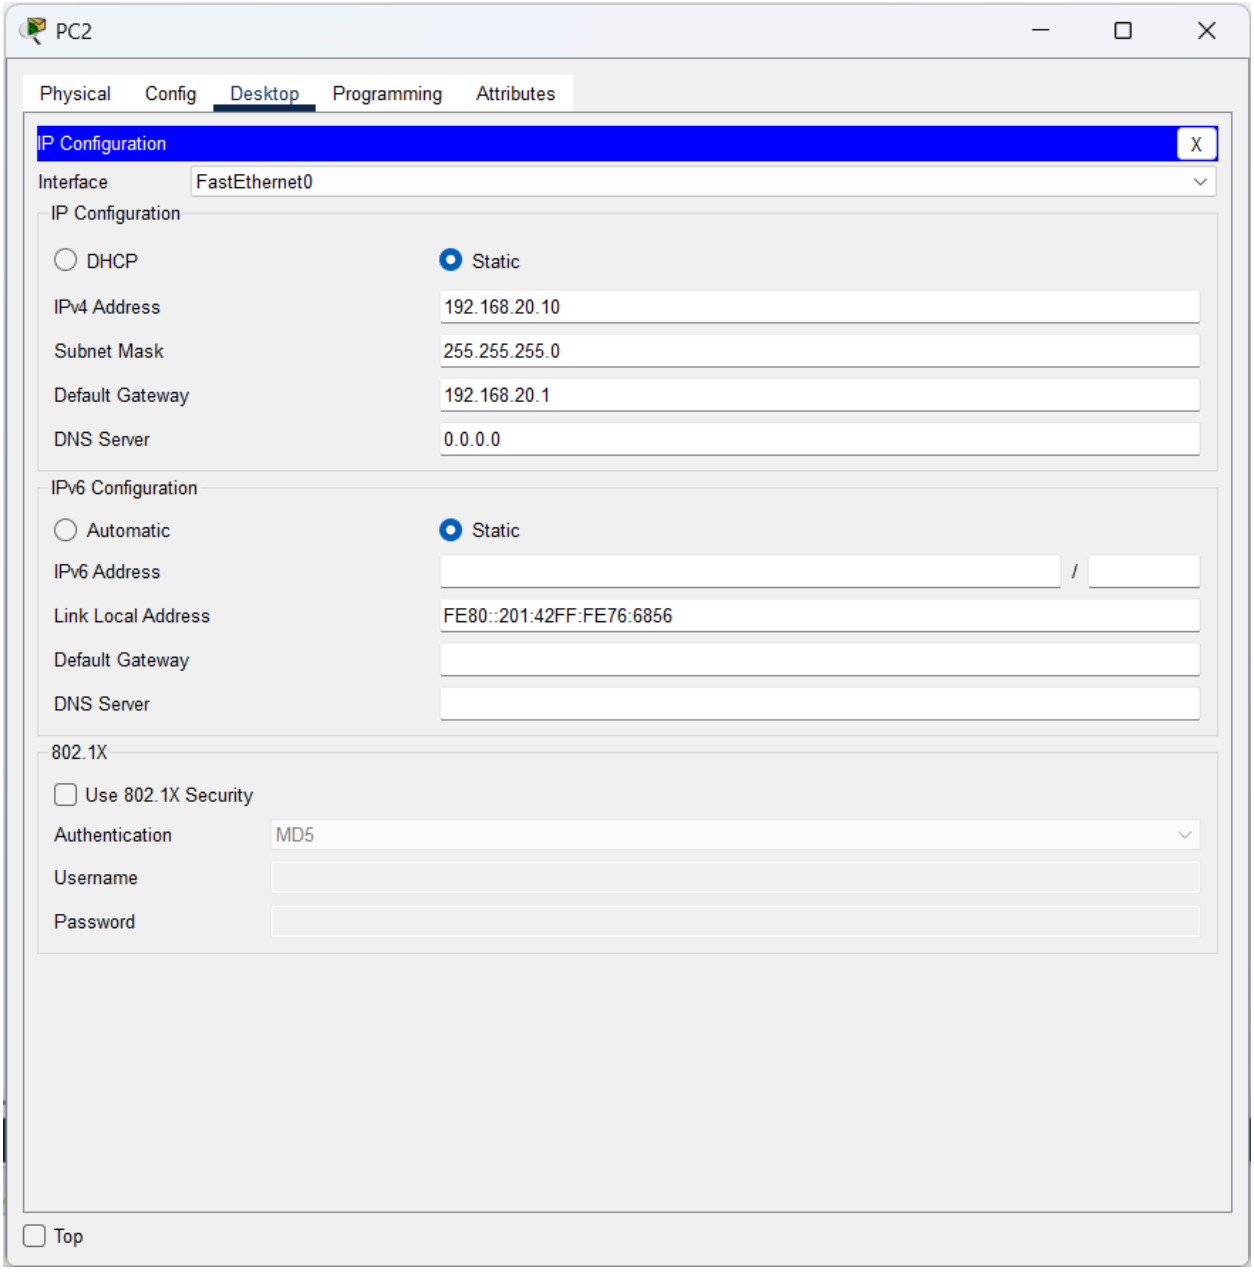
PC2
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.20.10
Subnet Mask
255.255.255.0
Default Gateway
192.168.20.1
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
/
Link Local Address
FE80::201:42FF:FE76:6856
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top