Lab 3

Commented [1]: Lab3: Cisco Pkt 1-2

In the physical configuration, everything is the same as the Cisco packet tracer topology. The only difference is that the firewalls were disabled on the PCs in the physical setup due to it blocking packets, causing the ping commands to fail.

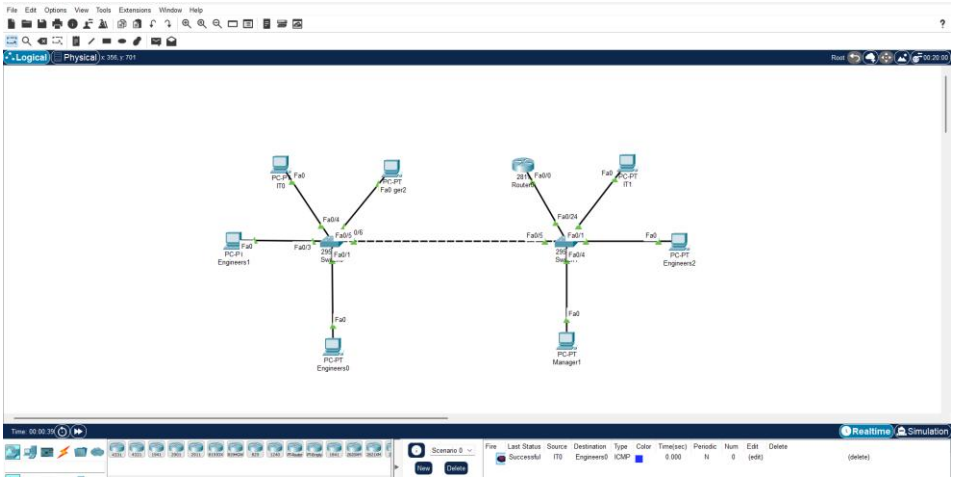

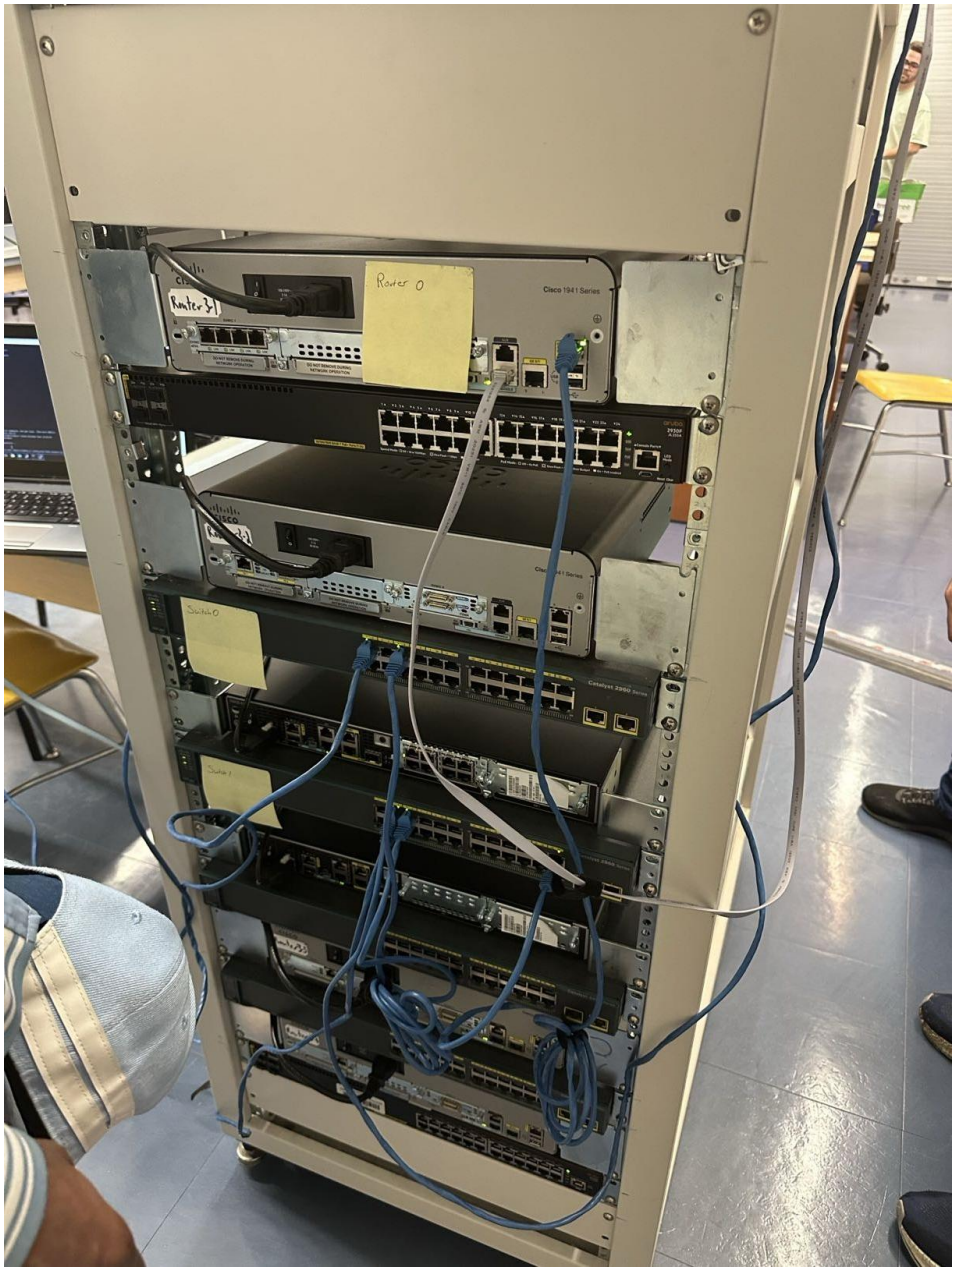
Router 0
Cisco 1941 Series
Switch 0
Catalyst 2960 Series

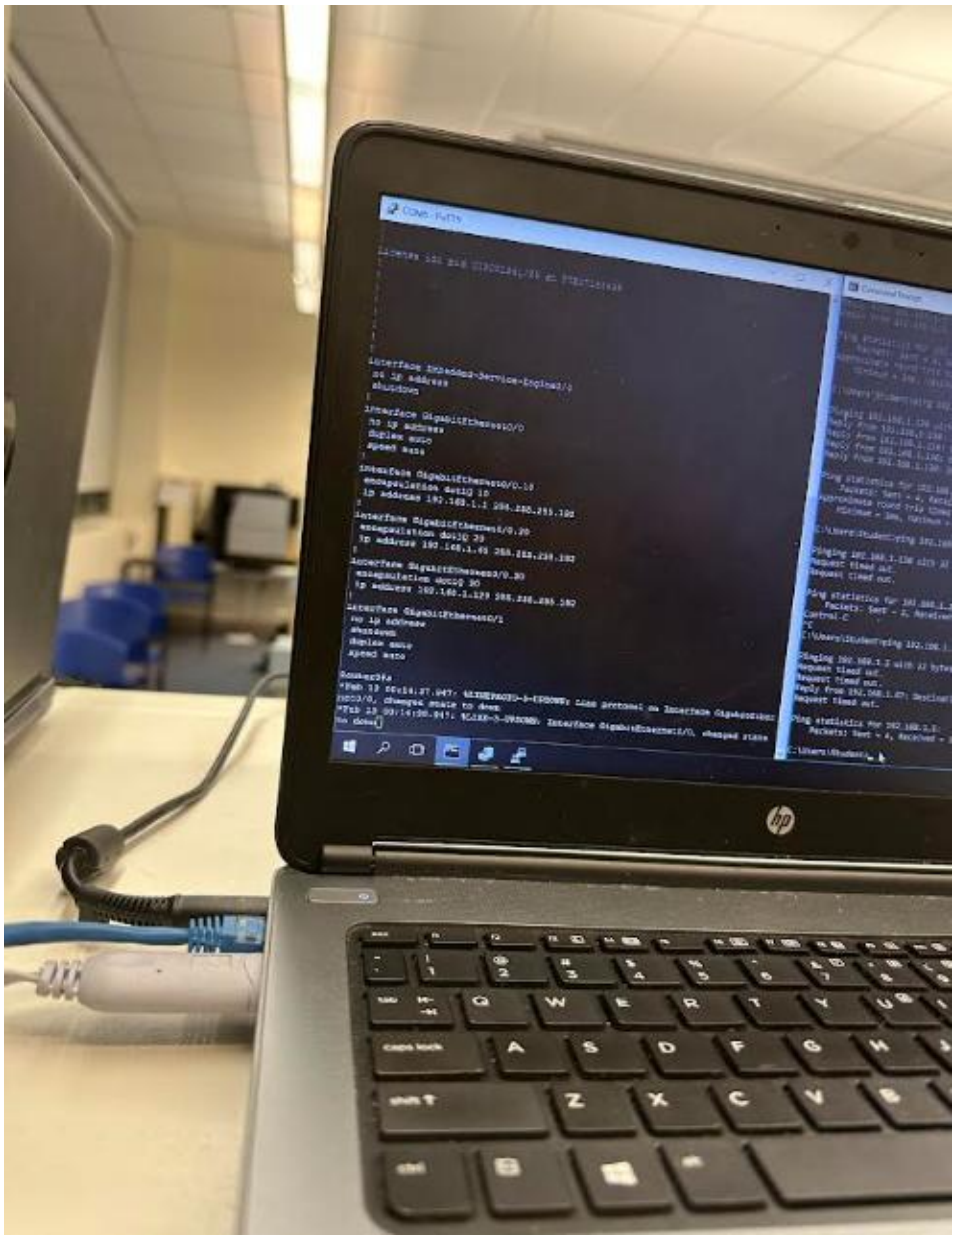

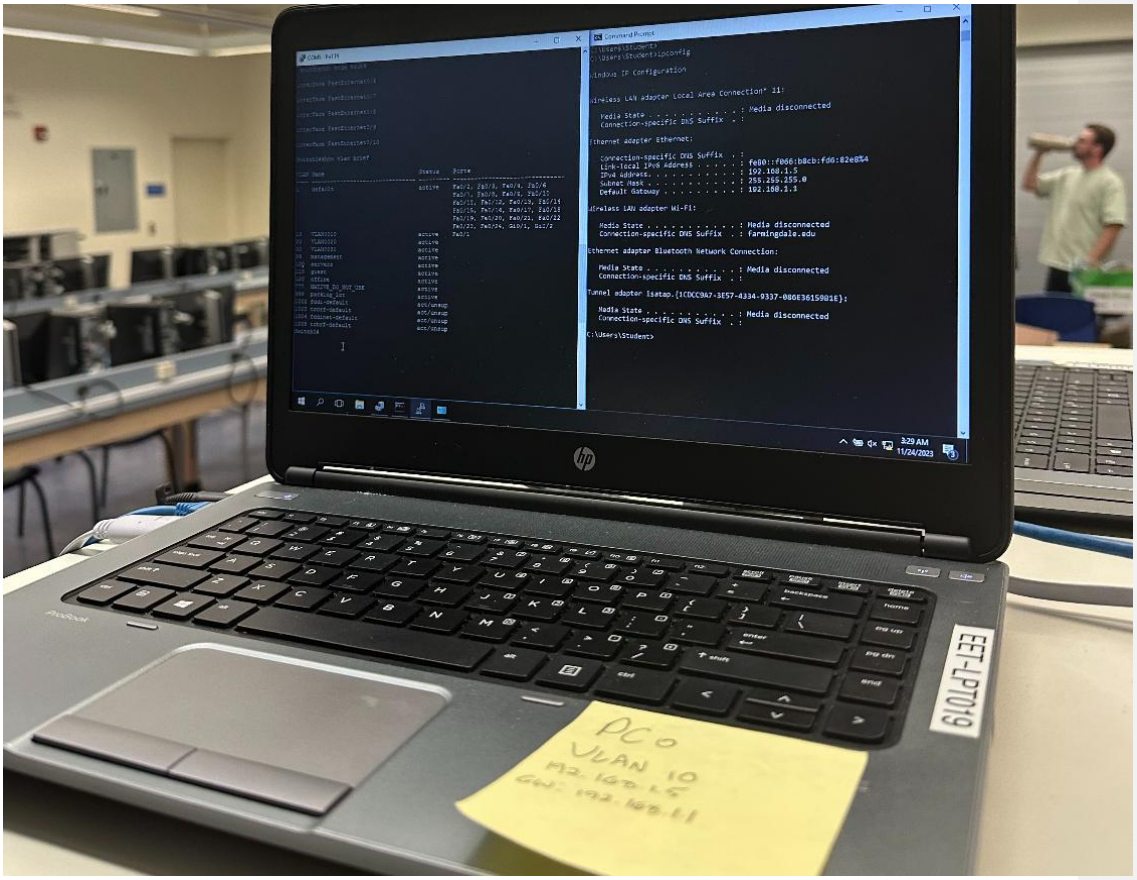
Command Prompt
C:\Users\Student>ipconfig
Windows IP Configuration
Wireless LAN adapter Local Area Connection* 11:
Media State . . . . . : Media disconnected
Connection-specific DNS Suffix . :
Ethernet adapter Ethernet:
Connection-specific DNS Suffix . :
Link-local IPv6 Address . . . . . : fe80::f006:b8cb:fd6:82e054
IPv4 Address. . . . . : 192.168.1.5
Subnet Mask . . . . . : 255.255.255.0
Default Gateway . . . . . : 192.168.1.1
Wireless LAN adapter Wi-Fi:
Media State . . . . . : Media disconnected
Connection-specific DNS Suffix . : farmingdale.edu
Ethernet adapter Bluetooth Network Connection:
Media State . . . . . : Media disconnected
Connection-specific DNS Suffix . :
Tunnel adapter isatap.{1CDCC9A7-3E57-4334-9337-080E36159018}:
Media State . . . . . : Media disconnected
Connection-specific DNS Suffix . :
C:\Users\Student>
3:29 AM
11/24/2023
EET-LPT019
PC 0
VLAN 10
192.168.1.5
GW: 192.168.1.1

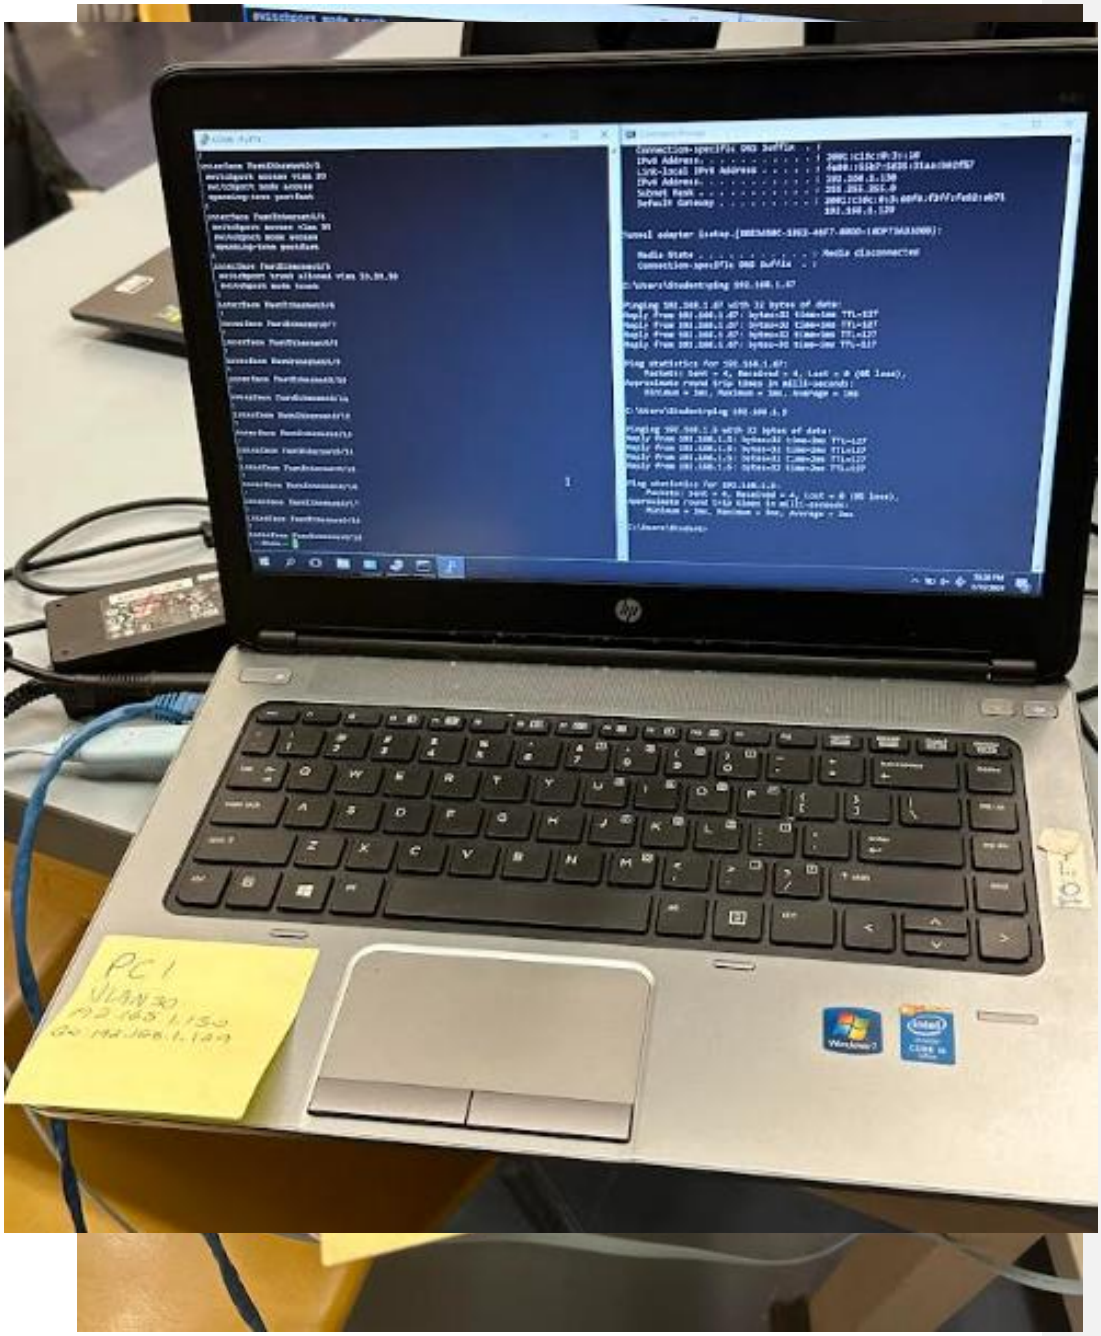
PC1
VLAN 30

<u>Router0 CLI</u>:

```
hostname Router0
!
!
!
!
!
!
!
!
ip cef
no ipv6 cef
!
!
!
!
license udi pid CISCO2811/K9 sn FTX1017DC78-
!
!
!
!
!
!
!
!
!
!
!
spanning-tree mode pvst
!
!
!
!
!
!
interface FastEthernet0/0
no ip address
duplex auto
speed auto
!
```

```
interface FastEthernet0/0.10
encapsulation dot1Q 10
ip address 192.168.1.1 255.255.255.192
!
interface FastEthernet0/0.20
encapsulation dot1Q 20
ip address 192.168.1.65 255.255.255.192
!
interface FastEthernet0/0.30
encapsulation dot1Q 30
ip address 192.168.1.129 255.255.255.192
!
interface FastEthernet0/1
no ip address
duplex auto
speed auto
shutdown
!
interface Vlan1
no ip address
shutdown
!
ip classless
!
ip flow-export version 9
!
!
!
!
line con 0
!
line aux 0
!
line vty 0 4
login
!
!
!
end
```

Switch0 CLI:

```
hostname Switch0
!
spanning-tree mode pvst
spanning-tree extend system-id
!
interface FastEthernet0/1
switchport access vlan 10
switchport mode access
spanning-tree portfast
!
interface FastEthernet0/2
!
interface FastEthernet0/3
switchport access vlan 10
switchport mode access
spanning-tree portfast
!
interface FastEthernet0/4
switchport access vlan 20
switchport mode access
spanning-tree portfast
!
interface FastEthernet0/5
switchport trunk allowed vlan 10,20,30
switchport mode trunk
!
interface FastEthernet0/6
switchport access vlan 30
switchport mode access
spanning-tree portfast
!
interface FastEthernet0/7
!
interface FastEthernet0/8
interface FastEthernet0/9
!
interface FastEthernet0/10
!
interface FastEthernet0/11
```

```
!
interface FastEthernet0/12
!
interface FastEthernet0/13
!
interface FastEthernet0/14
!
interface FastEthernet0/15
!
interface FastEthernet0/16
!
interface FastEthernet0/17
!
interface FastEthernet0/18
!
interface FastEthernet0/19
!
interface FastEthernet0/20
!
interface FastEthernet0/21
!
interface FastEthernet0/22
!
interface FastEthernet0/23
!
interface FastEthernet0/24
!
interface Vlan1
no ip address
shutdown
!
line con 0
line vty 0 4
login
line vty 5 15
login
!
!
end
```

Switch1 CLI:

```
hostname Switch1
!
spanning-tree mode pvst
spanning-tree extend system-id
!
interface FastEthernet0/1
switchport access vlan 10
switchport mode access
spanning-tree portfast
!
interface FastEthernet0/2
!
interface FastEthernet0/3
switchport access vlan 20
switchport mode access
spanning-tree portfast
!
interface FastEthernet0/4
switchport access vlan 30
switchport mode access
spanning-tree portfast
!
interface FastEthernet0/5
switchport trunk allowed vlan 10,20,30
switchport mode trunk
!
interface FastEthernet0/6
!
interface FastEthernet0/7
!
interface FastEthernet0/8
!
interface FastEthernet0/9
!
interface FastEthernet0/10
!
interface FastEthernet0/11
!
interface FastEthernet0/12
```

```
!
interface FastEthernet0/13
!
interface FastEthernet0/14
!
interface FastEthernet0/15
!
interface FastEthernet0/16
!
interface FastEthernet0/17
!
interface FastEthernet0/18
!
interface FastEthernet0/19
!
interface FastEthernet0/20
!
interface FastEthernet0/21
!
interface FastEthernet0/22
!
interface FastEthernet0/23
!
interface FastEthernet0/24
switchport trunk allowed vlan 10,20,30
switchport mode trunk
!
interface Vlan1
no ip address
shutdown
!
line con 0
!
line vty 0 4
login
line vty 5 15
login
!
end
```