Lab 4

In the physical configuration, everything is the same as the Cisco packet tracer topology. The only difference is that the firewalls were disabled on the PCs in the physical setup due to it blocking packets, causing the ping commands to fail. There was also no schematic since Cisco packet tracer doesn’t support Aruba switches.

Cisco Switch CLI:

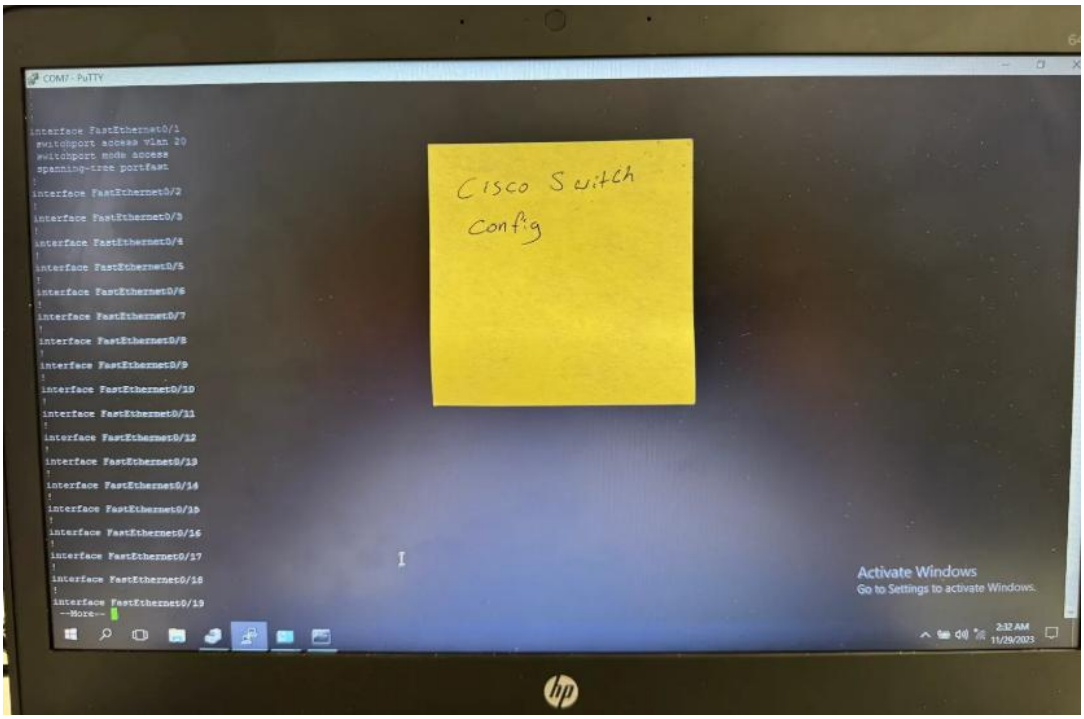

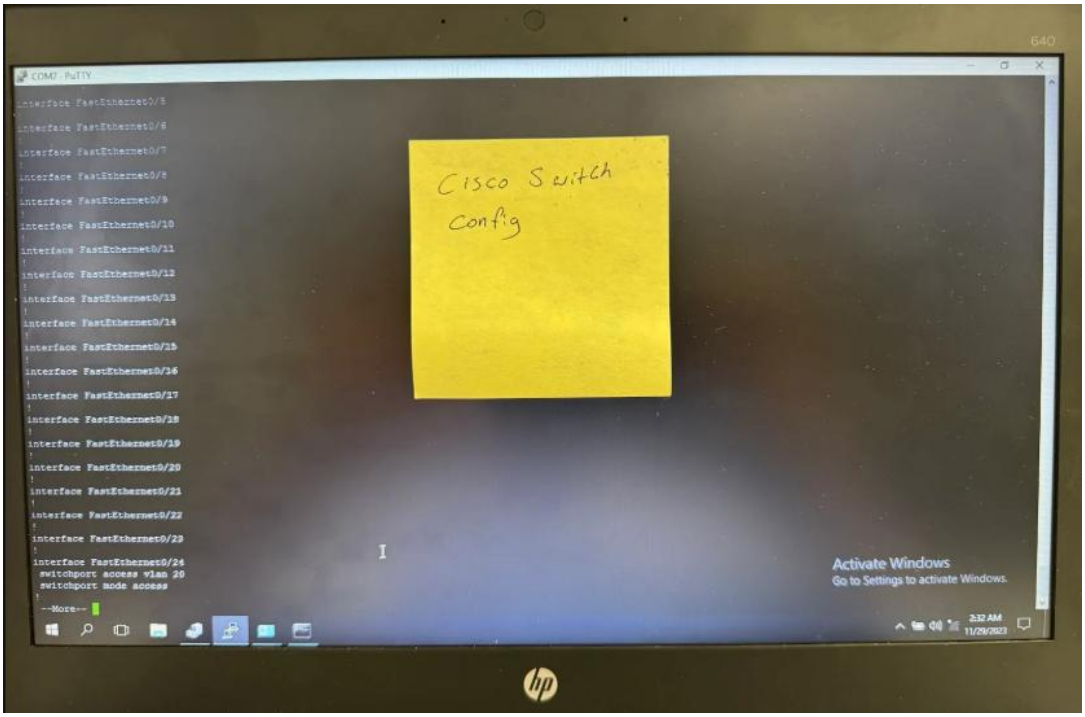

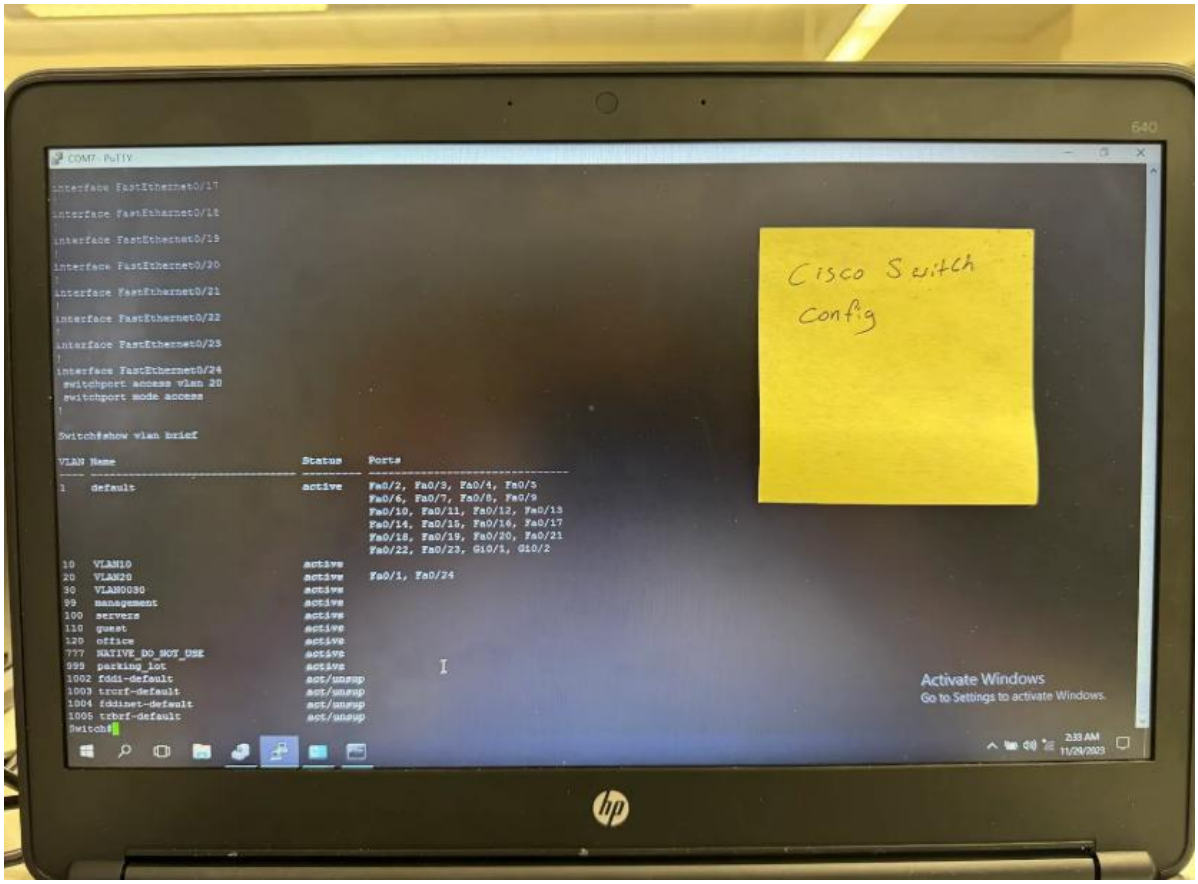
COM7 - PuTTY
interface FastEthernet0/17
interface FastEthernet0/18
interface FastEthernet0/19
interface FastEthernet0/20
interface FastEthernet0/21
interface FastEthernet0/22
interface FastEthernet0/23
interface FastEthernet0/24
switchport access vlan 20
switchport mode access
Switch#show vlan brief
VLAN Name Status Ports
1 default active Fa0/2, Fa0/3, Fa0/4, Fa0/5
Fa0/6, Fa0/7, Fa0/8, Fa0/9
Fa0/10, Fa0/11, Fa0/12, Fa0/13
Fa0/14, Fa0/15, Fa0/16, Fa0/17
Fa0/18, Fa0/19, Fa0/20, Fa0/21
Fa0/22, Fa0/23, Gi0/1, Gi0/2
10 VLAN10 active
20 VLAN20 active Fa0/1, Fa0/24
30 VLAN0030 active
99 management active
100 servers active
110 guest active
120 office active
777 NATIVE_DO_NOT_USE active
999 parking_lot active
1002 fddi-default act/unsup
1003 trcrf-default act/unsup
1004 fddinet-default act/unsup
1005 trbrf-default act/unsup
Switch#
Cisco Switch Config
Activate Windows
Go to Settings to activate Windows.
2:33 AM
11/29/2023
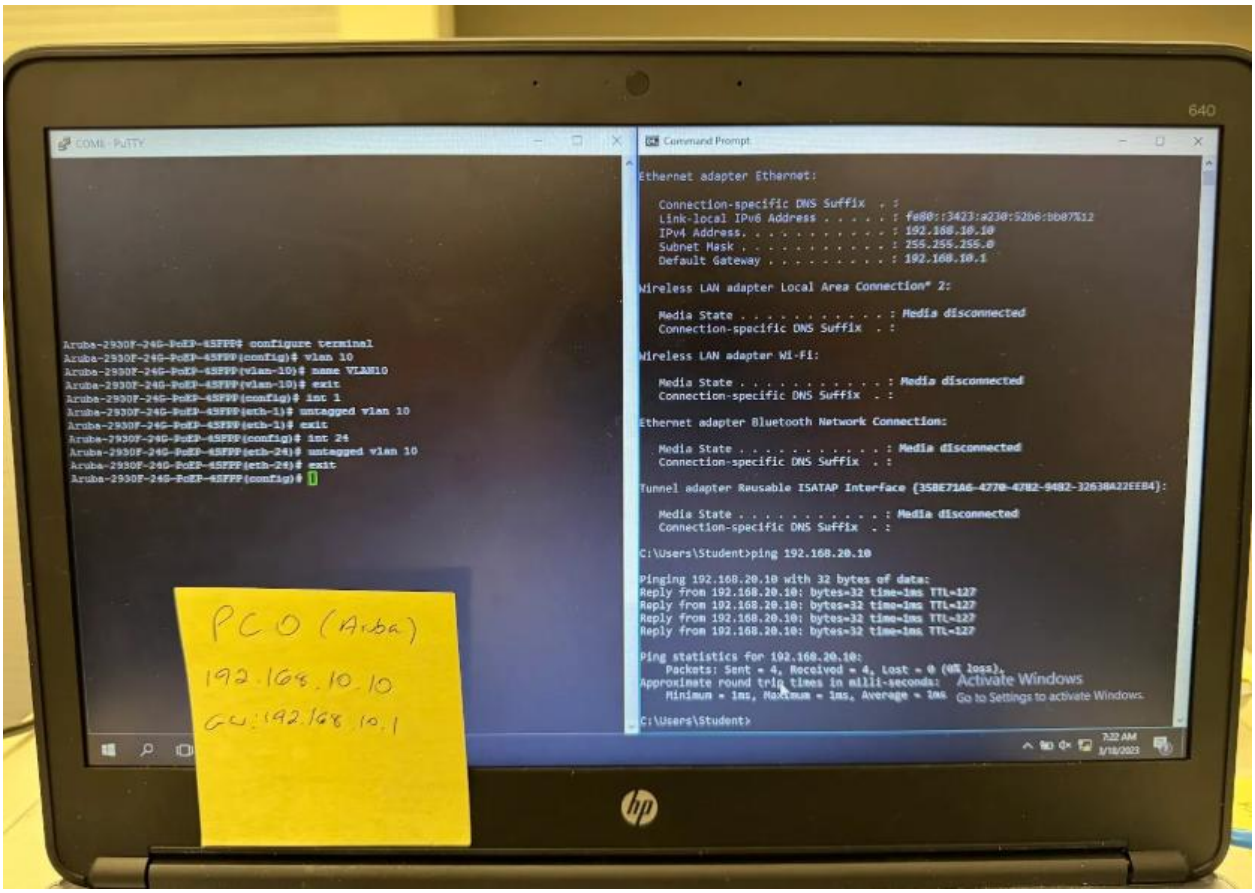
Aruba Switch CLI: