


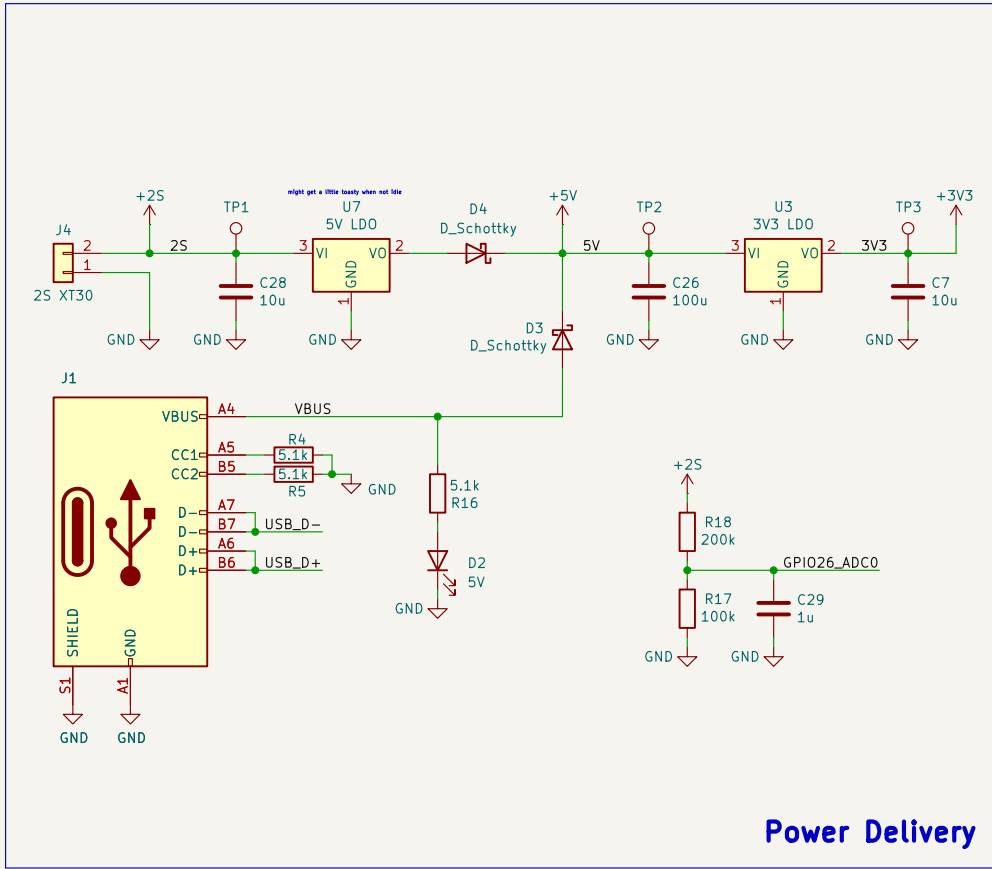

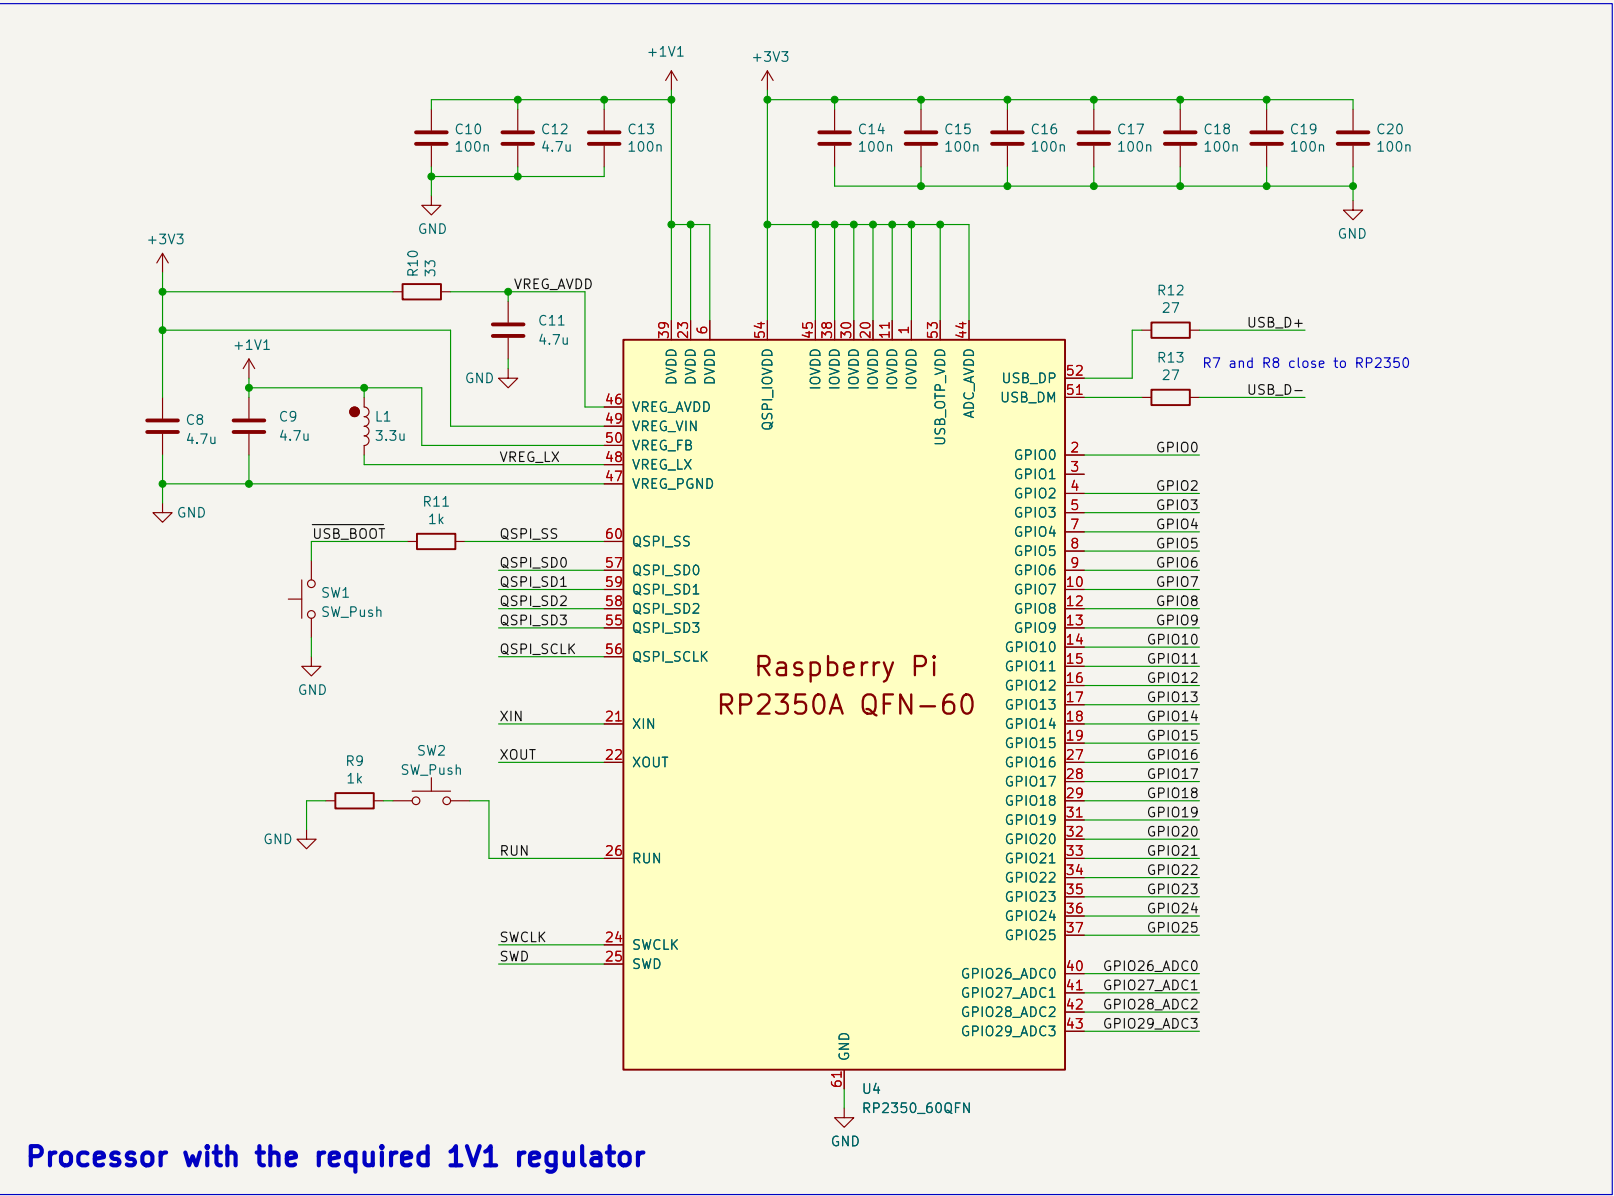
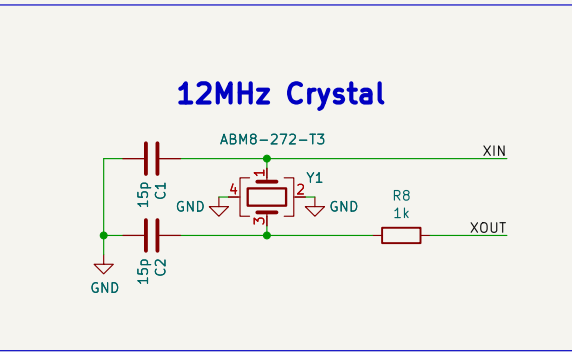
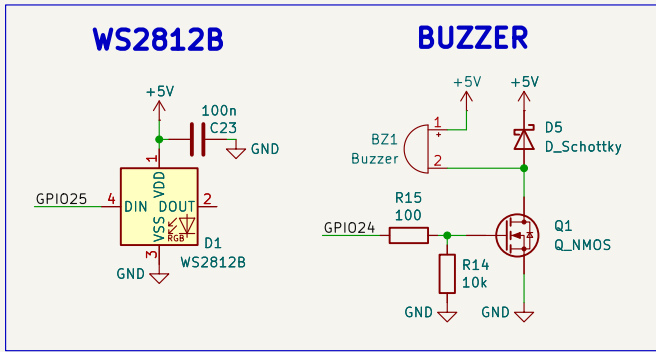
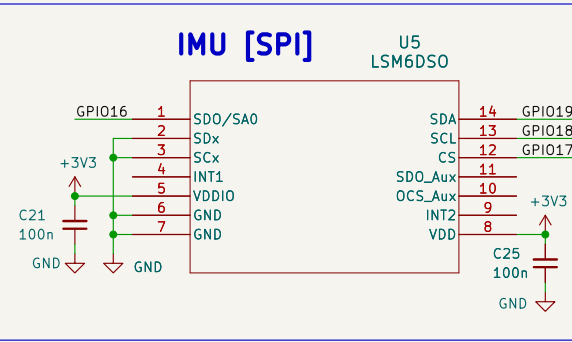
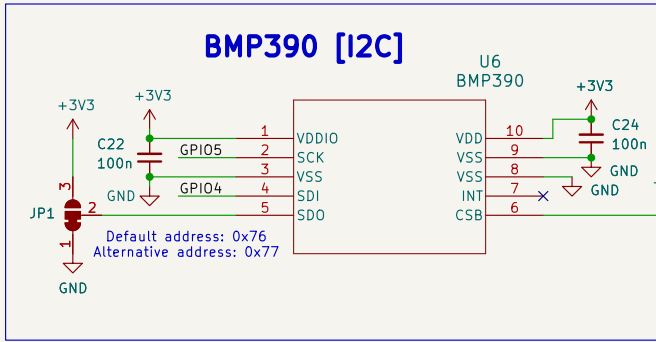


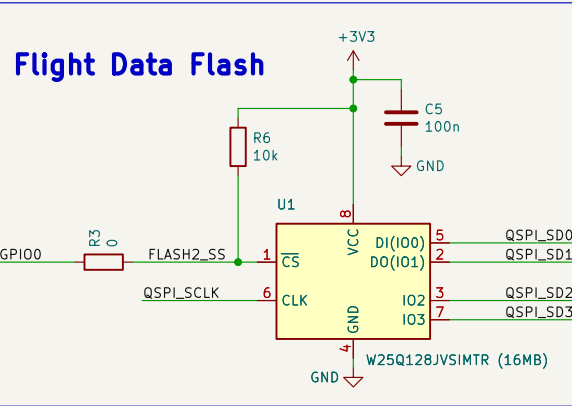

I2C1 PULLUPS

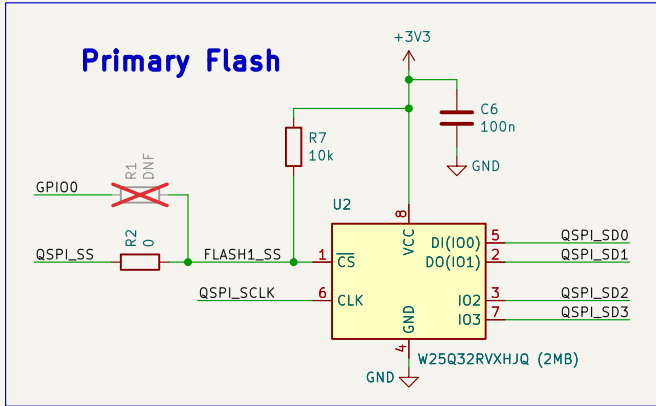

I2C0 PULLUPS



Processor with the required 1V1 regulator

| GPIO | FUNCTION                    |
|------|-----------------------------|
| 0    | Secondary Flash Chip Select |
| 1    |                             |
| 2    | I2C1_SDA                    |
| 3    | I2C1_SCL                    |
| 4    | I2C0_SDA                    |
| 5    | I2C0_SCL                    |
| 6    |                             |
| 7    |                             |
| 8    |                             |
| 9    |                             |
| 10   |                             |
| 11   |                             |
| 12   |                             |
| 13   |                             |
| 14   |                             |
| 15   |                             |
| 16   | IMU SPI0_RX [MISO]          |
| 17   | IMU SPI0_CS [CS]            |
| 18   | IMU SPI0_SCK [SCL]          |
| 19   | IMU SPI0_TX [MOSI]          |
| 20   |                             |
| 21   |                             |
| 22   |                             |
| 23   |                             |
| 24   | BUZZER TRIGGER              |
| 25   | WS2812B_SIGNAL              |
| 26   | BATTERY VOLTAGE ADC         |
| 27   | UNUSED ADC                  |
| 28   | UNUSED ADC                  |
| 29   | UNUSED ADC                  |