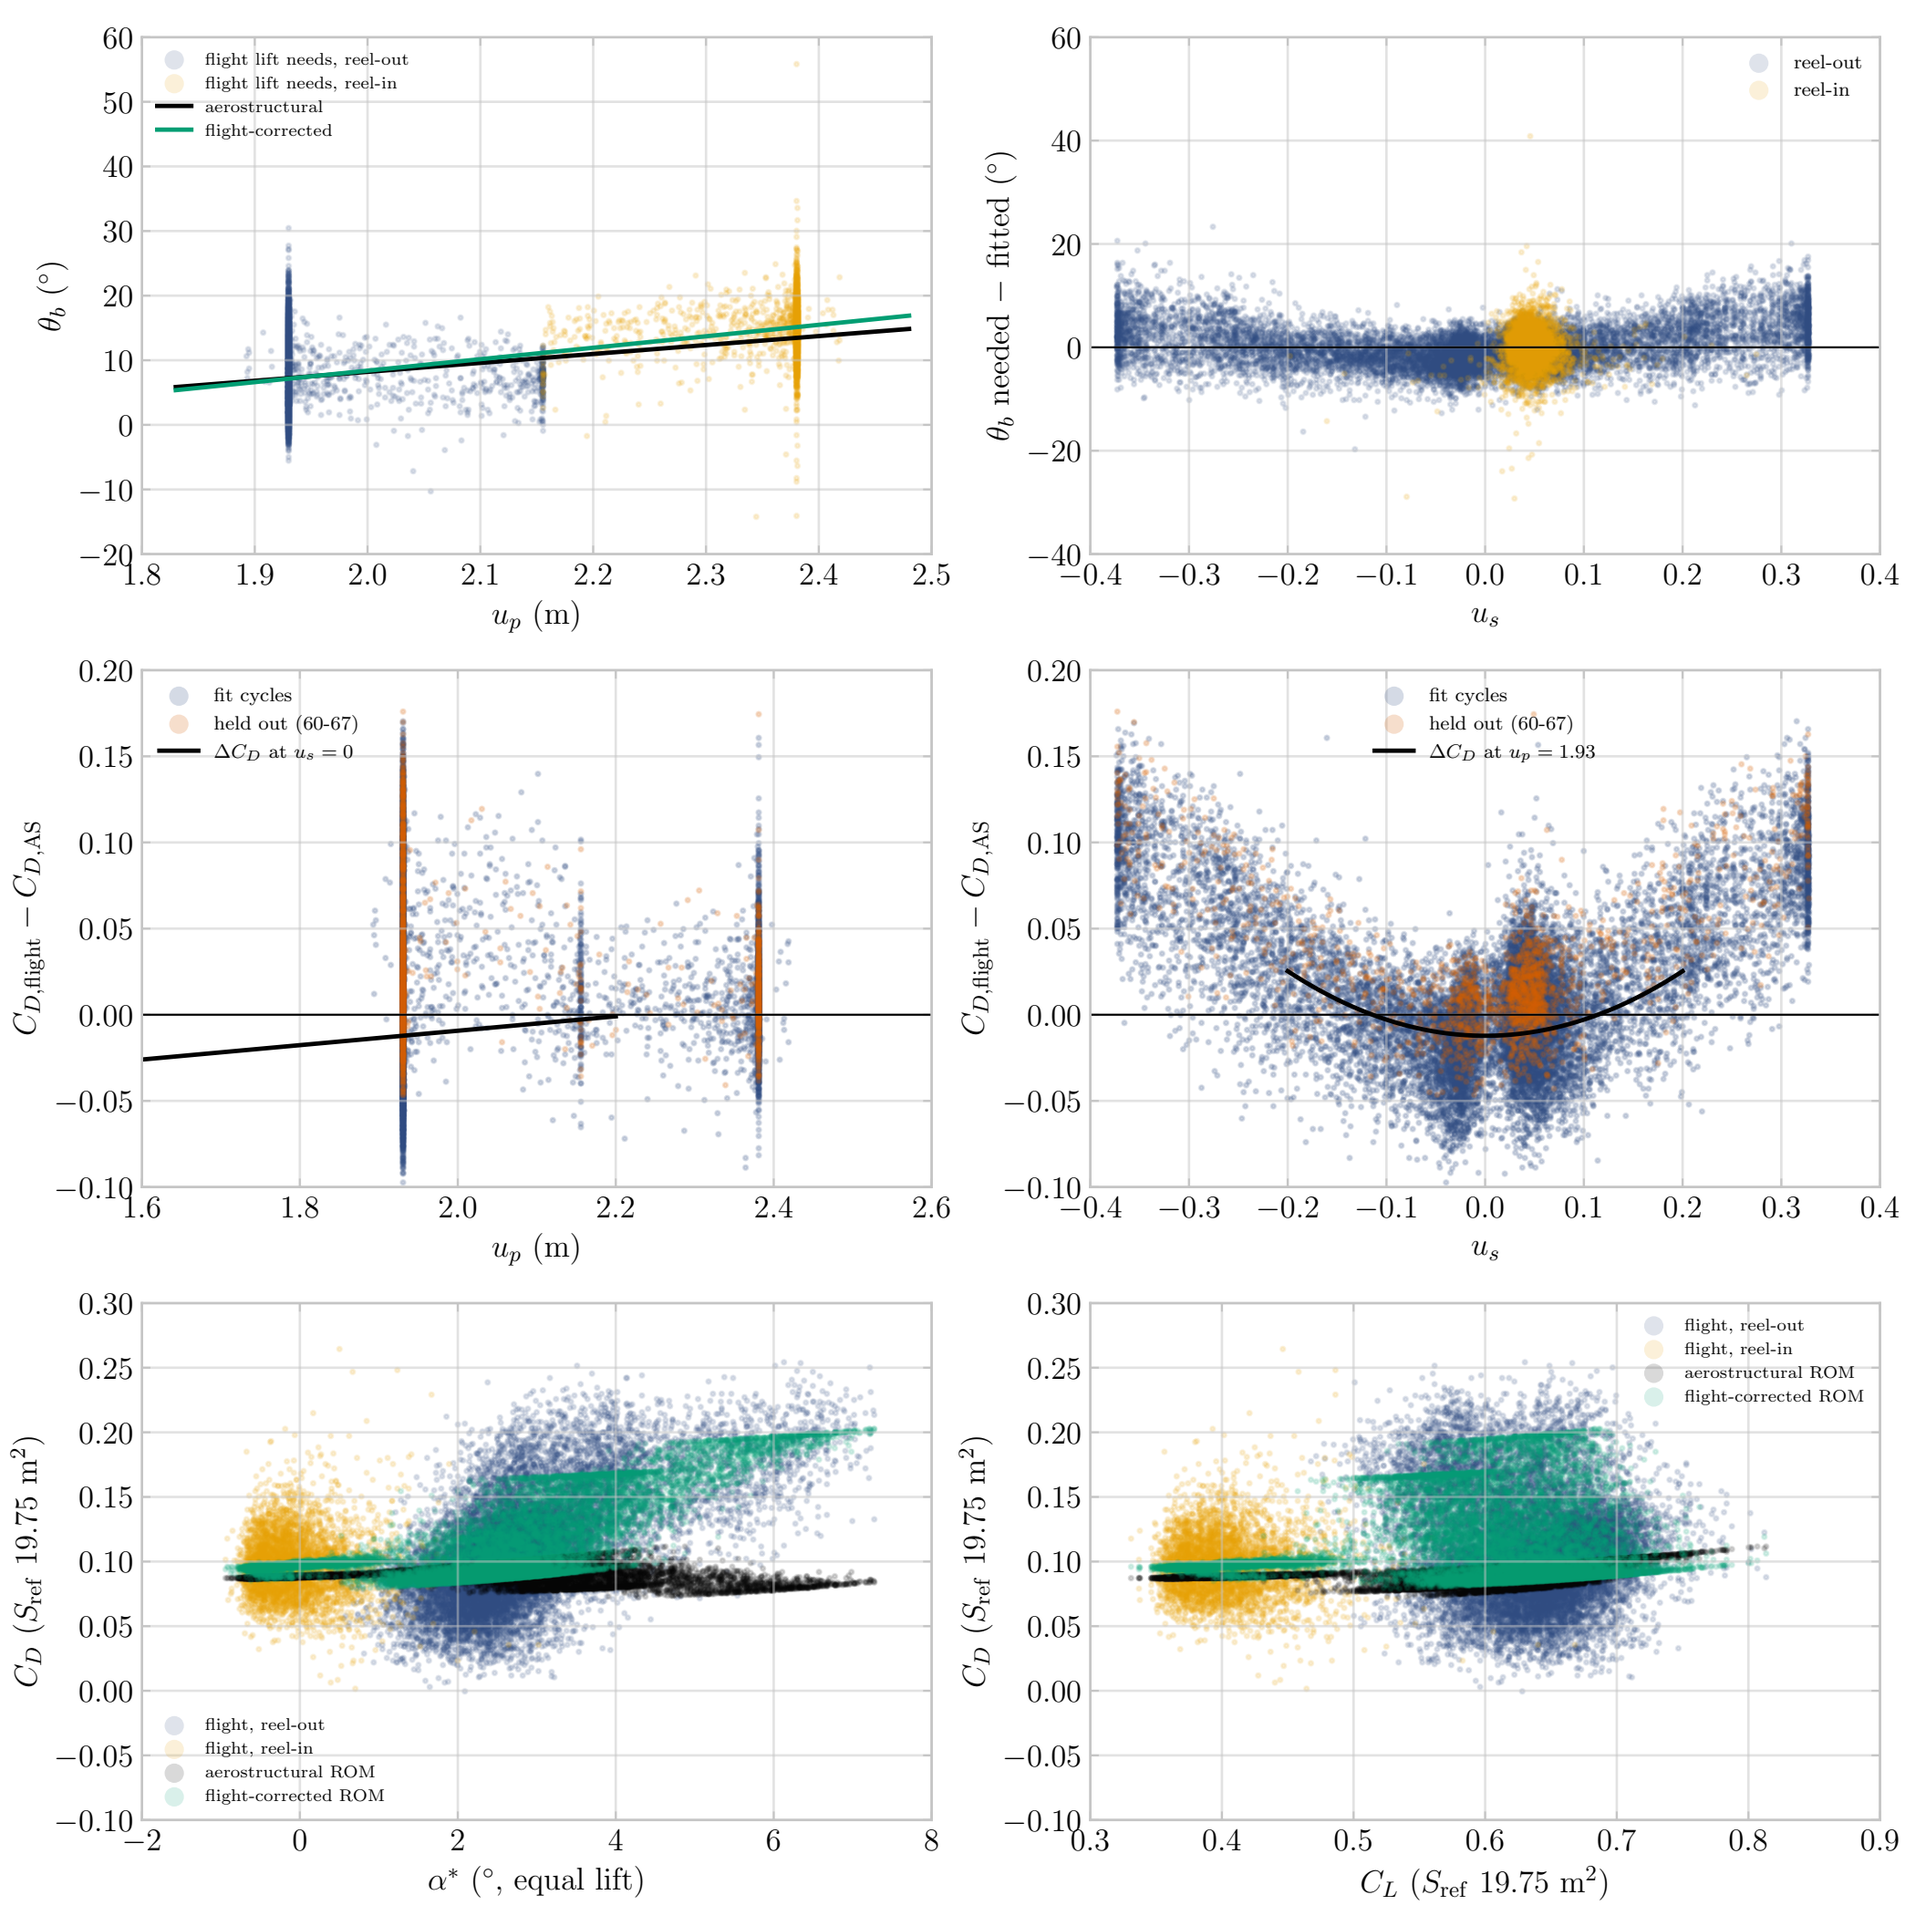

flight lift needs, reel-out
flight lift needs, reel-in
aerostructural
flight-corrected
θ_b (°)
u_p (m)
reel-out
reel-in
θ_b needed − fitted (°)
u_s
fit cycles
held out (60-67)
ΔC_D at $u_s = 0$
$C_{D,\text{flight}} - C_{D,\text{AS}}$
u_p (m)
fit cycles
held out (60-67)
ΔC_D at $u_p = 1.93$
$C_{D,\text{flight}} - C_{D,\text{AS}}$
u_s
flight, reel-out
flight, reel-in
aerostructural ROM
flight-corrected ROM
C_D (S_{ref} 19.75 m^2)
α^* (°, equal lift)
flight, reel-out
flight, reel-in
aerostructural ROM
flight-corrected ROM
C_D (S_{ref} 19.75 m^2)
C_L (S_{ref} 19.75 m^2)