

# PART NUMBER CODING





SBH41 - NBPB - D - - - ST - - -

NUMBER OF POSITIONS  
(CONTACTS PER ROW)

TERMINATION  
STRAIGHT

## COLOR

BK = BLACK  
YE = YELLOW  
RE = RED  
BL = BLUE  
GR = GREEN  
GY = GREY  
WH = WHITE  
OR = ORANGE

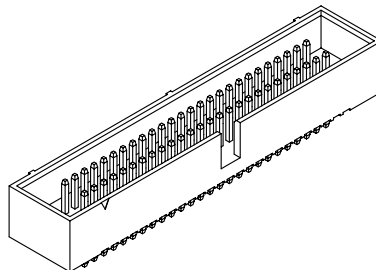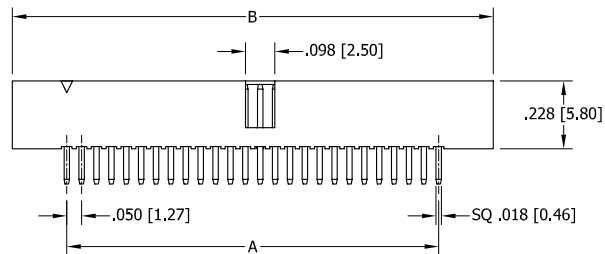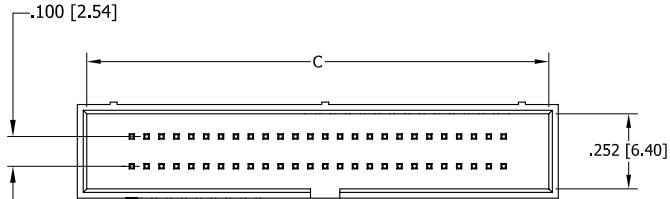


## NOTES:

1. INSULATOR MATERIAL: NYLON 6T.
2. CONTACT MATERIAL: BRASS.
3. PLATING: GOLD FLASH OVERALL.
4. OPERATING TEMPERATURE: -40°C ~ 85°C.
5. PROCESSING TEMP: 230°C FOR 60 SECONDS MAX.  
(260°C, 10 SEC.)
6. UL FLAMMABILITY RATING: 94V-0.
7. VOLTAGE RATING: 20m OHMS MAX.
8. CURRENT RATING: 1 AMP PER CONTACT.
9. VOLTAGE DROP: AC 500 V.
10. INSULATION RESISTANCE: 1000 MEGA OHMS.

## REVISIONS

REV.	ECO. NO	DESCRIPTION	DATE	BY
A	1682	INITIAL RELEASE	6/3/2008	VJ
B	1852	ADD RS DIM .100[2.54], UPDATE NOTE 3 & TOLERANCE BLOCK	11/13/2008	JH

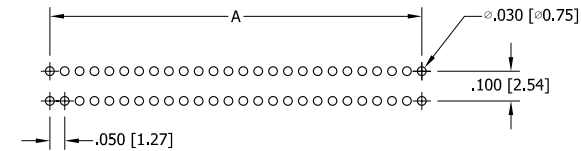


## RECOMMENDED PCB LAYOUT

PART NUMBER	POSITIONS/ CONTACTS	A		B		C	
		INCH	MM	INCH	MM	INCH	MM
SBH41-NBPB-D05-ST-	5/10	0.200	5.08	0.566	14.38	0.503	12.78
SBH41-NBPB-D06-ST-	6/12	0.250	6.35	0.616	15.65	0.553	14.05
SBH41-NBPB-D07-ST-	7/14	0.300	7.62	0.666	16.92	0.603	15.32
SBH41-NBPB-D08-ST-	8/16	0.350	8.89	0.716	18.19	0.653	16.59
SBH41-NBPB-D09-ST-	9/18	0.400	10.16	0.766	19.46	0.703	17.86
SBH41-NBPB-D10-ST-	10/20	0.450	11.43	0.816	20.73	0.753	19.13
SBH41-NBPB-D11-ST-	11/22	0.500	12.70	0.866	22.00	0.803	20.4
SBH41-NBPB-D12-ST-	12/24	0.550	13.97	0.916	23.27	0.853	21.67
SBH41-NBPB-D13-ST-	13/26	0.600	15.24	0.966	24.54	0.903	22.94
SBH41-NBPB-D14-ST-	14/28	0.650	16.51	1.016	25.81	0.953	24.21
SBH41-NBPB-D15-ST-	15/30	0.700	17.78	1.066	27.08	1.003	25.48
SBH41-NBPB-D16-ST-	16/32	0.750	19.05	1.116	28.35	1.053	26.75
SBH41-NBPB-D17-ST-	17/34	0.800	20.32	1.166	29.62	1.103	28.02
SBH41-NBPB-D18-ST-	18/36	0.850	21.59	1.216	30.89	1.153	29.29
SBH41-NBPB-D19-ST-	19/38	0.900	22.86	1.266	32.16	1.203	30.56
SBH41-NBPB-D20-ST-	20/40	0.950	24.13	1.316	33.43	1.253	31.83
SBH41-NBPB-D21-ST-	21/42	1.000	25.40	1.366	34.70	1.303	33.1
SBH41-NBPB-D22-ST-	22/44	1.050	26.67	1.416	35.97	1.353	34.37
SBH41-NBPB-D23-ST-	23/46	1.100	27.94	1.466	37.24	1.403	35.64
SBH41-NBPB-D24-ST-	24/48	1.150	29.21	1.516	38.51	1.453	36.91
SBH41-NBPB-D25-ST-	25/50	1.200	30.48	1.566	39.78	1.503	38.18
SBH41-NBPB-D26-ST-	26/52	1.250	31.75	1.616	41.05	1.553	39.45
SBH41-NBPB-D27-ST-	27/54	1.300	33.02	1.666	42.32	1.603	40.72
SBH41-NBPB-D28-ST-	28/56	1.350	34.29	1.716	43.59	1.653	41.99
SBH41-NBPB-D29-ST-	29/58	1.400	35.56	1.766	44.86	1.703	43.26
SBH41-NBPB-D30-ST-	30/60	1.450	36.83	1.816	46.13	1.753	44.53
SBH41-NBPB-D41-ST-	31/62	1.500	38.10	1.866	47.40	1.803	45.8
SBH41-NBPB-D32-ST-	32/64	1.550	39.37	1.916	48.67	1.853	47.07
SBH41-NBPB-D33-ST-	33/66	1.600	40.64	1.966	49.94	1.903	48.34
SBH41-NBPB-D34-ST-	34/68	1.650	41.91	2.016	51.21	1.953	49.61
SBH41-NBPB-D35-ST-	35/70	1.700	43.18	2.066	52.48	2.003	50.88
SBH41-NBPB-D36-ST-	36/72	1.750	44.45	2.116	53.75	2.053	52.15
SBH41-NBPB-D37-ST-	37/74	1.800	45.72	2.166	55.02	2.103	53.42
SBH41-NBPB-D38-ST-	38/76	1.850	46.99	2.216	56.29	2.153	54.69
SBH41-NBPB-D39-ST-	39/78	1.900	48.26	2.266	57.56	2.203	55.96
SBH41-NBPB-D40-ST-	40/80	1.950	49.53	2.316	58.83	2.253	57.23

UNLESS OTHERWISE SPECIFIED:  
DIMENSIONS ARE IN INCHES[MM]  
TOLERANCES:  
ANGULAR:  $\pm 1^\circ$   
.XX =  $\pm .008$  [0.20]  
-XXX =  $\pm .008$  [0.20]  
-XXXX =  $\pm .008$  [0.20]  
PARENTHEetical INFORMATION IS FOR  
REFERENCE ONLY

INTERPRET DIMENSIONS AND GEOMETRIC  
TOLERANCING  
PER: ANSI Y14.5-1984

DATE  
V. JARA 6/3/2008  
DRAWN  
THE INFORMATION HEREIN CONTAINS  
PROPRIETARY INFORMATION OF  
SULLINS ELECTRONICS AND IS NOT  
TO BE REPRODUCED, USED OR  
DISCLOSED TO OTHERS FOR ANY  
PURPOSE EXCEPT AS SPECIFICALLY  
AUTHORIZED IN WRITING BY AN  
OFFICER OF SULLINS ELECTRONICS.



**SULLINS**  
CONNECTOR SOLUTIONS  
DESCRIPTION  
BOX HEADER, .050[1.27]CC, .100[2.54]RS  
PART NUMBER  
SBH41-NBPB-D- -ST-  
SIZE DWG. NO.  
C 11105  
SCALE: NONE  
REV B  
SHEET 1 OF 1

RoHS COMPLIANT