
## **IPv6 Access Control Lists**



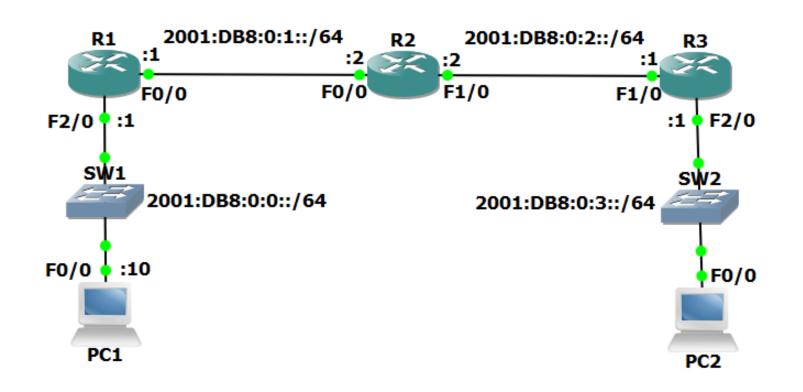

## **IPv6 Access Control Lists**

To only allow the administrator PC1 to send Telnet traffic through R2:

```
R2(config)#ipv6 access-list F0/0_in
R2(config-ipv6-acl)#permit tcp host 2001:db8::10 any eq telnet
R2(config-ipv6-acl)#deny tcp any any eq telnet
R2(config-ipv6-acl)#permit ip any any
R2(config-ipv6-acl)#exit
R2(config)#int f0/0
R2(config-if)#ipv6 traffic-filter F0/0_in in
```

