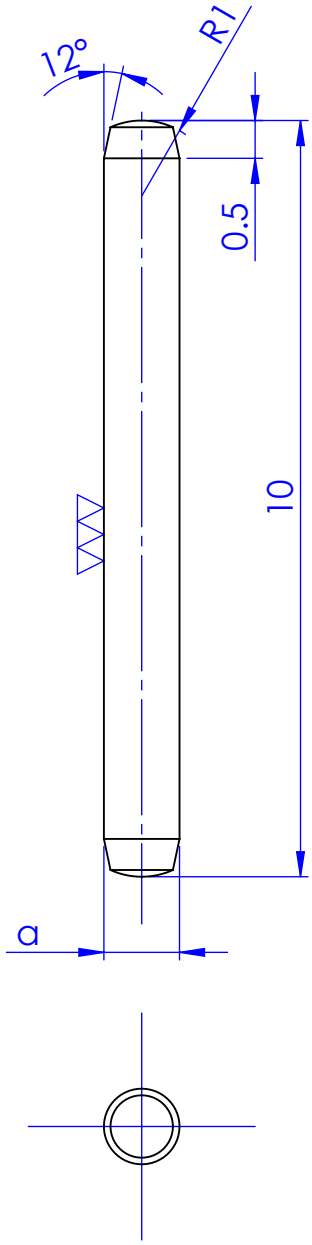


| Pos | a |
|---|---|
| 1 | 0.99 - 1.0 |
| 2 | above 1.0 - 1.01 |
| 3 | above 1.01 - 1.02 |
| 4 | above 1.02 - 1.03 |

| | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| Qty | 1 | | | | | | | | | |
| Type | I | | | | | | | | | |
| Tolerances in um = 1/1000 mm | | | | | | | | | | |
| Max. Deviation tolerated. Dimensional: ±100 um | | | | | | | | | | |
| Max. Deviation tolerated. Angular : | | | | | | | Chg.Nr. | Change | Date | Signed |
| * Sweeping attack max: 20 um ◇ Lateral runout max: 20 um | | | | | Material: Nichtr.harlh.St.Sainless 32. Geschl ∅ 1 | | Scale | Drawn | T.V.N | |
| Without * Sweeping attack max:- Without ◇Lateral runout max: | | | | | Type: I | Group | 10:1 | Checked | CODY | |
| Prevailing Surface finish ▽▽ (▽▽▽) | | | | | Cylindrical Pin | | | Approved | CODY | |
| Surface treatment - | | | | | | | | | | |
| Heat treatment Tempered | | | | | Assembly Number: 10231 | | ReCurta | 10148-2 | | |