







Rating	10(4)A 250V AC   16A 125V AC 10A 250V AC 	Mounting Hole	
Contact Resistance	50m ohm Max.		
Insulation Resistance	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Operation Temperature	-20°~85°		
Operation Force	800g±200g		
Switch Function	4P DPST ON-OFF (Illuminated)	Panel Thickness: 2.0~3.0	Panel Thickness: 0.7~3.0








\*Material

Frame: Nylon#66, Black

Lens: PC

Terminal: Copper alloy, Silver plated

Diagram

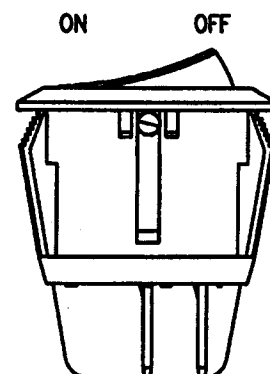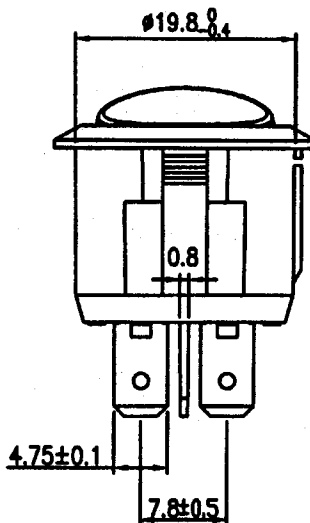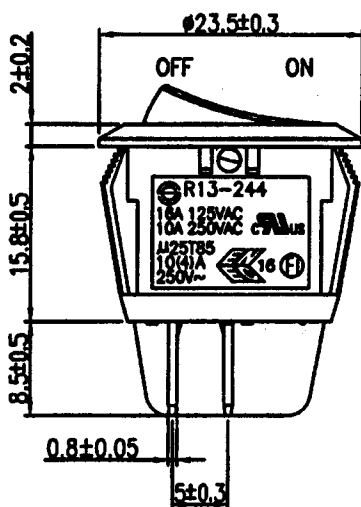

1822466	Red	Yellow clear
1821915	Red	Red clear
1821909	Green	Green clear
SCI NO.	Neon Light Color	Lens Color

D\Projects\R13-244

7/3/'07	黃衛東	Update the frame's engraving			△
Date	Name	Description			NO
Drawn	Checked	Approved	SCI No.	See Table	Model Name
黃衛東	研發部 黃衛東		Customer No.		ROCKER SWITCH
7/3/'07	李元生		Unit	mm	Model No.
					R13-244B-02
© SHIN CHIN INDUSTRIAL CO., LTD.					