

waterboiler

STOP_BTN negated to become TRUE when pressed, stopping/breaking the RUN_STATE logic.


START_BTN is pressed, closing the connection to STATUS_RUN RUN_STATE.

RUN_STATE is parallel to START_BTN, this is an OR gate and works as a latch.

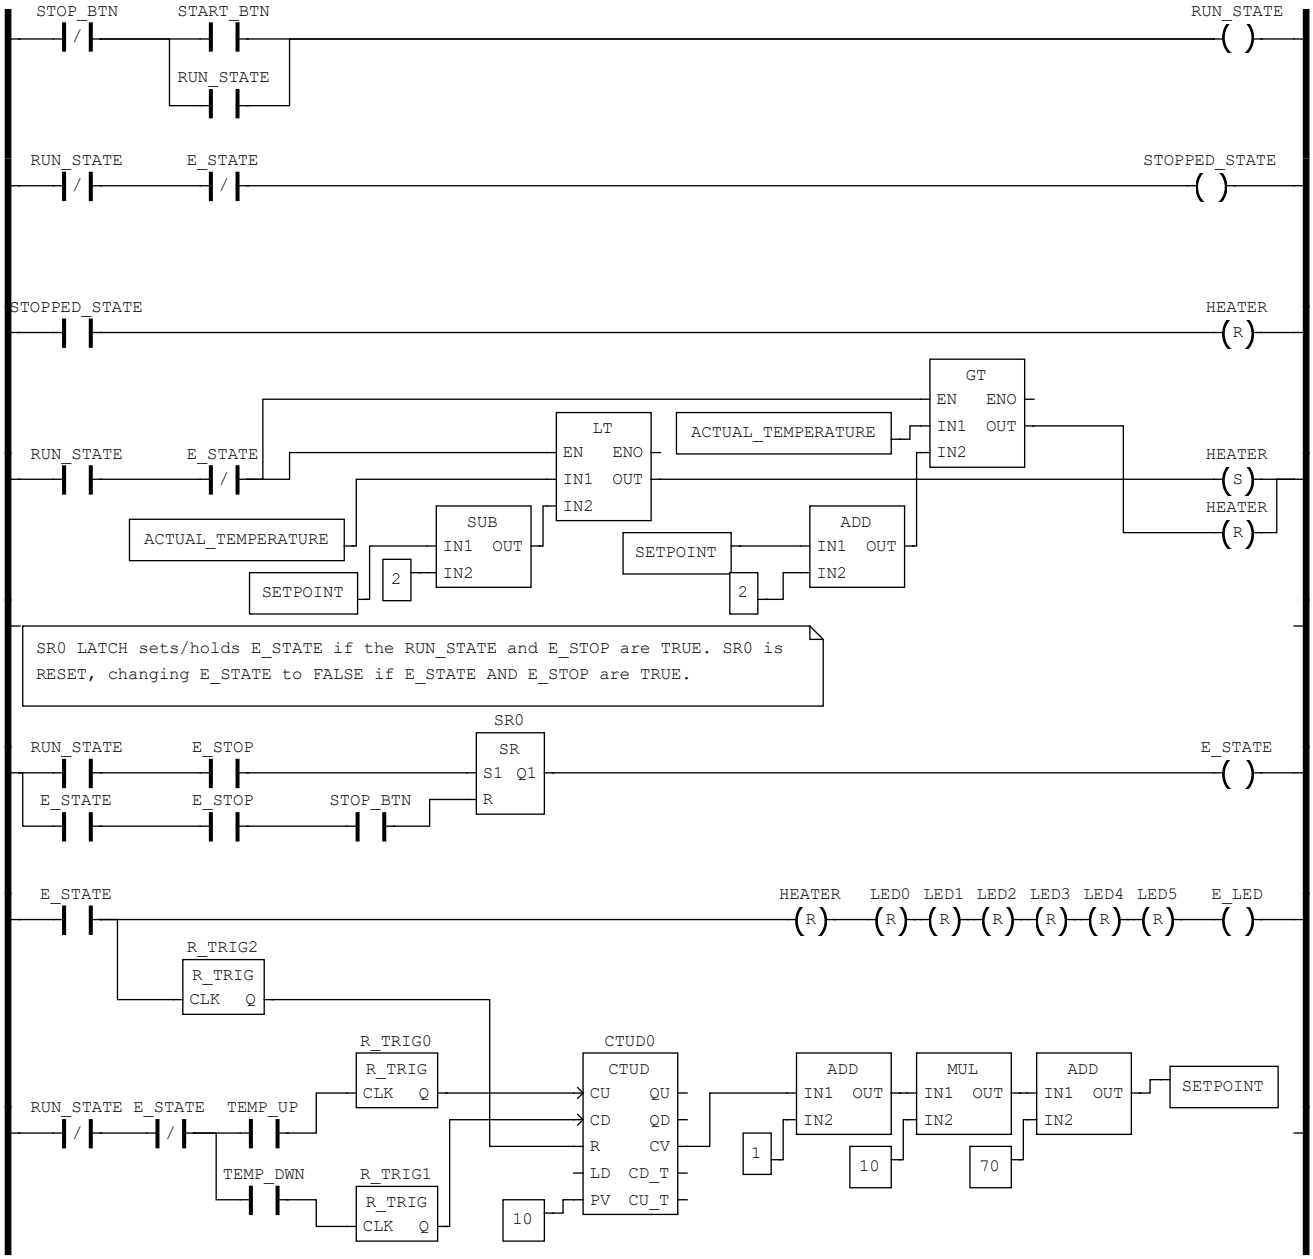


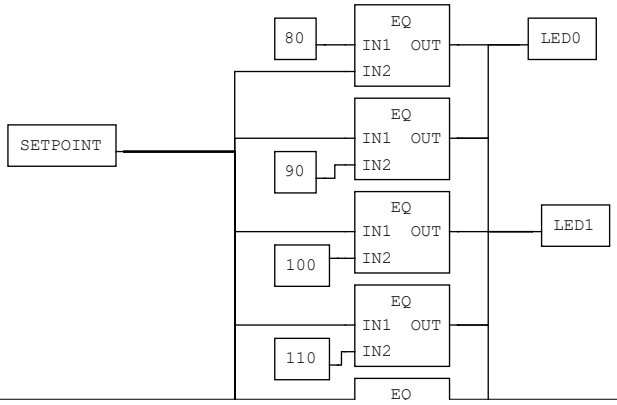




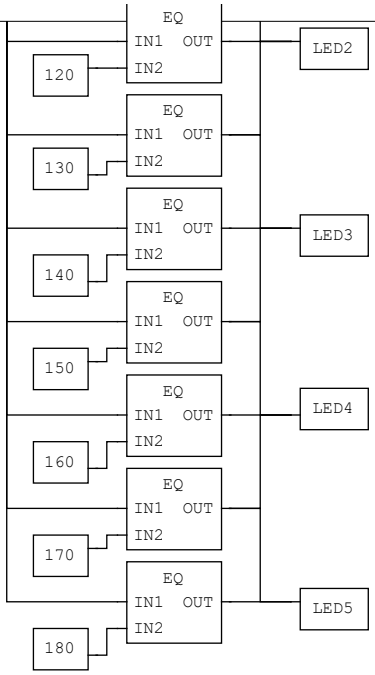



dial - min reading / max reading x 170 + 20 (190c) = actual_temperature

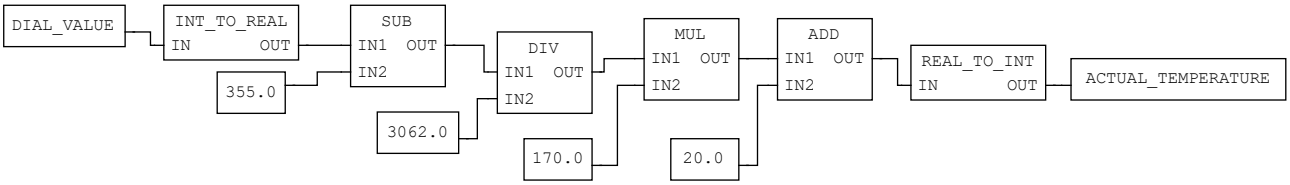


v / 65535 * 190

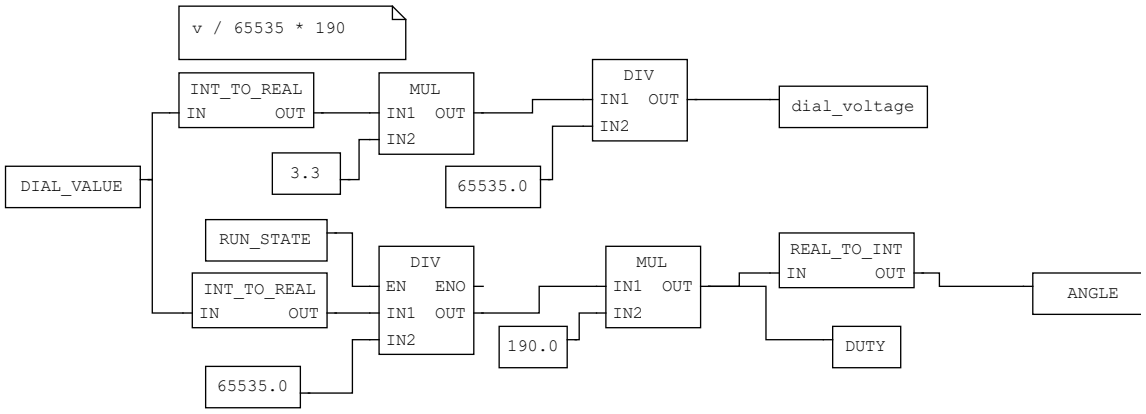

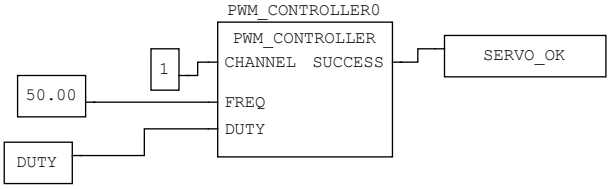

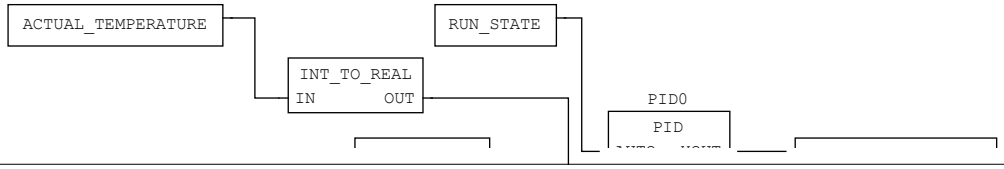

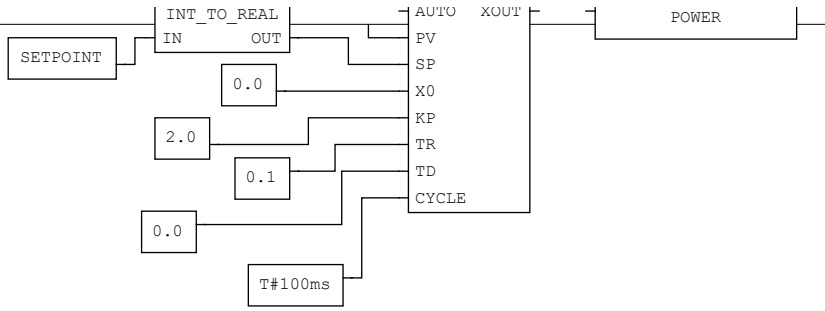
INT_TO_REAL
IN
OUT
SETPOINT
0.0
2.0
0.1
0.0
T#100ms
AUTO
XOUT
PV
SP
X0
KP
TR
TD
CYCLE
POWER