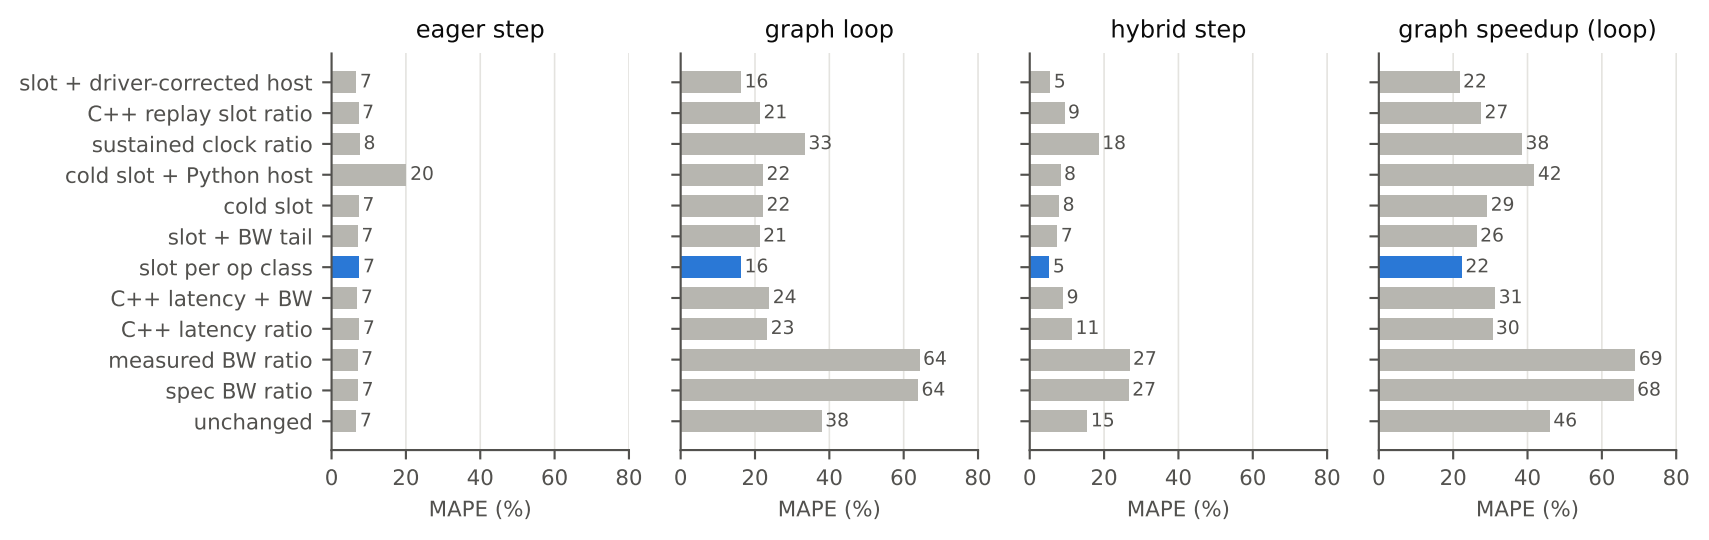
eager step
graph loop
hybrid step
graph speedup (loop)
slot + driver-corrected host
C++ replay slot ratio
sustained clock ratio
cold slot + Python host
cold slot
slot + BW tail
slot per op class
C++ latency + BW
C++ latency ratio
measured BW ratio
spec BW ratio
unchanged
7
7
8
20
7
7
7
7
7
7
7
7
16
21
33
22
22
21
16
24
23
64
64
38
5
9
18
8
8
7
5
9
11
27
27
15
22
27
38
42
29
26
22
31
30
69
68
46
0
20
40
60
80
MAPE (%)