



File Name	Specification For 4.3" SVGA EPD	Module Number	GDE043A2
Version	A/0	Page Number	1 of 17

Specification For 4.3"SVGA EPD

Model NO.:GDE043A2

Prepared by	Checked by	Approved by

Customer approval

Customer	Approved by	Date of approval



File Name	Specification For 4.3" SVGA EPD	Module Number	GDE043A2
Version	A/0	Page Number	2 of 17

Version	Content	Date	Producer
A/0	New release	2012/08/24	Jasam Chen



File Name	Specification For 4.3" SVGA EPD	Module Number	GDE043A2
Version	A/0	Page Number	3 of 17

Contents

1. General Description.....	4
2. Features.....	4
3. Application	4
4. Pin Assignment.	5
5. Eletrical Characteristics	6
6. Power On Sequence	9
7. Mechanical Characteristics	10
8. Optical Specification	12
9. Handling, Safety, and Enviromental Requirements.....	13
10. Reliability Testing.....	14
11. Block Diagram.....	15
12. Packaging.....	16
13. Mark and Bar Code definition	17



File Name	Specification For 4.3" SVGA EPD	Module Number	GDE043A2
Version	A/0	Page Number	4 of 17

1 General Description

GDE043A2 is an Active Matrix Electrophoretic Display(AM EPD), High-Resolution AM TFT Black/White display module can be used in portable electronic devices, such as E-book Reader.

The module is a TFT-array driving electrophoretic display, with integrated circuits including source and gate drivers.

The resolution of the module is 800×600 (SVGA), and the active area is 4.3 inch diagonal.

2 Features

- ◆ 800×600 display
- ◆ White Reflectance above 35%
- ◆ Contrast Ratio above 8:1
- ◆ 4:3 aspect ratio
- ◆ 230 dpi
- ◆ Wide viewing angle
- ◆ Ultra low power consumption
- ◆ Reflective mode
- ◆ Bi -stable display
- ◆ Commercial temperature range
- ◆ Landscape, portrait modes
- ◆ Hard-coat antiglare display surface

3 Application

E-book reader.



File Name	Specification For 4.3" SVGA EPD	Module Number	GDE043A2
Version	A/0	Page Number	5 of 17

4 Input/output pin assignment

1	VNEG	Negative power supply source driver
2	VPOS	Positive power supply source driver
3	VSS	Ground
4	VDD	Digital power supply drivers
5	CLK	Clock source driver
6	LE	Latch enable source driver
7	OE	Output enable source driver
8	SHR	Shift direction source driver
9	SPH	Start pulse source driver
10	D0	Data signal source driver
11	D1	Data signal source driver
12	D2	Data signal source driver
13	D3	Data signal source driver
14	D4	Data signal source driver
15	D5	Data signal source driver
16	D6	Data signal source driver
17	D7	Data signal source driver
18	VCOM	Common connection
19	VGH	Positive power supply gate driver
20	VGL	Negative power supply gate driver
21	GMODE2	Output mode selection gate driver (H)
22	GMODE1	Output mode selection gate driver (H)
23	L/R	Shift direction gate driver
24	STV	Start pulse gate driver
25	CPV	Shift clock input
26	VBORDER	Border connection



File Name	Specification For 4.3" SVGA EPD	Module Number	GDE043A2
Version	A/0	Page Number	6 of 17

5 Electrical Characteristics

5.1 Module interface description

This module can be driven by ASIC AVT6201A Timing Controller(T-Con).

5.2 Module DC characteristics

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Signal ground	VSS		-	0	-	V
Logic Voltage supply	VDD		3.0	3.3	3.6	V
	IVDD	VDD=3.3V		-		uA
Gate Positive supply	VGH		7	-	VGL+42	V
	IVGH			100		uA
Gate Negative supply	VGL		-25	-	-5	V
	IVGL			100		uA
Source Positive supply	VPOS		-0.3	15	20	V
	INEG	VPOS=-15V	-	14	-	mA
Source Negative supply	VNEG		-16	-15	-10	V
	IPOS	VNEG=15V		-14		mA
Asymmetry source	VASYM	VPOS+VNEG	-80	0	80	mV
Common voltage	VCOM		-2.5	Adjusted	0	V
	ICOM		-	0.8	-	mA
Standby power module	PSTBY			-	0.26	mW
Typical power module	PTYP		-	260	800	mW
Operating temperature			0		50	°C
Storage temperature			-20	-	70	°C
Maximum image update time at 25°C				960	1200	ms

Notes:

- 1.The maximum power and maximum current are specified for the worst case power consumption.
- 2.The typical power is measured when “typical images” are displayed.
3. The standby power is the consumed power when the module controller is in standby mode.
4. The listed electrical/optical characteristics are only guaranteed under the controller & waveform provided by Good Display.



File Name	Specification For 4.3" SVGA EPD	Module Number	GDE043A2
Version	A/0	Page Number	7 of 17

5.3 Module AC characteristics


Note: VDD=3.0V to 3.6V, unless otherwise specified

Parameter	Symbol	Min.	Typ.	Max.	Unit	App Pin
Clock frequency	fcpv			200	kHz	CPV
Clock CPV high time	tCPVh	0.5	–	–	us	
Clock CPV low time	tCPVl	0.5	–	–	us	
Data setup time	tSU	100	–	–	ns	CPV STV
Data hold time	tH	300	–	–	ns	
Clock CLK cycle time	tclk	40	–	–	ns	Below table
D0 .. D7, SPH setup time	tsu	8	–	–	ns	
D0 .. D7, SPH hold time	th	8	–	–	ns	
LE on delay time	tLEdly	40	–	–	ns	
LE high-level pulse width	tLEw	40	–	–	ns	
LE off delay time	tLEoff	40	–	–	ns	
SHR setup time	tMsu	100	–	–	ns	
SHR hold time	tMh	10	–	–	ns	




File Name	Specification For 4.3" SVGA EPD	Module Number	GDE043A2
Version	A/0	Page Number	8 of 17

Clock & Data Timing

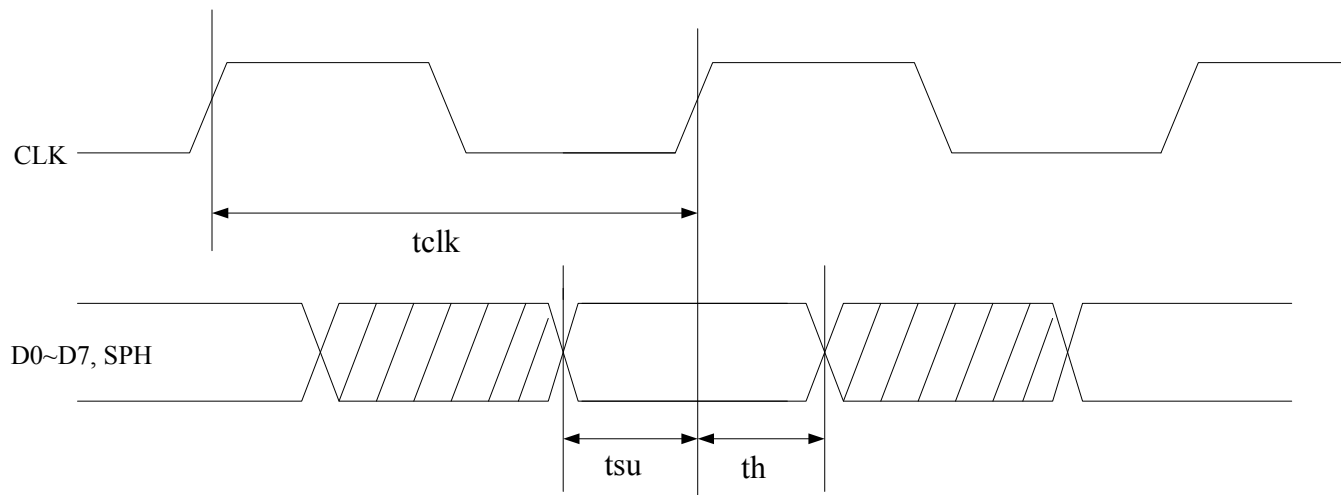

Output Latch/Control Signals

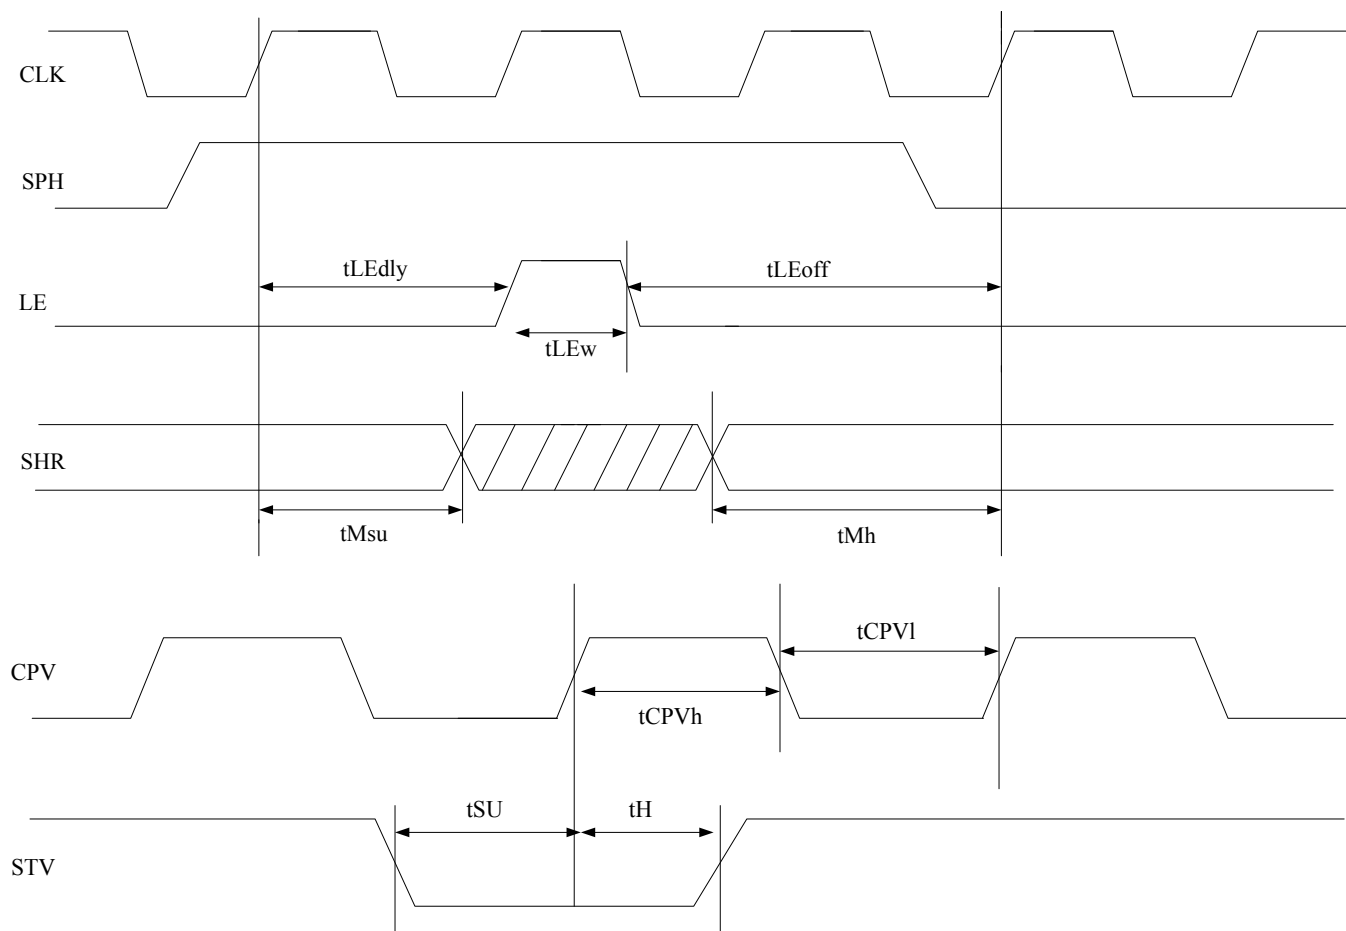




File Name	Specification For 4.3" SVGA EPD	Module Number	GDE043A2
Version	A/0	Page Number	9 of 17

6 Power On Sequence

VDD -> VNEG -> VPOS (Source Driver)

VGL -> VGH (Gate Driver)

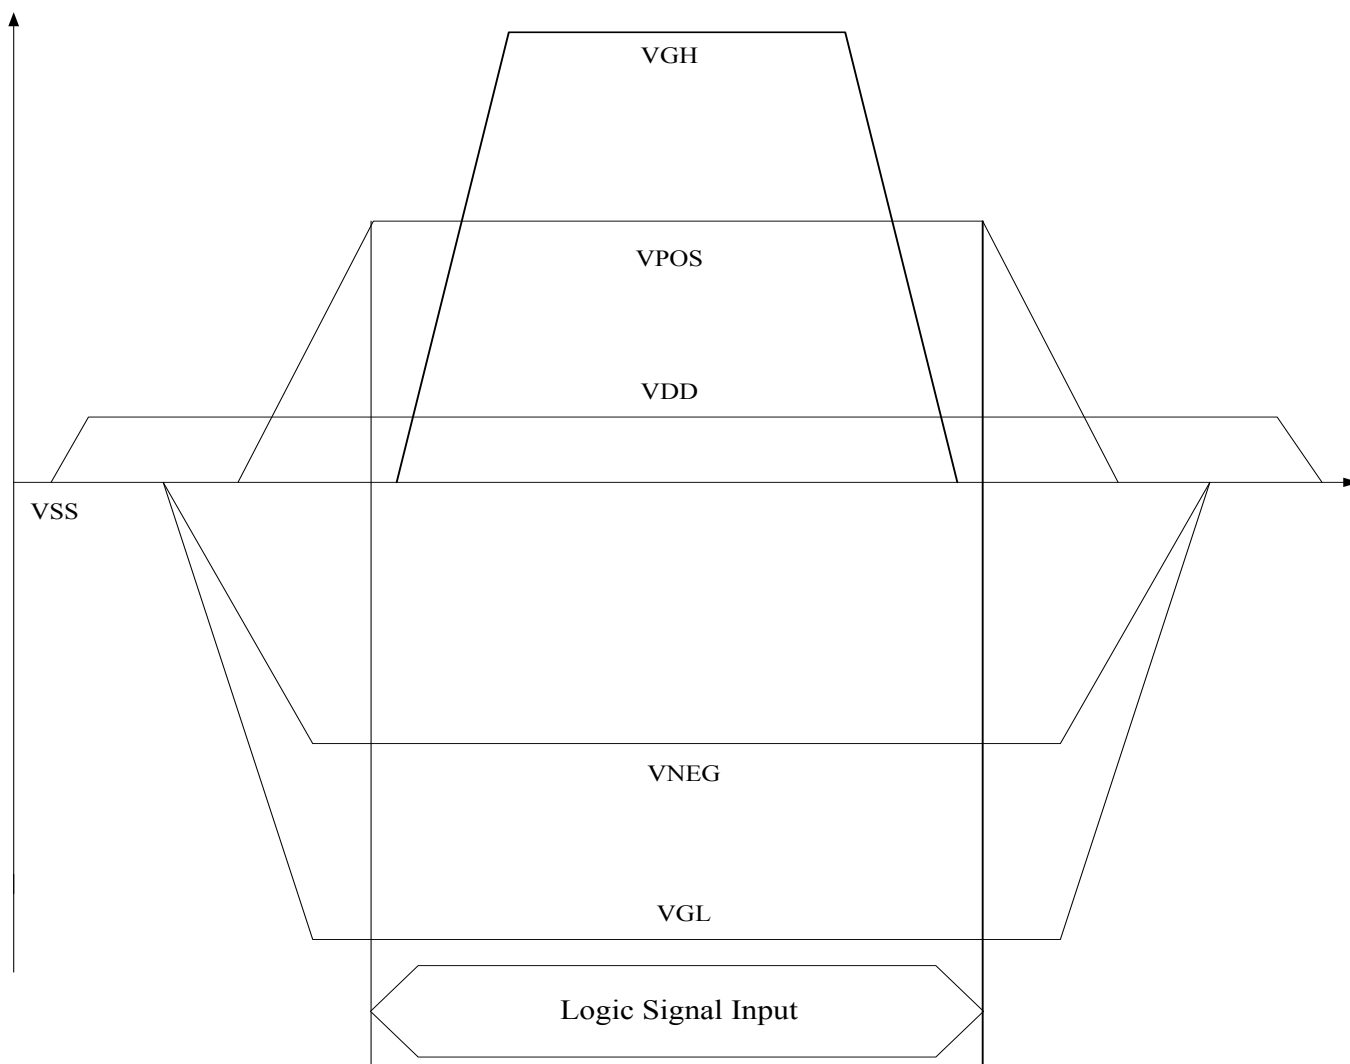



File Name	Specification For 4.3" SVGA EPD	Module Number	GDE043A2
Version	A/0	Page Number	10 of 17


7 Mechanical Specification

7.1 Dimension

PARAMETER	VALUE	UNIT	Remark
Display Resolution	800×600	dots	
Active area dimensions			
Width	88	mm	
Height	66	mm	
Screen size	4.3 (4: 3 diagonal)	Inch	
Resolution	230	dpi	
Pixel pitch			
Horizontal	0.11	mm	
Vertical	0.11	mm	
Pixel configuration	Rectangle		
Overall dimensions			
Width	126.5	mm	
Height	74.6	mm	
Thickness	1.17	mm	
Mass of the module	TBD	g	

7.2 Electrical Connector

SERVICE	CONNECTOR	TYPE NUMBER	NUMBER OF PINS	MATING CONNECTOR
Interface	PANASONIC	AXT526124	26	FPC pitch=0.4mm

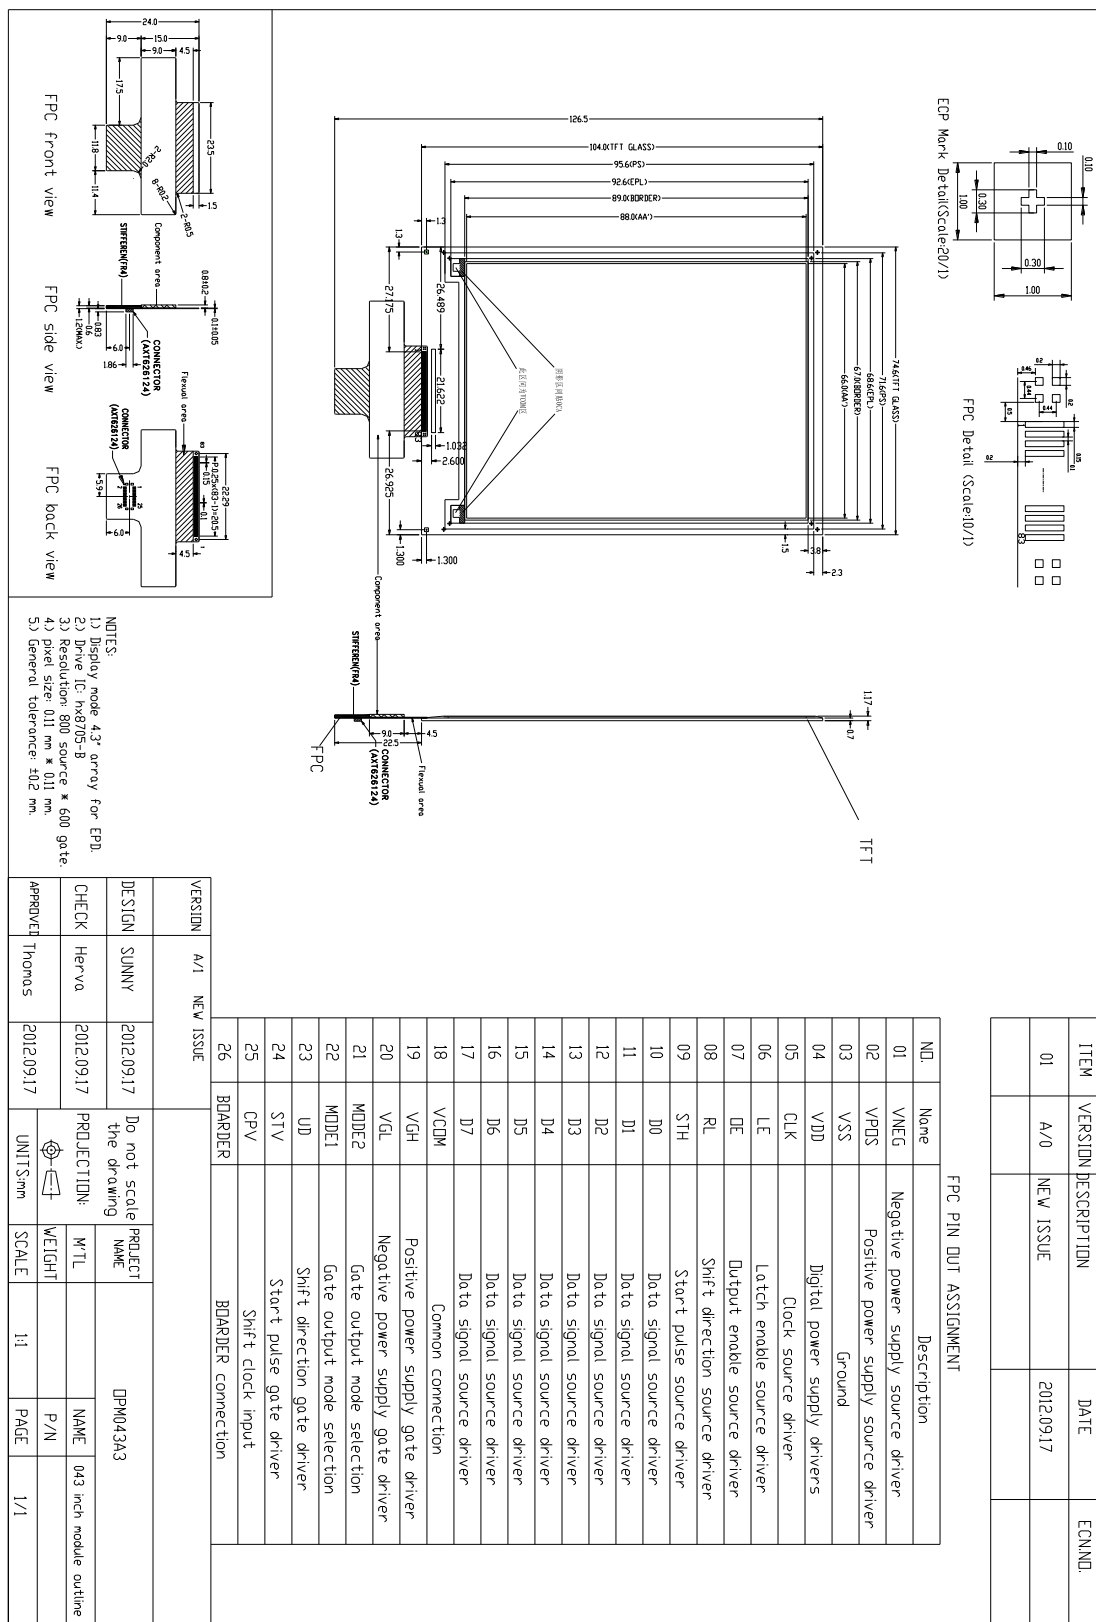



File Name	Specification For 4.3" SVGA EPD	Module Number	GDE043A2
Version	A/0	Page Number	12 of 17

8 Optical Specification

8.1 Optical characteristics

Parameter	Conditions	Values			Units	Notes
		Min.	Typ.	Max		
White Reflectivity	White	35			%	
Contrast Ratio (CR)		8:1				1
Image Update Time:	GC16(T=0°C)		1500	1600	ms	
	GC16(T=25°C)		960	1200		
	GC16(T≥35°C)		760	960		
	DU (T=0°C)		500	540		
	DU(T≥20°C)		300	360		
Image Sticking(Ghosting)		-2.0	1.0	2.0		2

(T_{amb}=25°C, f_v=50Hz, V_{epd}=+/-15V; supply voltage module is 3.3VDC. Measurements are made with Eye-One


Pro Spectrophotometer.)

Notes:

1. CR=Surface Reflectance with all white pixel/Surface Reflectance with all black pixels;

2. Ghosting Testing:

2.1. Testing Pattern

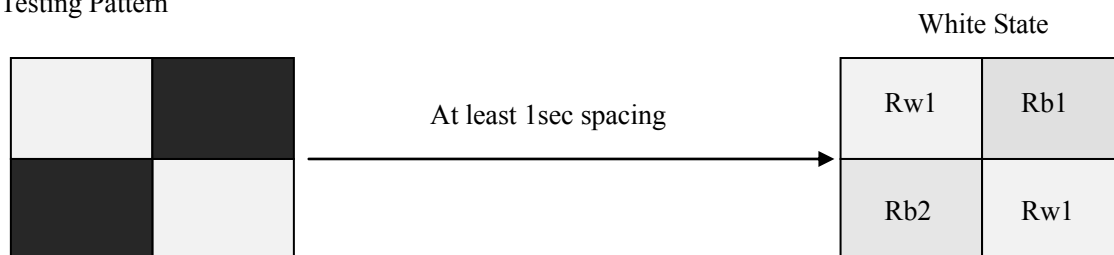

2.2.Refresh process: Init---GC White---4 checkerboard PatternGC) ---GC White.

2.3. Measuring the reflectance of all 4 checkerboard areas when final white state by Eye-one device.

2.4. Rw: reflectance of area transited from white state; Rb: reflectance of area transited from dark(black) state.

2.5. Calculating averages of WS-to-WS and DS-to-WS transitions:

$$Rw(ave)=(Rw1+Rw2)/2, Rb(ave)=(Rb1+Rb2)/2, G=Rw(ave)-Rb(ave).$$



File Name	Specification For 4.3" SVGA EPD	Module Number	GDE043A2
Version	A/0	Page Number	13 of 17

9 Handling, Safety, and Environment Requirements

Warning

The display glass may break when it is dropped or bumped on a hard surface. Handle with care. Should the display break, do not touch the electrophoretic material. In case of contact with electrophoretic material, wash with water and soap.

Caution

The display module should not be exposed to harmful gases, such as acid and alkali gases, which corrode electronic components.

Disassembling the display module can cause permanent damage and invalidates the warranty agreements.

Observe general precautions that are common to handling delicate electronic components. The glass can break and front surfaces can easily be damaged. Moreover the display is sensitive to static electricality and other rough environmental conditions.



File Name	Specification For 4.3" SVGA EPD	Module Number	GDE043A2
Version	A/0	Page Number	14 of 17


10. Reliability test

No.	TEST	CONDITION	METHOD	REMARK
1	High-Temperature Operation	T = +50°C, RH = 30% for 240 hrs	IEC 60 068-2-2Bp	At the end of the test, electrical, mechanical, and optical specifications shall be satisfied.
2	Low-Temperature Operation	T = 0°C for 240 hrs	IEC 60 068-2-2Ab	At the end of the test, electrical, mechanical, and optical specifications shall be satisfied.
3	High-Temperature Storage	T = +70°C, RH=23% for 240 hrs	IEC 60 068-2-2Bp	At the end of the test, electrical, mechanical, and optical specifications shall be satisfied.
4	Low-Temperature Storage	T = -25°C for 240 hrs	IEC 60 068-2-1Ab	At the end of the test, electrical, mechanical, and optical specifications shall be satisfied.
5	High-Temperature, High-Humidity Operation	T = +40°C, RH = 90% for 168 hrs	IEC 60 068-2-3CA	At the end of the test, electrical, mechanical, and optical specifications shall be satisfied.
6	High Temperature, High- Humidity Storage	T = +60°C, RH=80% for 168hrs	IEC 60 068-2-3CA	At the end of the test, electrical, mechanical, and optical specifications shall be satisfied.
7	Thermal Shock	1 cycle:[-25°C 30min]→[+70 °C 30 min] : 50 cycles	IEC 60 068-2-14	At the end of the test, electrical, mechanical, and optical specifications shall be satisfied.
8	Package Vibration	1.04G, Frequency: 10~500Hz Direction: X,Y,Z Duration: 1 hours in each direction	Full packed for shipment	At the end of the test, electrical, mechanical, and optical specifications shall be satisfied.
9	Package Drop Impact	Drop from height of 122 cm on concrete surface. Drop sequence: 1 corner, 3edges, 6 faces One drop for each	full packed for shipment	At the end of the test, electrical, mechanical, and optical specifications shall be satisfied.
10	Electrostatic Effect (non-operating)	Machine model +/- 250V, 0Ω , 200pF	IEC 62179, IEC 62180	At the end of the test, electrical, mechanical, and optical specifications shall be satisfied.
11	Altitude test Operation	700hPa (= 3000m) 48Hr		At the end of the test, electrical, mechanical, and optical specifications shall be satisfied.
12	Altitude test Storage	260hPa (= 10000m) 48Hr		At the end of the test, electrical, mechanical, and optical specifications shall be satisfied.
13	Stylus Tapping	POLYACETAL Pen:Top R0.8mm Load: 200gf;Speed:30times/min; Speed: 30times/min Total 13,500times,		At the end of the test, electrical, mechanical, and optical specifications shall be satisfied.



File Name	Specification For 4.3" SVGA EPD	Module Number	GDE043A2
Version	A/0	Page Number	15 of 17

11 Block Diagram

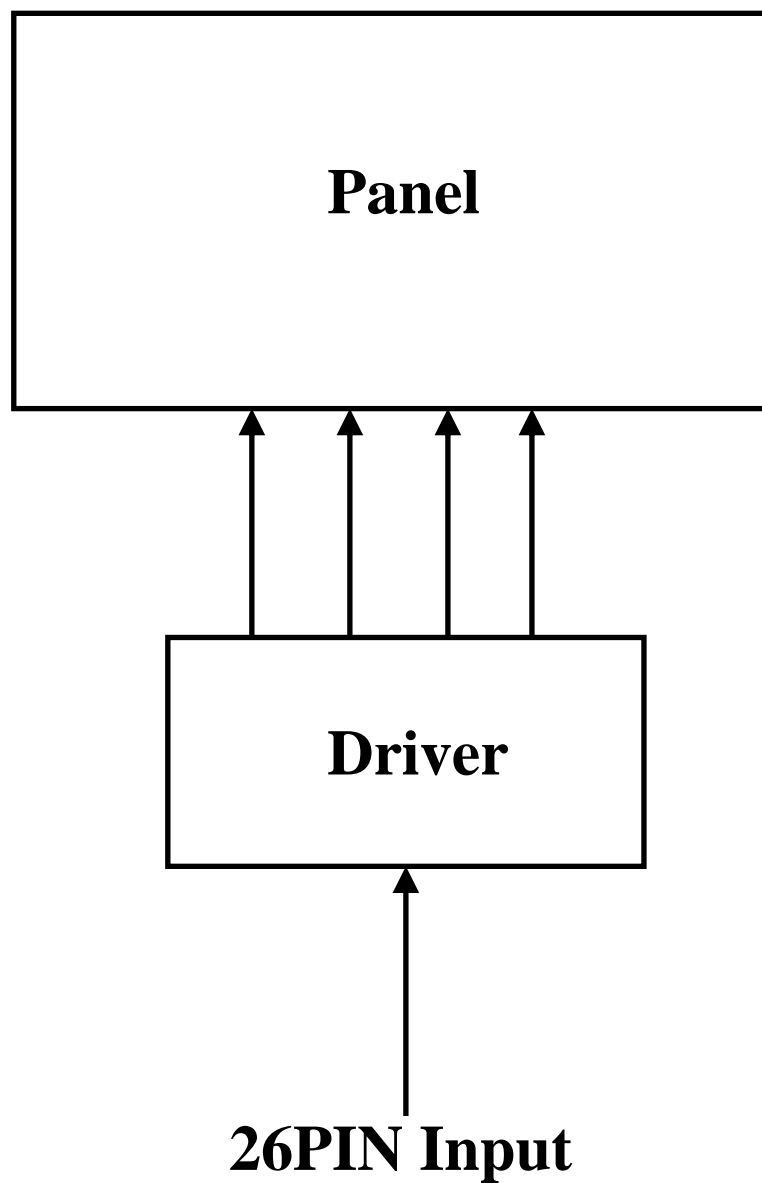

]




File Name	Specification For 4.3" SVGA EPD	Module Number	GDE043A2
Version	A/0	Page Number	16 of 17

12 Packaging

Packing Form

- a) Package quantity in one outer box: 96 pcs
- b) box size: 458 mm X 303 mm X 310 mm
- c) 1 outer box = 12 (full tray) + 1 (dummy / top tray)

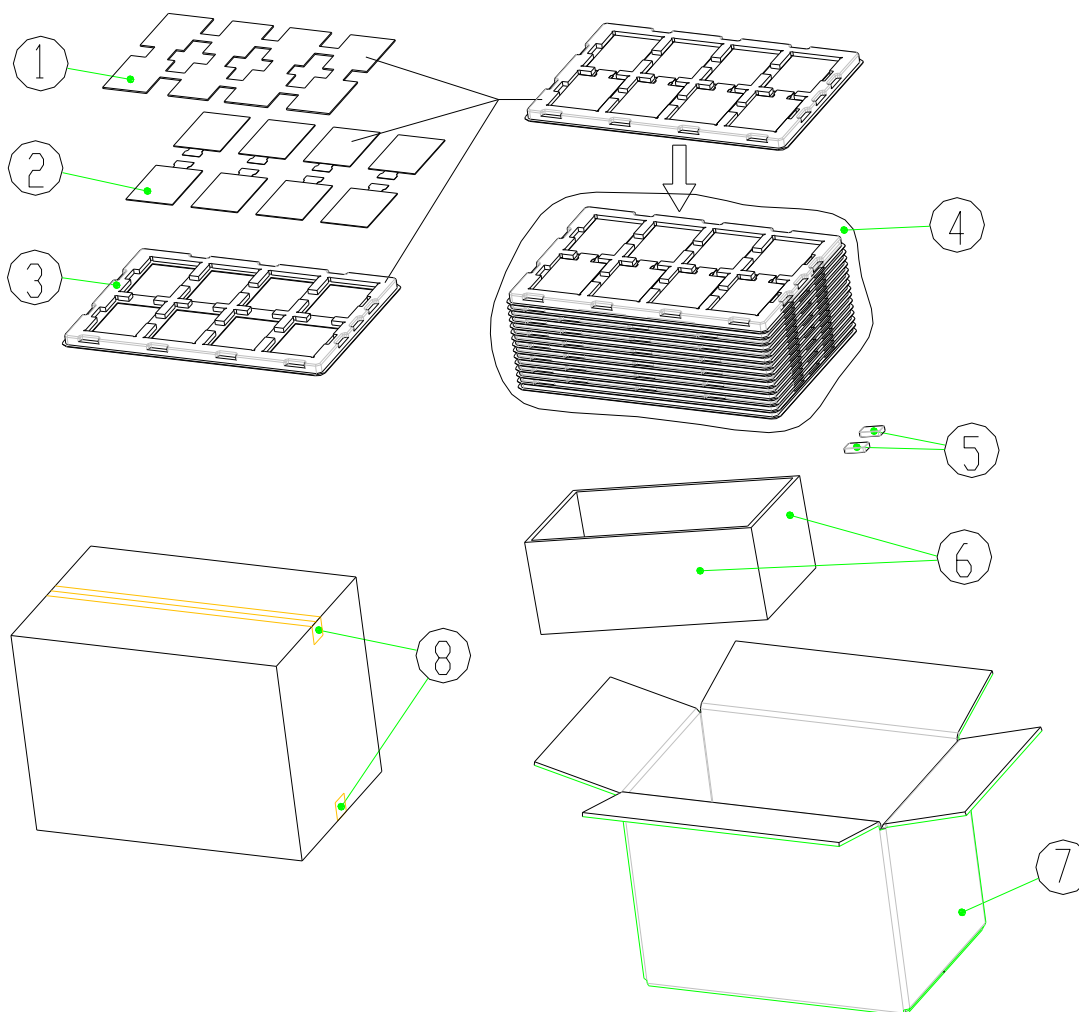

No.	Description	Material
①	PE Foam	EPE
②	Board Ass'y (96 pcs/1 Box)	EPD Panel
③	Packing, tray (13 pcs/1 outer box)	PS
④	Aluminium foil bag	Aluminium foil
⑤	Desiccant	Desiccant
⑥	side plate	EPE
⑦	Outer carton	K=A
⑧	Tape (43mm*300m)	OPP



File Name	Specification For 4.3" SVGA EPD	Module Number	GDE043A2
Version	A/0	Page Number	17 of 17

13 Mark and Bar Code definition

YYYYYYYY MMMMMMM



T01BS215ABYYY00001

- (1) YYYYYYYY: Module No.
- (2) MMMMMMM: Product date ; year month day.
- (3) Bar Code definition.

T 01 B S215AB YYY 00001

(1) (2) (3) (4) (5) (6)

- (1) Module Assemble Vendor.
- (2) Version.
- (3) Application.
- (4) O-Paper Film LOT.
- (5) Product LOT.
- (6) Product Serial Number.