
SUSTAINABLE RETROFIT V2 | KEEP THE ORIGINAL FORM

Arched openings and central projections restored; shading, PV and ventilation replace decorative fields.

ORIGINAL FACADE




FORM-PRESERVING RETROFIT

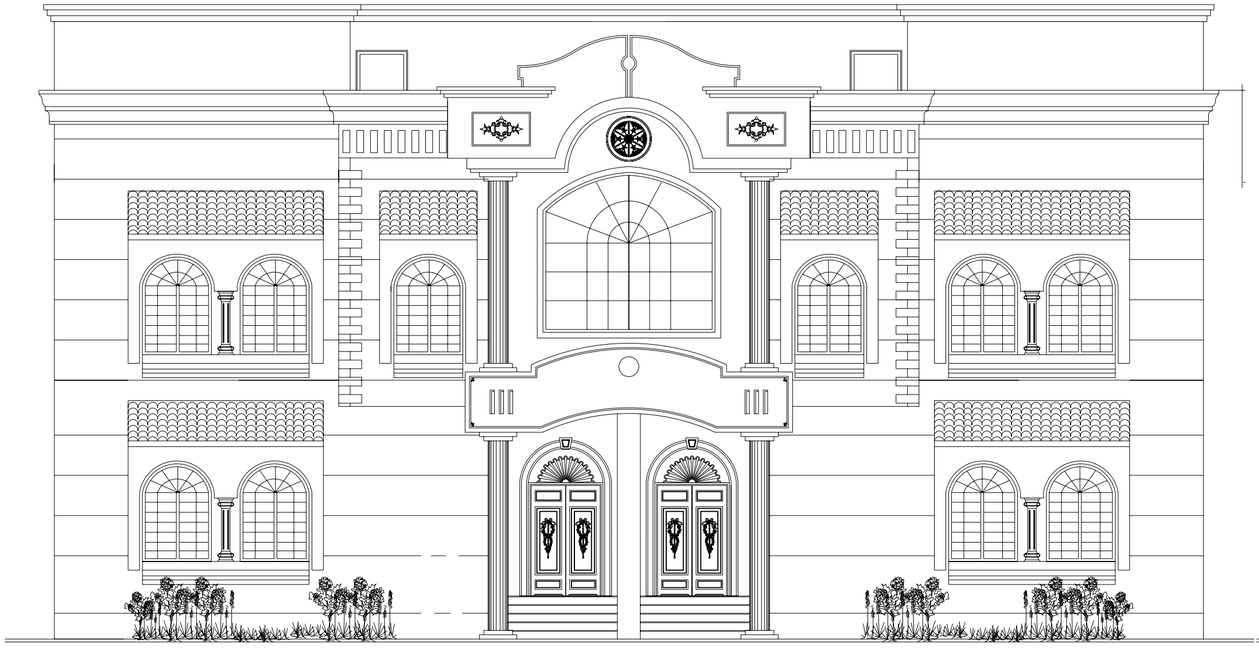



ORIGINAL SUPPLIED FACADE

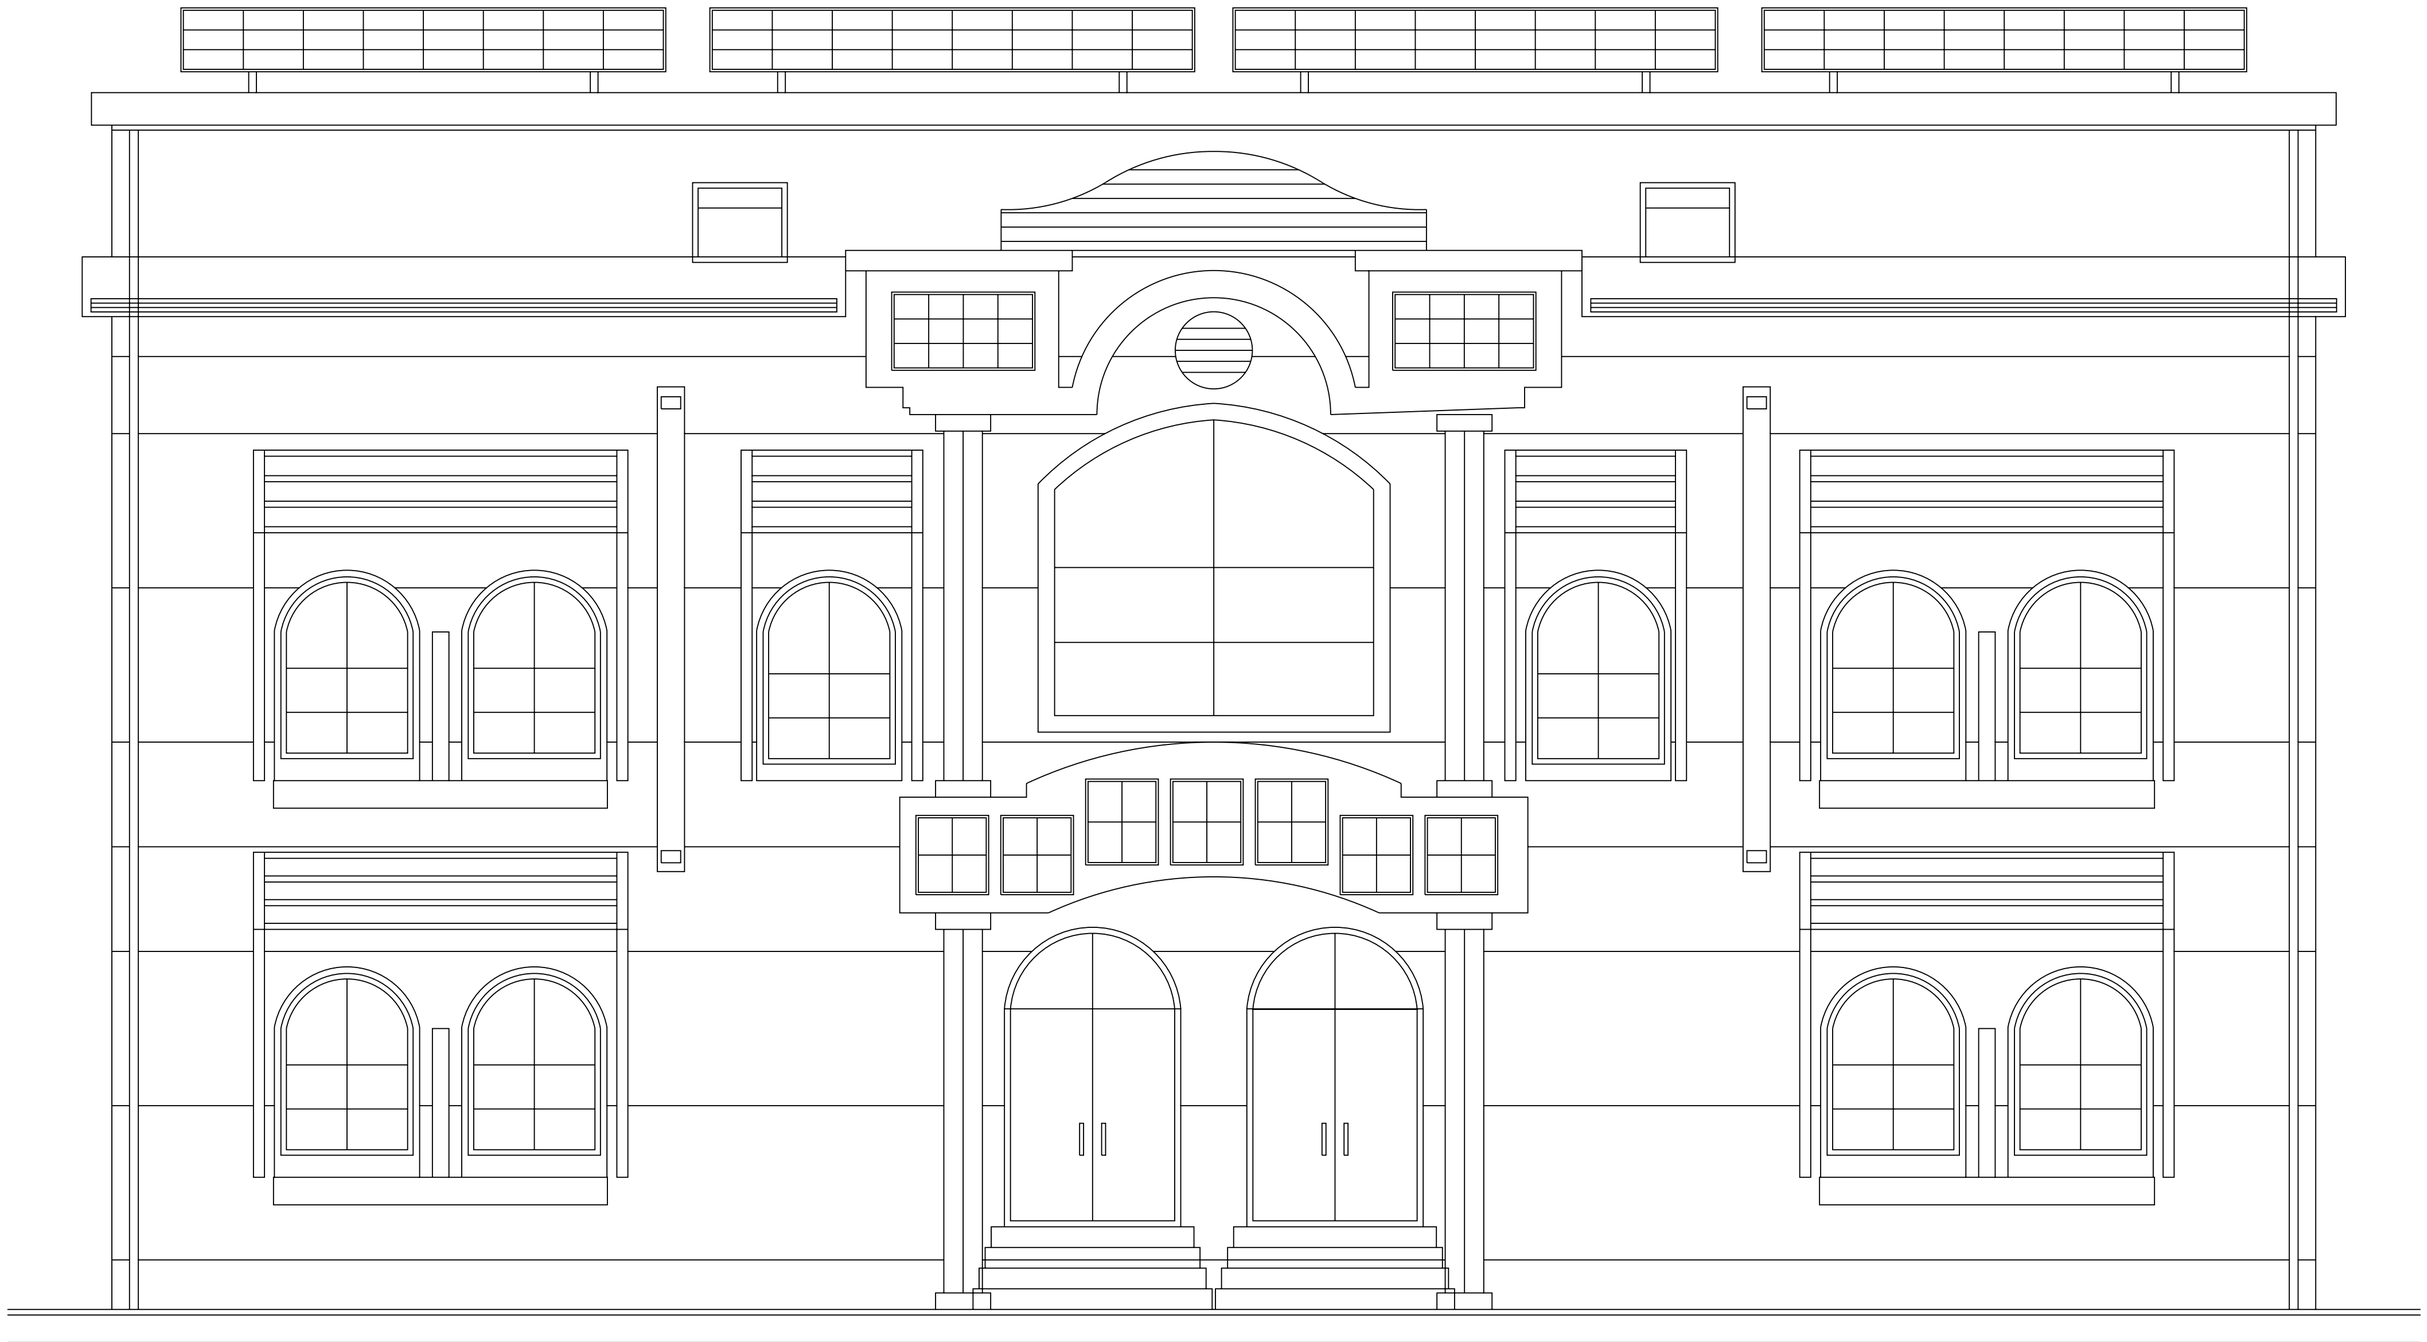

SUSTAINABLE RETROFIT V2 | RETAINED ARCHES AND PROJECTIONS / NO PLANTING

WHAT REPLACES EACH ORIGINAL ELEMENT?

1. Old shingle canopy fields

   Six louvred shading boxes in the same locations and depth envelopes.

2. Four small window columnlets

   Four plain vertical solar-control blades; shared sill masses kept.

3. Two upper ornamental motif cards

   Two BIPV infill fields; original shoulder positions retained.

4. Ornamental circular rosette

   A circular louvred exhaust/service vent at the same centre.

5. Curved entrance canopy

   Original curved outline retained; separate flat BIPV modules fitted inside.

6. Upper curved crest

   Original source curves retained as a louvred service screen.

7. Projecting wing cornices

   Shaded ventilated eaves in the same projecting bands.

8. Corner stone dressing strips

   Ventilated rainscreen strips in the same narrow zones.

9. Main and small arched openings

   Full arched glass restored; the previous rectangular head infills removed.

10. Existing roof/parapet

    Original roof height retained; four low PV banks added above it.

Architectural concept. Orientation, structure, ventilation paths and PV output require technical coordination.