


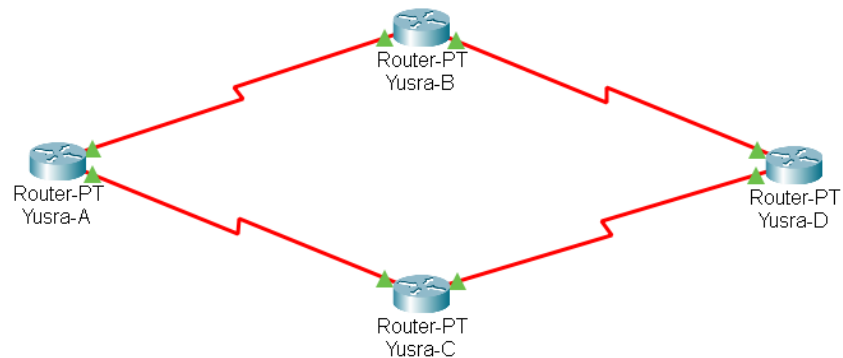

```

Router>en
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router bgp 40
Router(config-router)#network 40.0.0.0
^
% Invalid input detected at '^' marker.

Router(config-router)#network 40.0.0.0
Router(config-router)#neighbor 4.2.2.0 remote-as 21
Router(config-router)#neighbor 4.3.3.0 remote-as 37
Router(config-router)#ex
Router(config)#ex
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#show ip bgp summary
BGP router identifier 0.0.0.0, local AS number 40
BGP table version is 1, main routing table version 6
0 network entries using 0 bytes of memory
0 path entries using 0 bytes of memory
0/0 BGP path/bestpath attribute entries using 0 bytes of memory
0 BGP AS-PATH entries using 0 bytes of memory
0 BGP route-map cache entries using 0 bytes of memory
0 BGP filter-list cache entries using 0 bytes of memory
Bitfield cache entries: current 1 (at peak 1) using 32 bytes of memory
BGP using 32 total bytes of memory
BGP activity 0/0 prefixes, 0/0 paths, scan interval 60 secs

Neighbor      V    AS MsgRcvd MsgSent  TblVer  InQ  OutQ Up/Down  State/PfxRcd
4.2.2.0        4    21      0      0        1    0    0 00:23:29      4
4.3.3.0        4    37      0      0        1    0    0 00:23:29      4

Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

```