




NLV

Label Voided Film

DESCRIPTION:

NLV, is Coextruded BOPP Voided Film , suitable for over Wrap and wrap around label.

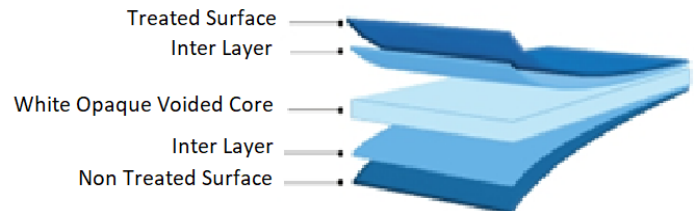

SPECIAL FEATURES:

- Very good opacity and whiteness.
- Excellent web flatness.
- Excellent Gloss @ treated surface.

TYPICAL :

High quality Rotogravure and Flexo printing .
High mechanical properties and stiffness .

Specification	Unit	Test direction	Typical values		Test method
Thickness	micron	-	38	47	Noda-PLAST Lab
Unit Weight	g/m ²	-	23,6	32	Noda-PLAST Lab
Yield	m ² /kg	-	42,4	31.25	Noda-PLAST Lab
Density	g/cm ³	-	0,68		
Wetting tension	mN/m	-	≥ 38		ASTM D 2578
Whiteness Index	-	-	90	92	-
Opacity	%	-	81	83	DIN 53146
Gloss	-	-	90	90	ASTM D 2457
COF Dynamic F-F (U-U)	-	-	≤ 0.30		DIN EN ISO 8295
Tensile Strength	MPa	MD	103		ASTM D 882
		TD	141		ASTM D 882
Elongation at Break	%	MD	140		ASTM D 882
		TD	32		ASTM D 882
Modulus of elasticity	MPa	MD	1150		ASTM D 882
		TD	2100		ASTM D 882

The numerical values reported in this data sheet are obtained from the average of the values recorded in our laboratory tests. Before final use, we recommend technical tests to ensure the film's suitability for the intended use. NODA PLAST Film is not responsible for inappropriate use of the product and its liability is limited to the exclusive replacement of the product, excluding any compensation or damages of any kind.