


Technical Data Sheet

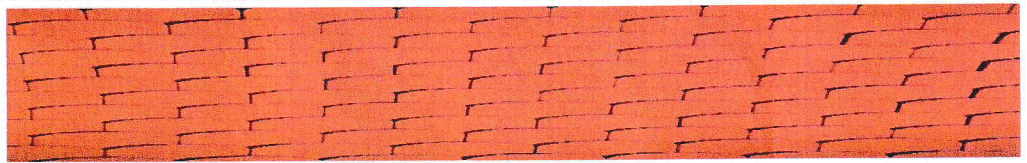


NSH

High COF, Clear Heat Sealable Film

DESCRIPTION:

NSH is coextruded BOPP film, heat sealable & high COF suitable for food packaging and intended specially for pouches stacking.

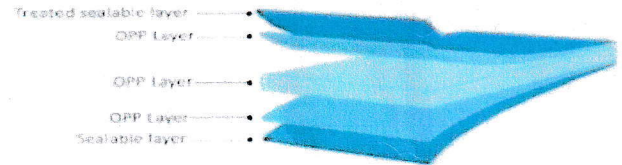

SPECIAL FEATURES:

- Excellent transparency and gloss
- Wide seal range and good seal strength
- Excellent hot tack
- Excellent web flatness
- High mechanical & optical properties and stiffness.

TYPICAL:

General purpose packaging Lamination
High quality rotogravure and flexo printing.

Specification	Unit	Test direction	Typical values				Test method
Thickness	micron	-	20	25	30	40	Noda-PLAST Lab
Unit Weight	g/m ²	-	18.2	22.7	27.3	36.5	Noda-PLAST Lab
Yield	m ² /kg	-	55	44	36.6	27.4	Noda-PLAST Lab
Wetting tension	dynes/cm	-	≥ 38	≥ 38	≥ 38	≥ 38	ASTM D 2578
Haze	%	-	≤ 3.5	≤ 3.5	≤ 3.5	≤ 3.5	ASTM D 1003
Gloss 45°	%	-	86	85	82	82	ASTM D 2457
COF Dynamic F-F (U-U)	-	-	≤ 0.50	≤ 0.50	≤ 0.50	≤ 0.50	DIN EN ISO 8295
Tensile Strength	MPa	MD	150	140	140	140	ASTM D 882
		TD	290	290	290	290	ASTM D 882
Elongation at Break	%	MD	200	200	200	200	ASTM D 882
		TD	50	50	50	50	ASTM D 882
Thermal Shrinkage	%	MD	≤ 5.0				BMS TT 0.2
		TD	≤ 3.0				BMS TT 0.2
Heat Seal Range (U-U)	°C	-	105-140	105-140	105-140	105-140	Noda-PLAST Lab

The numerical values reported in this data sheet are obtained from the average of the values recorded in our laboratory tests. Before final use, we recommend technical tests to ensure the film's suitability for the intended use. NODA PLAST FILM is not responsible for inappropriate use of the product and its liability is limited to the exclusive replacement of the product, excluding any compensation or damages of any kind.