

# NSW


## Solid White Sealable BOPP Film

### PRODUCT OVERVIEW

NSW is a solid white OPP film specially designed and formulated for food packaging applications. It combines excellent whiteness and gloss with good antistatic properties and reliable heat-sealing performance.

### KEY FEATURES

- Excellent whiteness and high gloss
- Good antistatic properties
- Very good heat-sealing performance
- Suitable for demanding food packaging applications

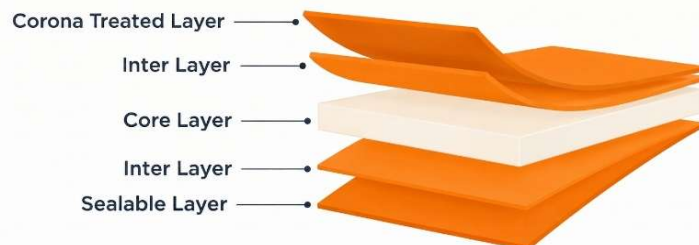

### APPLICATIONS

- Biscuit and cookie packaging
- Light- and UV-sensitive food packaging

### TECHNICAL DATA — TYPICAL VALUES

| Property                                |    | Unit               | Typical values |       |      |      |      | Test Method     |
|-----------------------------------------|----|--------------------|----------------|-------|------|------|------|-----------------|
| Thickness                               |    | µm                 | 18             | 20    | 25   | 30   | 40   | NODA PLAST Lab  |
| Unit Weight                             |    | g/m <sup>2</sup>   | 17.1           | 19.0  | 23.8 | 28.5 | 38.0 | NODA PLAST Lab  |
| Yield                                   |    | m <sup>2</sup> /kg | 58.5           | 52.6  | 42.0 | 35.1 | 26.3 | NODA PLAST Lab  |
| Wetting Tension                         |    | dynes/cm           | ≥ 38           |       |      |      |      | ASTM D2578      |
| Transmittance                           |    | %                  | 44             | 43    | 40   | 38   | 34   | ASTM D 1003     |
| Gloss @ 45°                             |    | %                  | 55             | 55    | 50   | 50   | 50   | ASTM D2457      |
| COF Dynamic F-F (U-U)                   |    | —                  | ≤ 0.30         |       |      |      |      | DIN EN ISO 8295 |
| Tensile Strength                        | MD | N/mm               | 107            |       |      |      |      | ASTM D882       |
|                                         | TD |                    | 205            |       |      |      |      | ASTM D882       |
| Elongation at Break                     | MD | %                  | 220            |       |      |      |      | ASTM D882       |
|                                         | TD |                    | 60             |       |      |      |      | ASTM D882       |
| Shrinkage at 120°C/5min                 | MD | %                  | ≤ 5.0          |       |      |      |      | NODA PLAST Lab  |
|                                         | TD |                    | ≤ 3.0          |       |      |      |      | NODA PLAST Lab  |
| Seal Strength<br>@ 130 °C 1 bar / 1 Sec |    | —                  | N/15mm         | > 2.0 |      |      |      | NODA PLAST Lab  |

### TECHNICAL NOTES

The numerical values reported in this data sheet are obtained from the average of the values recorded in our laboratory tests. Before final use, we recommend technical tests to ensure the film's suitability for the intended use. NODA PLAST Film is not responsible for inappropriate use of the product, and its liability is limited to the exclusive replacement of the product, excluding any compensation or damages of any kind.