


MATT-S

Matt Film (Both Sides Sealable)

PRODUCT OVERVIEW

Matt-S is coextruded matt BOPP film with one side regular matt sealable layer and other side treated glossy heat sealable layer for good printability.

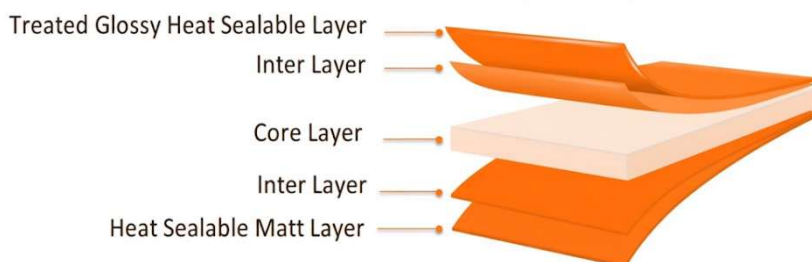

KEY FEATURES

- xcellent matte dispersion
- Wide sealing range
- Good seal strength
- High mechanical properties
- High stiffness
- Excellent web flatness

APPLICATIONS

- General-purpose packaging
- Lamination applications
- High-quality printed packaging
- Rotogravure printing
- Flexographic printing

TECHNICAL DATA — TYPICAL VALUES

Property		Unit	Typical values			Test Method
Thickness		μm	20	25	30	NODA PLAST Lab
Unit Weight		g/m ²	17.6	22.2	26.7	NODA PLAST Lab
Yield		m ² /kg	56.8	45.5	37.5	NODA PLAST Lab
Wetting Tension		mN/m	≥ 38			ASTM D2578
Gloss 45°		%	10			ASTM D2457
Haze		%	72			ASTM D1003
COF Dynamic F-F (U-U)		—	≤ 0.30			DIN EN ISO 8295
Tensile Strength	MD	MPa	130			ASTM D882
	TD		260			ASTM D882
Elongation at Break	MD	%	150			ASTM D882
	TD		50			ASTM D882
Tensile Modulus of Elasticity	MD	MPa	2000			ASTM D882
	TD		3800			ASTM D882
Thermal Shrinkage	MD	%	≤ 5			BMS TT 0.2
	TD		≤ 3			BMS TT 0.2
Seal strength 120°C / 1bar / 1s / flat seals (Untreated-Untreated)		N/15mm	> 2			BMS TT 0.1
Heat Seal Range (U-U)		°C	125-140			Noda-PLAST Lab

TECHNICAL NOTES

The numerical values reported in this data sheet are obtained from the average of the values recorded in our laboratory tests. Before final use, we recommend technical tests to ensure the film's suitability for the intended use. NODA PLAST Film is not responsible for inappropriate use of the product, and its liability is limited to the exclusive replacement of the product, excluding any compensation or damages of any kind.