

NSC


Transparent Film

PRODUCT OVERVIEW

NSC is a coextruded, heat-sealable BOPP film designed for food and general-purpose packaging. It offers excellent transparency, gloss, sealing performance, and printability, making it suitable for rotogravure, flexographic printing, and lamination.

KEY FEATURES

- Excellent transparency & gloss
- Wide sealing range
- Good seal strength
- Excellent hot tack
- High mechanical properties & stiffness
- Excellent web flatness

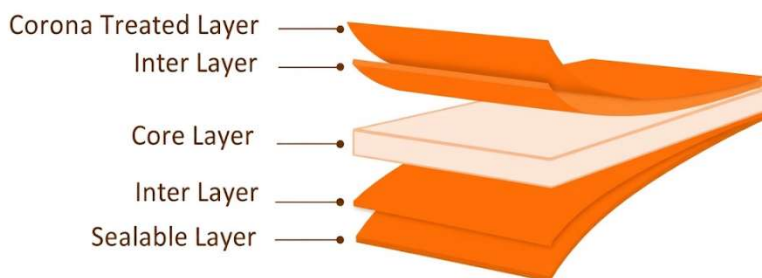

APPLICATIONS

- Food & general packaging
- Lamination
- Rotogravure printing
- Flexographic printing

TECHNICAL DATA — TYPICAL VALUES

Property		Unit	Typical values				Test Method
Thickness		µm	20	25	30	40	NODA PLAST Lab
Unit Weight		g/m ²	18.2	22.7	27.3	36.5	NODA PLAST Lab
Yield		m ² /kg	55	44	36.6	27.4	NODA PLAST Lab
Wetting Tension		Dynes/cm	≥ 38				ASTM D2578
Haze		%	≤ 3.5	≤ 3.5	≤ 3.5	≤ 3.5	ASTM D1003
Gloss 45°		%	82	82	82	82	ASTM D2457
COF Dynamic F-F (U-U)		—	≤ 0.30				DIN EN ISO 8295
Tensile Strength	MD	MPa	150	140	140	140	ASTM D882
	TD		290	290	290	290	ASTM D882
Elongation at Break	MD	%	200				ASTM D882
	TD		50				ASTM D882
Thermal Shrinkage @ 120 °C , 5 min	MD	%	≤ 5				NODA PLAST Lab
	TD		≤ 3				NODA PLAST Lab
Heat Seal Range (U-U)		°C	105-140				NODA PLAST Lab

TECHNICAL NOTES

The numerical values reported in this data sheet are obtained from the average of the values recorded in our laboratory tests. Before final use, we recommend technical tests to ensure the film's suitability for the intended use. NODA PLAST Film is not responsible for inappropriate use of the product, and its liability is limited to the exclusive replacement of the product, excluding any compensation or damages of any kind.