


NSMM-B

Metallized BOPP Film, Both Sides C. T

PRODUCT OVERVIEW

NSMM- B, is Co-extruded BOPP film, one side metallized and Both sides Corona Treated, Film is dedicated for Triple Lamination and has moderate barrier suitable for food packaging as well goods with general use.

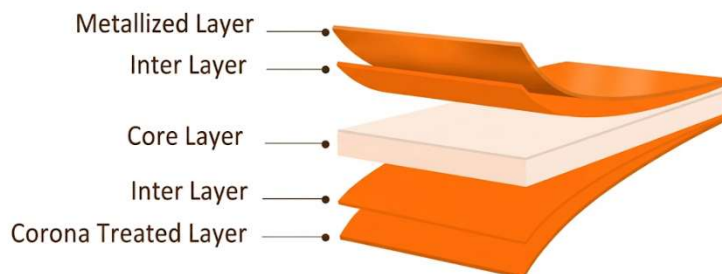

KEY FEATURES

- Excellent metal adhesion & homogeneous deposition
- Excellent web flatness

APPLICATIONS

- General-purpose packaging
- Triple lamination

TECHNICAL DATA — TYPICAL VALUES

Property		Unit	Typical values		Test Method
Thickness		μm	18	20	DIN ISO 4593
Unit Weight		g/m ²	16.4	18.2	NODA PLAST Method
Yield		m ² /kg	60.97	54.9	NODA PLAST Method
Wetting Tension		mN/m	≥ 38		ASTM D2578
Optical Density		—	> 2		Modus T&D (T= Transmitted light)
OTR (23°C-0% RH)		cc/(m ² *day*atm)	< 80		ASTM D3985
WVTR (38°C-90% RH)		g/(m ² *day*atm)	< 0.8		ASTM F 1249
COF Dynamic F-F (U-U)		—	≤ 0.30	≤ 0.31	DIN EN ISO 8295
Tensile Strength	MD	MPa	150		ASTM D882
	TD		290		ASTM D882
Elongation at Break	MD	%	180		ASTM D882
	TD		60		ASTM D882
Thermal Shrinkage	MD	%	≤ 5		Noda-Plast Method
	TD		≤ 3		Noda-Plast Method

TECHNICAL NOTES

The numerical values reported in this data sheet are obtained from the average of the values recorded in our laboratory tests. Before final use, we recommend technical tests to ensure the film's suitability for the intended use. NODA PLAST Film is not responsible for inappropriate use of the product, and its liability is limited to the exclusive replacement of the product, excluding any compensation or damages of any kind.