

NSMM-O


Metallized BOPP Film, One Side C. T

PRODUCT OVERVIEW

NSMM- O is coextruded BOPP film, one side heat sealable, other side metallized, moderate barrier suitable for food packaging and goods with general use.

KEY FEATURES

- Excellent metal band & homogeneous metal deposition
- Wide sealing range & good seal strength
- Excellent hot tack
- Excellent web flatness
- High mechanical properties & stiffness

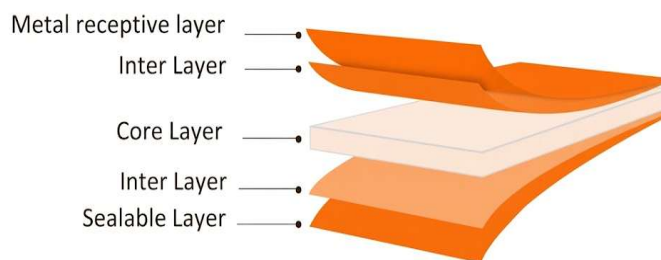

APPLICATIONS

- General-purpose packaging
- Lamination
- High-quality rotogravure & flexographic printing

TECHNICAL DATA — TYPICAL VALUES

Property		Unit	Typical values				Test Method
Thickness		μm	18	20	25	30	DIN ISO 4593
Unit Weight		g/m ²	16.4	18.2	22.75	27.3	NODA PLAST Lab
Yield		m ² /kg	60.97	54.9	43.9	36.6	NODA PLAST Lab
Wetting Tension		mN/m	≥ 38				ASTM D2578
Optical Density		—	> 2				Modus T&D (T= Transmitted light)
OTR (23°C-0% RH)		cc/(m ² *day*atm)	< 80				ASTM D 3985
WVTR (38°C-90% RH)		g/(m ² *day*atm)	< 0.8				ASTM F 1249
COF Dynamic F-F (U-U)		—	≤ 0.30	≤ 0.31	≤ 0.32	≤ 0.30	DIN EN ISO 8295
Tensile Strength	MD	MPa	150				ASTM D882
	TD		290				ASTM D882
Elongation at Break	MD	%	180				ASTM D882
	TD		60				ASTM D882
Thermal Shrinkage	MD	%	≤ 5				BMS TT 0.2
	TD		≤ 3				BMS TT 0.2

TECHNICAL NOTES

The numerical values reported in this data sheet are obtained from the average of the values recorded in our laboratory tests. Before final use, we recommend technical tests to ensure the film's suitability for the intended use. NODA PLAST Film is not responsible for inappropriate use of the product, and its liability is limited to the exclusive replacement of the product, excluding any compensation or damages of any kind.