


NLV

LABEL VOIDED FILM

PRODUCT OVERVIEW

NLV is a coextruded BOPP film with a micro-voided core structure, developed as a lightweight substrate for label and packaging applications. The film combines a multilayer construction with a controlled surface structure to provide consistent performance during converting.

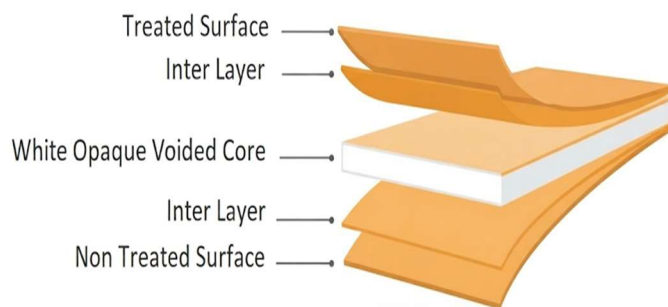

KEY FEATURES

- High opacity and whiteness
- Excellent web flatness
- High gloss on treated surface
- Rotogravure & flexographic printing
- High mechanical properties
- High stiffness

APPLICATIONS

- Wrap-Around Labels
- Over-Wrap
- Bottle & Container Labels
- Food & Beverage Labels
- Household Product Labels
- Personal Care Labels

TECHNICAL DATA — TYPICAL VALUES

Property		Unit	Typical values		Test Method
Thickness		µm	38	47	NODA PLAST Lab
Unit Weight		g/m ²	23.6	32	NODA PLAST Lab
Yield		m ² /kg	42.4	31.25	NODA PLAST Lab
Density		g/cm ³	0.68		—
Wetting Tension		mN/m	≥ 38		ASTM D2578
Whiteness Index		—	90	92	—
Opacity		%	81	83	DIN 53146
Gloss		—	90	90	ASTM D2457
COF Dynamic F-F (U-U)		—	≤ 0.30		DIN EN ISO 8295
Tensile Strength	MD	MPa	103		ASTM D882
	TD	MPa	141		ASTM D882
Elongation at Break	MD	%	140		ASTM D882
	TD	%	32		ASTM D882
Modulus of Elasticity	MD	MPa	1080		ASTM D882
	TD	MPa	2000		ASTM D882

TECHNICAL NOTES

The numerical values reported in this data sheet are obtained from the average of the values recorded in our laboratory tests. Before final use, we recommend technical tests to ensure the film's suitability for the intended use. NODA PLAST Film is not responsible for inappropriate use of the product, and its liability is limited to the exclusive replacement of the product, excluding any compensation or damages of any kind.