


NSM-BM Metallized BOPP Film

PRODUCT OVERVIEW

NSM-BM, is Co-extruded BOPP film, one side metallized and Both side Treated, Film is dedicated for Triple Lamination and has moderate barrier suitable for food packaging as well goods with general use.

KEY FEATURES

- Excellent metal adhesion & homogeneous deposition
- Excellent web flatness

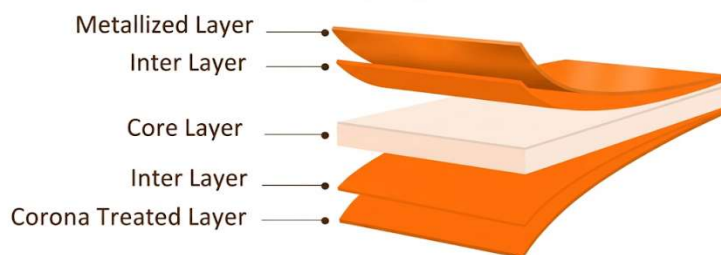

APPLICATIONS

- General-purpose packaging
- Triple lamination

TECHNICAL DATA — TYPICAL VALUES

Property		Unit	Typical values		Test Method
Thickness		μm	18	20	DIN ISO 4593
Unit Weight		g/m ²	16.4	18.2	NODA PLAST Method
Yield		m ² /kg	60.97	54.9	NODA PLAST Method
Wetting Tension		mN/m	≥ 38		ASTM D2578
Optical Density		—	> 2		Modus T&D (T= Transmitted light)
OTR (23°C-0% RH)		cc/(m ² *day*atm)	< 80		ASTM D3985
WVTR (38°C-90% RH)		g/(m ² *day*atm)	< 0.8		ASTM F 1249
COF Dynamic F-F (U-U)		—	≤ 0.30	≤ 0.31	DIN EN ISO 8295
Tensile Strength	MD	MPa	150		ASTM D882
	TD		290		ASTM D882
Elongation at Break	MD	%	180		ASTM D882
	TD		60		ASTM D882
Thermal Shrinkage	MD	%	≤ 5		Noda-Plast Method
	TD		≤ 3		Noda-Plast Method

TECHNICAL NOTES

The values in this Technical Data Sheet are **typical or average values for reference only** and are not guaranteed specifications. Actual values may vary due to normal manufacturing tolerances.

Customers are responsible for verifying the film's suitability for their specific application and processing conditions. NODA PLAST makes no guarantee regarding the stated typical values or their suitability for a particular use.

STORAGE, HANDLING AND APPLICATION

Store NODA NSM-M / NSM-MB metallized film in a **clean, dry, well-ventilated area below 30°C**, protected from sunlight, heat, moisture, and temperature fluctuations.

Use **FIFO (First-In, First-Out)** stock management. Before processing, condition the film for at least **24 hours** in the operating environment.

Recommended use: within **3 months of production**, when stored under the recommended conditions.