


NSM-M Metallized BOPP Film,

PRODUCT OVERVIEW

NSMM- O is coextruded BOPP film, one side heat sealable, other side metallized, moderate barrier suitable for food packaging and goods with general use.

KEY FEATURES

- Excellent metal band & homogeneous metal deposition
- Wide sealing range & good seal strength
- Excellent hot tack
- Excellent web flatness
- High mechanical properties & stiffness

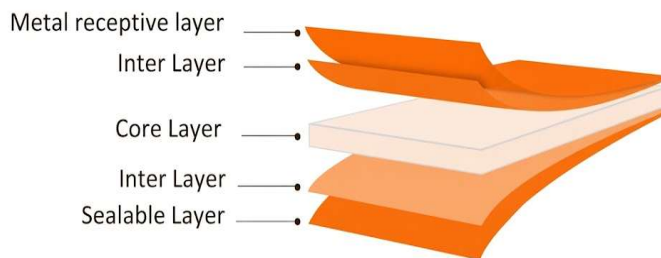

APPLICATIONS

- General-purpose packaging
- Lamination
- High-quality rotogravure & flexographic printing

TECHNICAL DATA — TYPICAL VALUES

Property		Unit	Typical values				Test Method
Thickness		μm	18	20	25	30	DIN ISO 4593
Unit Weight		g/m ²	16.4	18.2	22.75	27.3	NODA PLAST Lab
Yield		m ² /kg	60.97	54.9	43.9	36.6	NODA PLAST Lab
Wetting Tension		mN/m	≥ 38				ASTM D2578
Optical Density		—	> 2				Modus T&D (T= Transmitted light)
OTR (23°C-0% RH)		cc/(m ² *day*atm)	< 80				ASTM D 3985
WVTR (38°C-90% RH)		g/(m ² *day*atm)	< 0.8				ASTM F 1249
COF Dynamic F-F (U-U)		—	≤ 0.30	≤ 0.31	≤ 0.32	≤ 0.30	DIN EN ISO 8295
Tensile Strength	MD	MPa	150				ASTM D882
	TD		290				ASTM D882
Elongation at Break	MD	%	180				ASTM D882
	TD		60				ASTM D882
Thermal Shrinkage	MD	%	≤ 5				BMS TT 0.2
	TD		≤ 3				BMS TT 0.2

TECHNICAL NOTES

The values in this Technical Data Sheet are **typical or average values for reference only** and are not guaranteed specifications. Actual values may vary due to normal manufacturing tolerances.

Customers are responsible for verifying the film's suitability for their specific application and processing conditions. NODA PLAST makes no guarantee regarding the stated typical values or their suitability for a particular use.

STORAGE, HANDLING AND APPLICATION

Store NODA NSM-M / NSM-MB metallized film in a **clean, dry, well-ventilated area below 30°C**, protected from sunlight, heat, moisture, and temperature fluctuations.

Use **FIFO (First-In, First-Out)** stock management. Before processing, condition the film for at least **24 hours** in the operating environment.

Recommended use: within **3 months of production**, when stored under the recommended conditions.