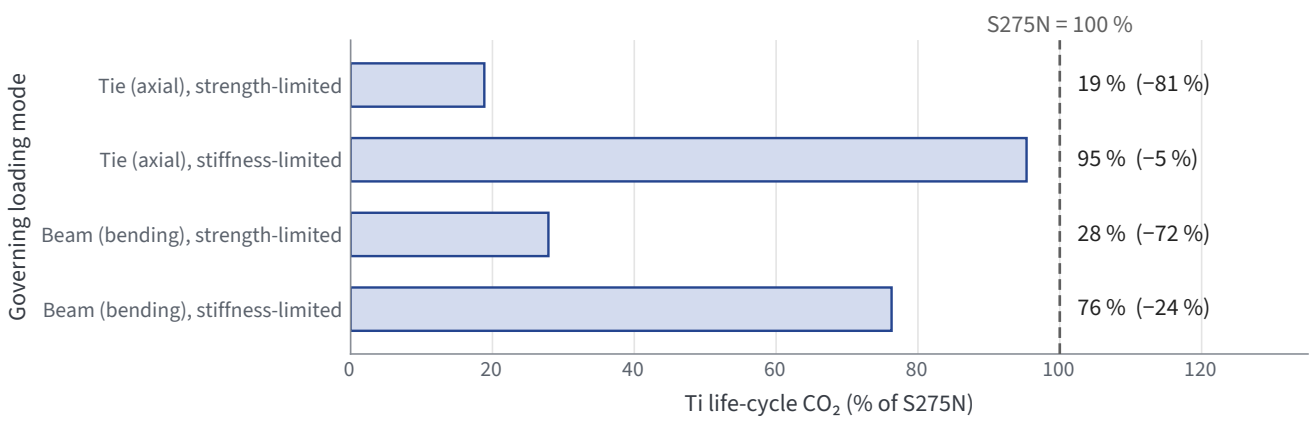
S275N = 100 %
Governing loading mode
Tie (axial), strength-limited
Tie (axial), stiffness-limited
Beam (bending), strength-limited
Beam (bending), stiffness-limited
19 % (−81 %)
95 % (−5 %)
28 % (−72 %)
76 % (−24 %)
0
20
40
60
80
100
120
Ti life-cycle CO_2 (% of S275N)