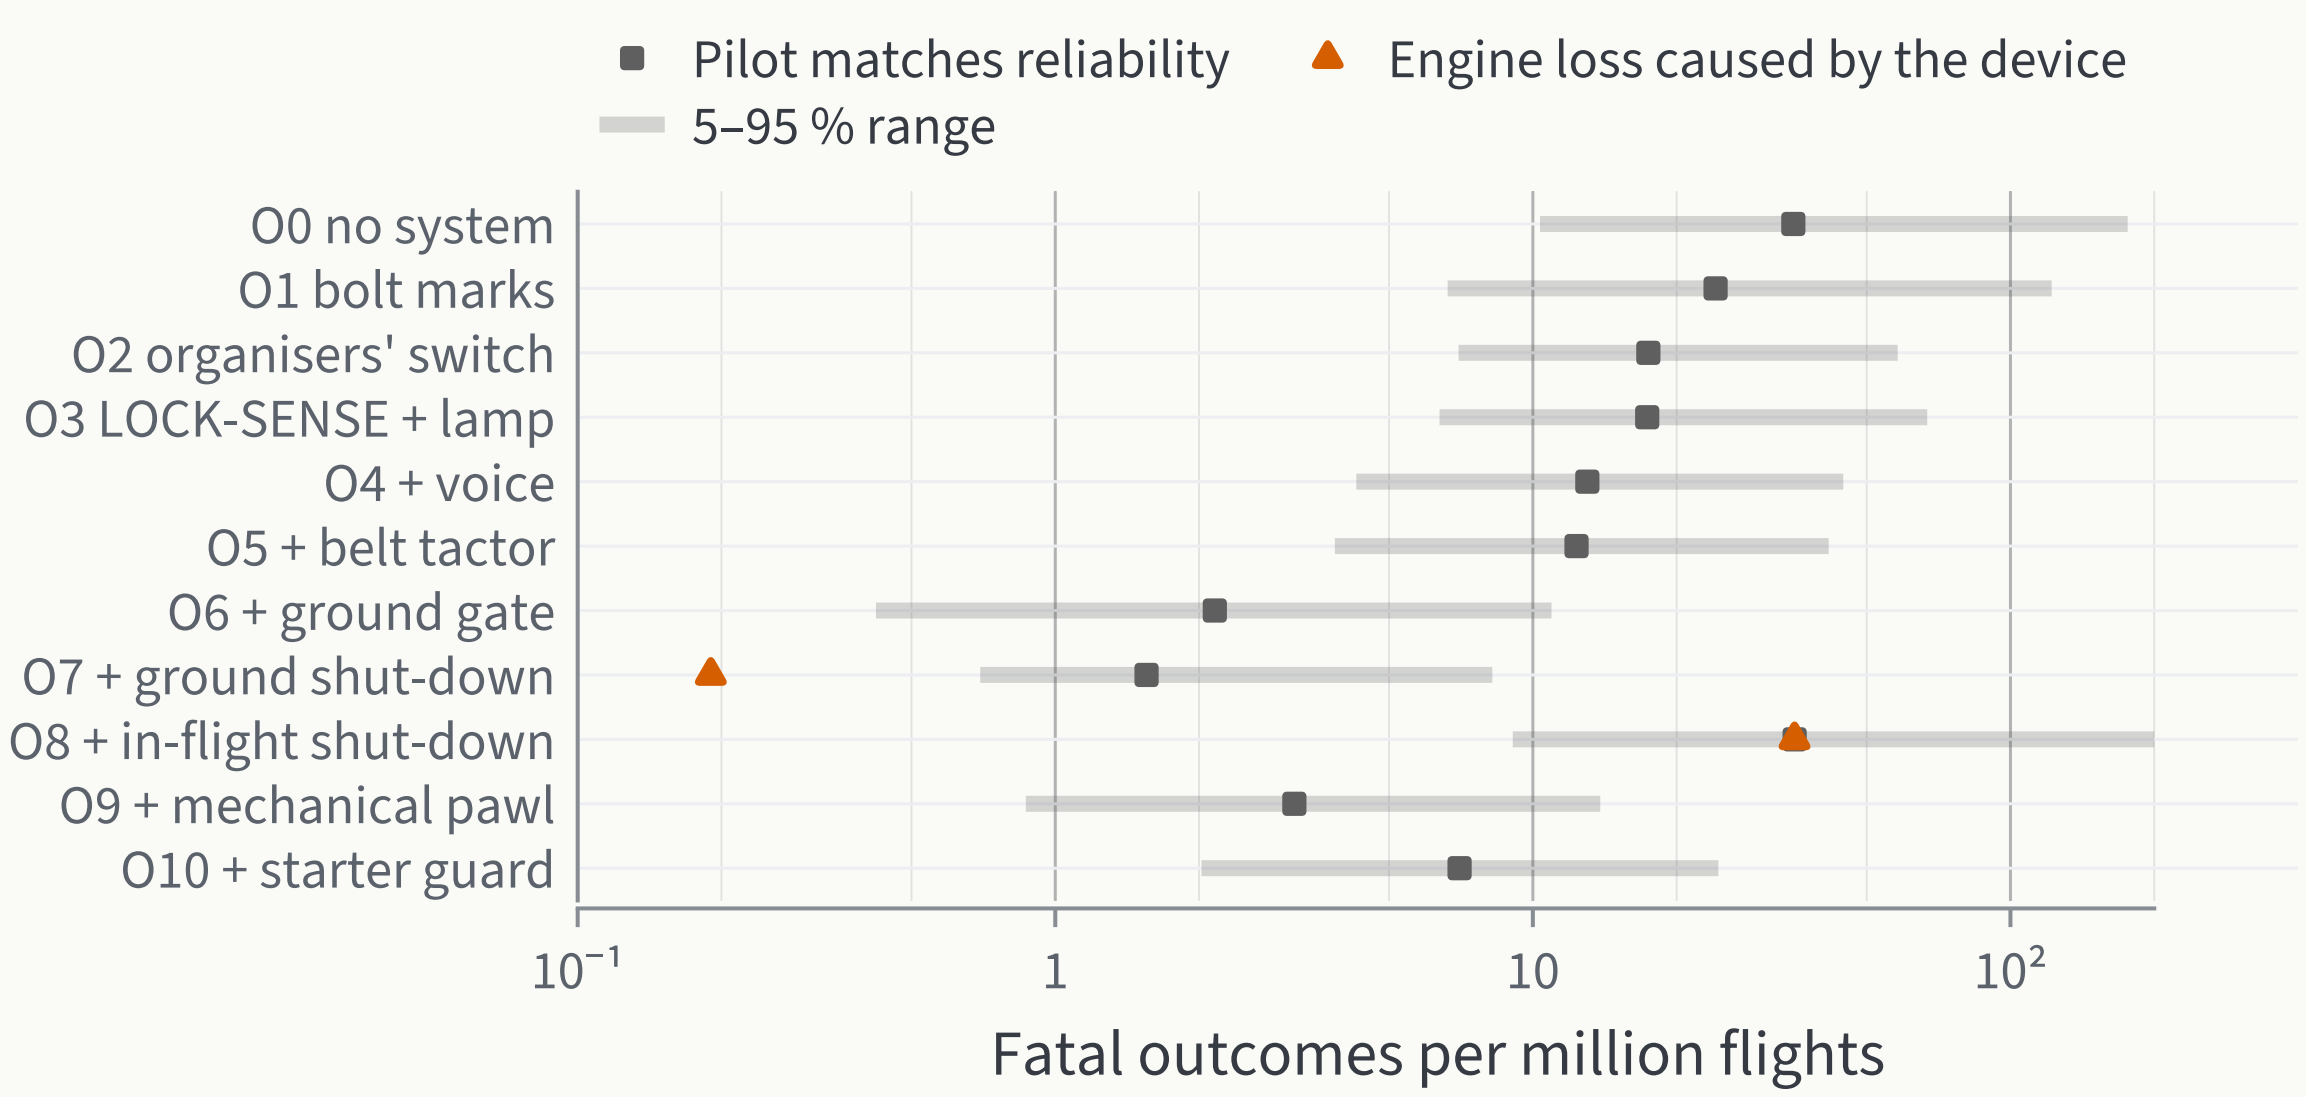
Pilot matches reliability
Engine loss caused by the device
5–95 % range
O0 no system
O1 bolt marks
O2 organisers' switch
O3 LOCK-SENSE + lamp
O4 + voice
O5 + belt tactor
O6 + ground gate
O7 + ground shut-down
O8 + in-flight shut-down
O9 + mechanical pawl
O10 + starter guard
10^{-1}
1
10
10^{2}
Fatal outcomes per million flights