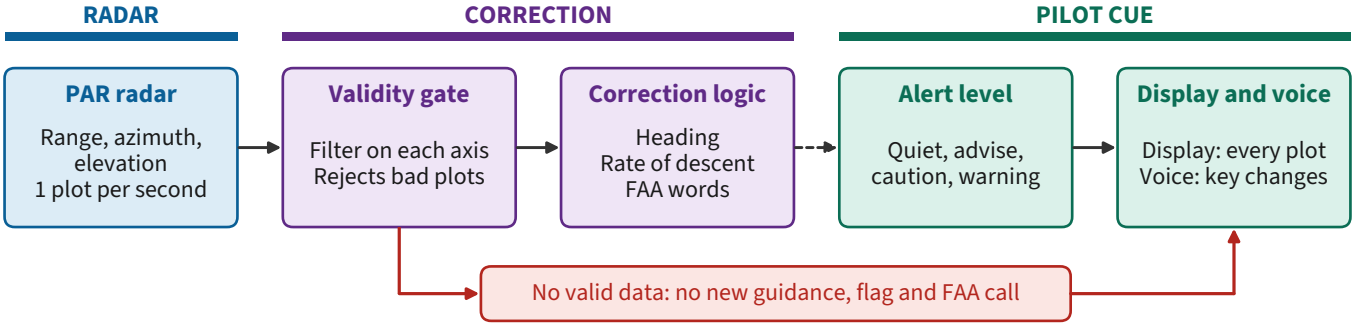
RADAR
CORRECTION
PILOT CUE
PAR radar
Range, azimuth, elevation
1 plot per second
Validity gate
Filter on each axis
Rejects bad plots
Correction logic
Heading
Rate of descent
FAA words
Alert level
Quiet, advise, caution, warning
Display and voice
Display: every plot
Voice: key changes
No valid data: no new guidance, flag and FAA call